



FHEX24




Aluminum LED Edgelit Exit Sign

- Push-to-test switch
- LED charge indicator
- AC and EM models
- Field applied chevron directional indicators
- Maintenance free, 3.6V, 500mAh NiCd battery
- Universal mount
- Energy saving LED lamp source
- Dual voltage 120V/277V
- UL Listed in accordance with UL924
- High-Polish, injection-molded acrylic panel, welded to eliminate visible hardware


General Specifications

	FHEX24 (Red)	FHEX24 (Green)
Input Voltage	120/277VAC	120/277VAC
Input Current (120V)	27mA	27mA
Input Current (277V)	12mA	12mA
Input Power (120V)	3.0W	3.0W
Input Power (277V)	3.0W	3.0W
Operating Frequency	60Hz	
Battery Type	3.6V, 500mAh NiCd Battery	
Operating Ambient Temperature Range (Ta)	0°C to 50°C / 32°F to 122°F	
Overall Size	12.75" L x 11" H	
Emergency Operation	90 minutes	
Compliance	UL 924 Listed	
	CEC Title 20 Compliant	
	Damp Location	
Warranty	5 years from the date of manufacture	

Mechanical Data

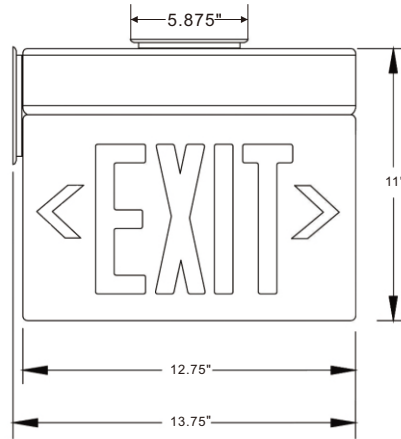

FRONT VIEW

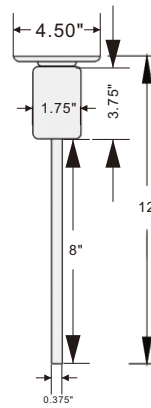

SIDE VIEW

NOTE:
1) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.

Part Number Matrix

FHEX24

Active Part Numbers

- FHEX24ADGEM
- FHEX24ADREM
- FHEX24ASGEM
- FHEX24ASREM
- FHEX24WSGEM

A

Case Color
A = Aluminum
W = White

S

Number of Faces
S = Single
D = Double

R

Letter Color
R = Red
G = Green

EM

Operation
EM = Battery Backup