



## Features

- Support DALI-2 pushDIM + pushCCT control
- DALI-2 101,102, 207, 209
- Soft dimming and flicker-free at any brightness
- Dimming range 1~100%,support multiple lights dimming
- Standby power input<0.5W, meets the requirements of ErP certification
- High PF, high efficiency, low THD
- SELV and Class II design, suitable for use inside of the light
- Complies to CE & RCM Standard
- IP20 protection grade, indoor use
- Nominal life-time up to 100,000 h

## Interfaces

- DALI-2 (DALI-2 DT8)
- PUSH (pushDIM, pushCCT, corridorDIM)

## Functions

- PUSH dimming (pushDIM) with memory
- Support self-contained emergency application
- Protective features (short-circuit, overload, no-load protection )

## Suitable for lights

- Suitable for CV strip lights, CV linear lights, floor lights, three-proof lights, etc

## Typical applications

- LED Flexible strips
- LED Signage Modules
- LED Indoor lighting

MODEL	Input Voltage	Output Power	Output Voltage	Output Current	Dimensions
T1A2240024V-200EE G2	240Vac	200W	24V	8.33A	429.5*32*23.5mm





# T1A2240024V-200EE G2

## SPECIFICATIONS



- DALI-2 DT8 Constant Voltage LED Driver
- Output Wattage : 200W Max
- Flicker Free: O/P Ripple current < 5% (LF)
- Output voltage 24Vdc
- Linear PC Cabinet
- Suitable For Dry Locations
- Application:
  - Suitable for CV Strips, Linear Lights
  - Floor lights etc.

### General Specifications


Rated Input Voltage	220-240/240/230VAC, 50/60Hz
Operating Input Voltage Range	196-264VAC,50/60Hz
Input Current	<1.25A (AC 240V)
Input Power	222W
Power Factor	PF>0.95 (230V AC & Full load)
THD	<10% (230V AC & Full Load)
Efficiency (Typical)	90%(230V AC & Full Load)
Driver Type	Constant Voltage
Output Current	8.33A
Output Voltage Range	24V
Output Power	200W Max. (10W Min.)
No load Power	< 0.5W
Number of Output Channels	2 Channels
Class	Class II
Dimming Controller Type/Dimming Range	DALI-2, DT8, 1%-100%
Ambient Operating Temperature Range	-10°C to 45°C
Max. Case Temperature	90°C
Input Surge Protection	L-N:1KV,
Protections	Output Short Circuit : Auto recovery after fault correction Over load : Latch Mode, Auto Recovery after fault correction Output over voltage : Latch Mode, Auto Recovery after fault correction Over temperature : Latch Mode, Auto Recovery after fault correction
Dali Standards	IEC62386-101,102, 207, 209
Standards	BIS, EN61347/-1/-2-13, EN61547, EN 55015, EN 61000-3-2/3-3, EN62384, EN 62493
Withstand Voltage	I/P-O/P(LED):3000VAC
Life	Nominal life-time up to 100,000 hrs. 50,000hrs at Tc. 85°C
Approvals / Class	BIS,CE
Warranty	5 Years
IP Rating	IP20
Weight	0.320Kg

Note : Suitable for indoor application only


Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **05 years @ Tc 85°C** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog ([www.fulham.com](http://www.fulham.com)). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

### Electrical values


Efficiency vs load

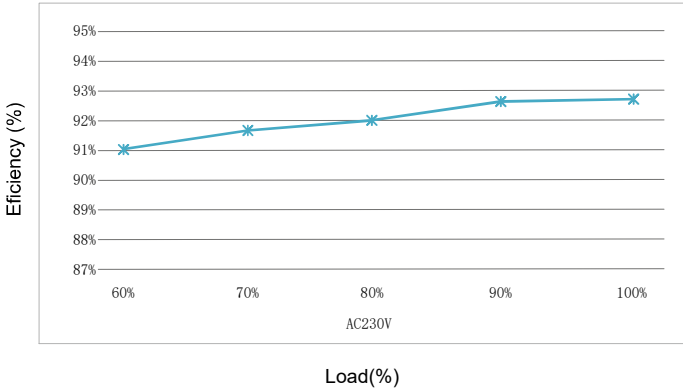


THD vs. Load

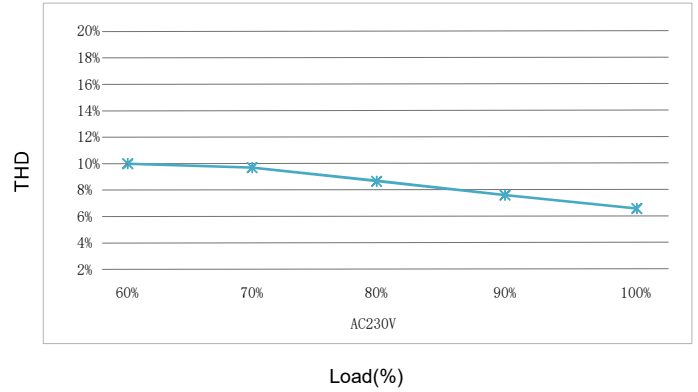

Power factor vs. Load

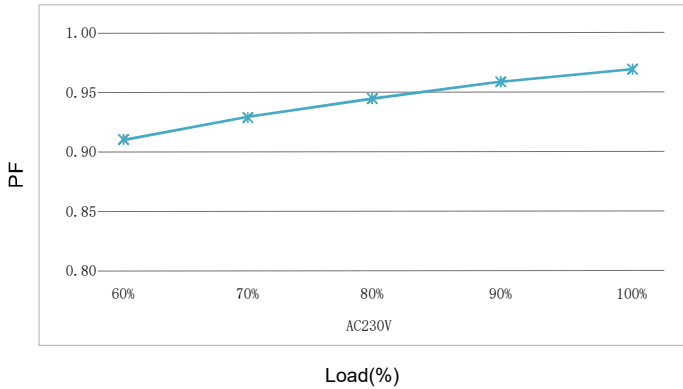

Life vs. Tc curve

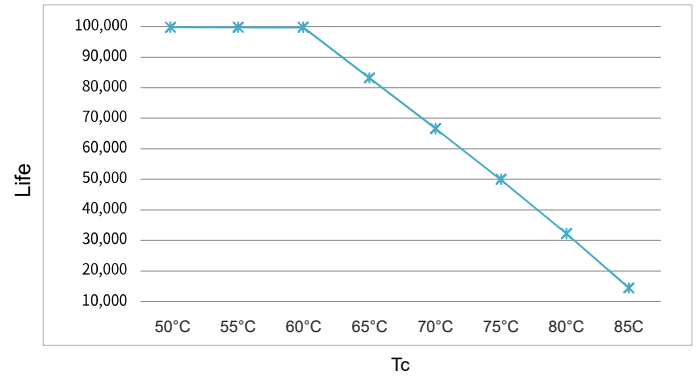


Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **05 years @ Tc 85°C** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog ([www.fulham.com](http://www.fulham.com)). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.



### pushDIM dimming application

#### Wiring diagram

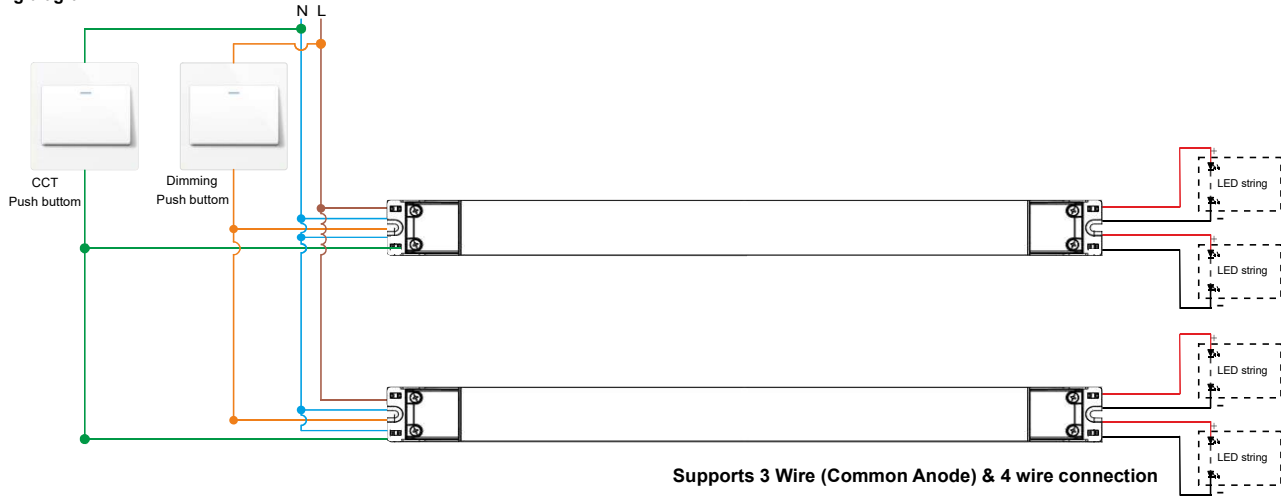

••• Max. x50

#### Activating pushDIM control mode

- After installation according to the wiring diagram of pushDIM, pushCCT control application, short press the dimming pushbutton (pushDIM port) 5 times within 3 seconds, the driver will automatically switch to pushDIM, pushCCT control mode.
- After activating pushDIM, pushCCT control mode, CorridorDIM mode will be automatically closed.

#### Number of mounted drivers


- Up to 50 pcs drivers can be mounted.

#### Dimming pushbutton operating instructions

- Turn on or turn off: short press dimming pushbutton for 0.2-1s.
- Stepless dimming: long press dimming pushbutton for 1-6s. Press again to switch dimming directions.

#### Power on status:

- After power on, the light state will be the same as the last dimming level and the last CCT level.
- If the light is on before the power is turned off, after turning the power back on, the brightness will be the same as the last time, and the color temperature will be the same as the last time.
- If the light is off before the power is turned off, the light will be turned off after the power is turned back on. You need to press the dimming pushbutton for a short time to turn on the light. The brightness after lighting will be the same as the last time, and the color temperature will be the same as the last time.

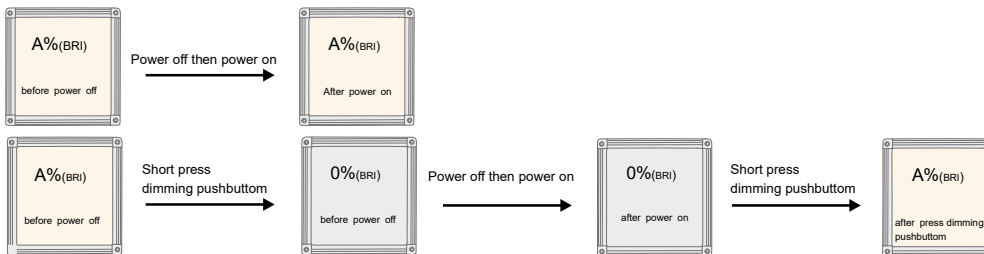

#### Multiple lights synchronize control operation

method 1:

- Step 1: long press the dimming pushbutton, confirm each light is on.
- Step 2: short press the dimming pushbutton, confirm each light is off.
- Step 3: long press the dimming pushbutton, confirm each light is from darkest to brightest and all the lights are synchronous.

method 2:

- Long press the dimming pushbutton for more than 15s, all drivers will output 100% brightness and the color temperature is natural white (middle of color temperature range).

