


SC-120-108-LT5

Rapid Start Fluorescent Ballast

- High Frequency Electronic Ballast
- Input Voltage: 120VAC, 60Hz
- Rapid Start
- UL / cUL Listed, Class P, RoHS

This Ballast Will Operate Following Lamps:




General Specifications

Input Voltage	120VAC, 60Hz
Lamps Operated	1 Lamp
EMI / RFI Compliance	FCC Part 18-A (Consumer)
Sound Rating	"A"
Ballast Type	Rapid Start
Voltage Transients	ANSI 62.41
Input Protection	Fuse
Output Protection	N/A
Min. Operating Temp	-10°C (14°F)
Max. Case Temp	75°C (167°F)
Approvals Class	UL /cUL Listed, Class "P", 1 Outdoor, RoHS Compliant
Warranty	2 Years from the date of manufacture when properly installed.

Electrical Data

Lamp Wattage / Type	Lamps Operated	Input Wattage	Line Current	Power Factor	Ballast Factor	Efficacy Factor	THD	Current Crest Factor
F6T5	1	7.01	0.121	0.482	1.141	16.278	166.2%	1.609
F8T5	1	7.74	0.131	0.491	1.073	13.862	162.7%	1.532
F4T5	1	5.01	0.089	0.470	1.301	25.961	175%	1.914


Mechanical Data

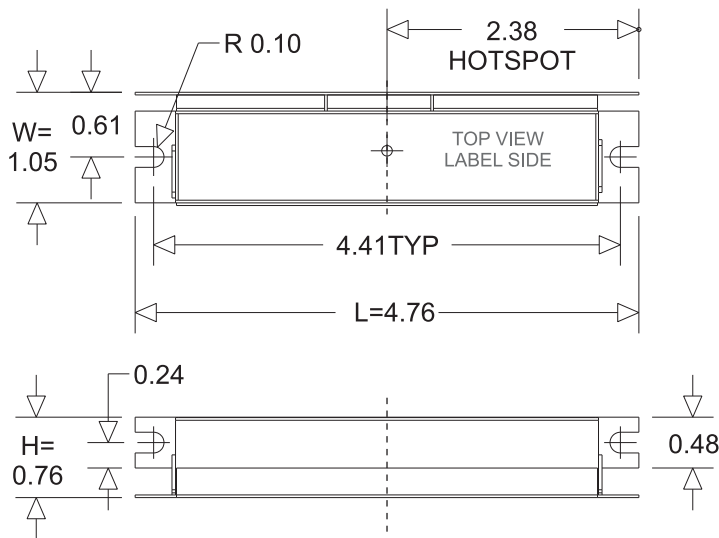

Where : L = Length, W = Width, H = Height

Wiring Diagrams

Wire Color	Length (Inches)
Black	12" ±1"
White	12" ±1"
Red	17" ±1"
Blue	17" ±1"

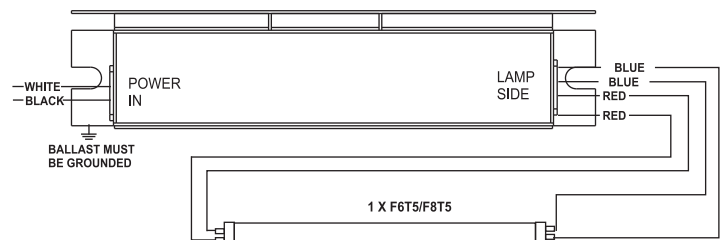

Note: This ballast case must be grounded.