

SPECIFICATION SHEET : NPY-120-217-LT8

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,

This Ballast Will Operate Following Lamps.


F17T8

F20T12

ELECTRICAL DATA


INPUT VOLT: 120V ± 10% , 50/60Hz						
LAMP WATTS/TYPE	F17T8	F20T12	-	-	-	-
LAMPS OPERATED	2					
INPUT WATTS	38	36				
LINE CURRENT:	0.56	0.53				
POWER FACTOR	> .50					
BALLAST FACTOR	1.21	0.99				
EFFICACY FACTOR	3.19	2.79				
THD	132%	134%				
CURRENT CREST FACTOR	< 1.7					
EMI/RFI COMPLIANCE	FCC PART 18 B (CONSUMER)					
SOUND RATING	" A "					
BALLAST TYPE	RAPID START					
VOLTAGE TRANSIENTS	ANSI 62.41					
INPUT/PROTECTION	FUSE					
OUTPUT/PROTECTION	EOL					
MIN. OPERATING TEMP	-20 °C (-4 °F)					
MAX. CASE TEMP	75 °C (167 °F)					
TYPE	"CC" AND "HL" APPROVED					
ENERGY STAR 4.0	-					
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR					

MECHANICAL DATA

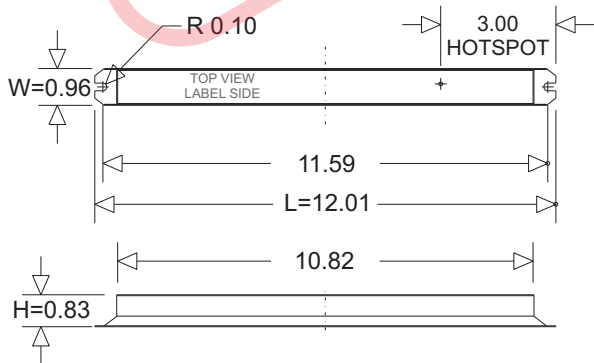

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 ± 1"	12 ± 1"	36 ± 1"	36 ± 1"	36 ± 1"	36 ± 1"

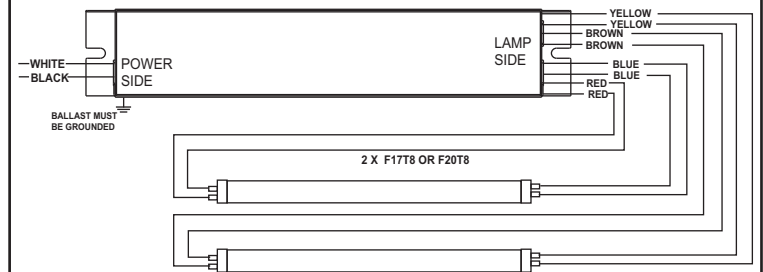

NOTE : This Ballast Case Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.