

Description: 11.5W Square LED Module / 260x260mm / 22LEDs / S11 P2


This LED Module Should be Operated On:

Any LED Driver designed to provide output Current of 350mA and Voltage 33Vdc

ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	33
NOMINAL INPUT CURRENT (mA)	350
NOMINAL POWER CONSUMPTION(W)	11.5
PCB SIZE (mm)	SQUARE 260 x 260MM
PCB MATERIAL TYPE	FR-4
CCT	6500K / 4000K / 2700K
CALCULATED USABLE ARRAY FLUX (lm)	1550 / 1530 / 1420
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	220
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T _c (°C)	75
BEAM ANGLE	120°
CRI (Typ)	80


MECHANICAL DATA

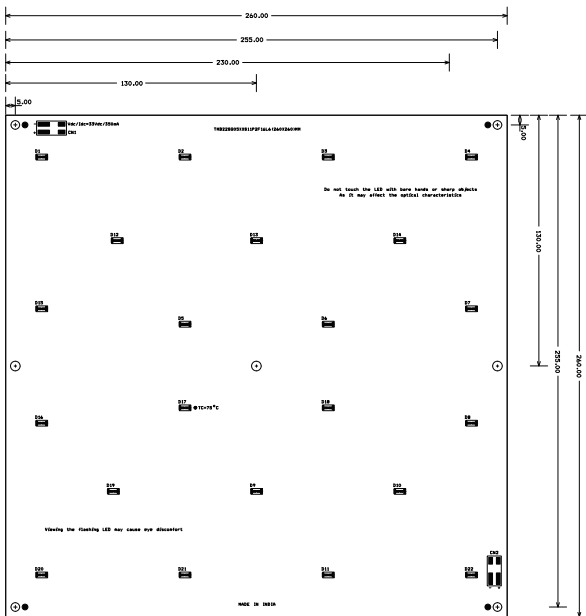

NOTE-ALL DIMENSIONS ARE IN MM

DRILL CHART				
SYM	DIAM	TOL	QTY	NOTE
+	4.200 mm	0.05% / 0.00%	7	MOUNTING HOLES
TOTAL			7	

WIRING DIAGRAMS

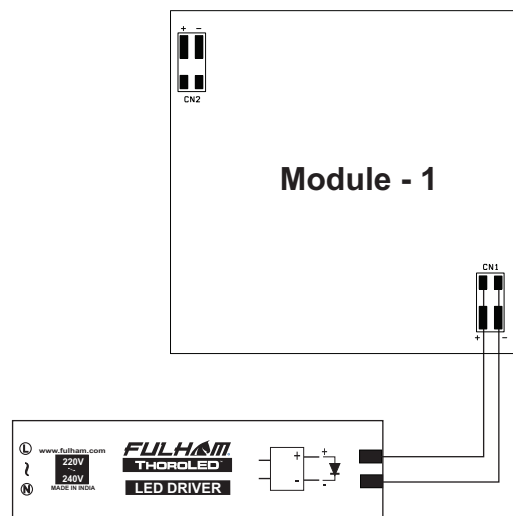

Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.