



Features

- Support DALI-2 pushDIM control
- DALI-2 101,102, 207
- Soft dimming and flicker-free at any brightness
- Dimming range 1~100%,support multiple lights dimming
- Standby power input<0.5W, meets the requirements of ErP certification
- High PF, high efficiency, low THD
- SELV and Class II design, suitable for use inside of the light
- Complies to CE & RCM Standard
- IP20 protection grade, indoor use
- Nominal life-time up to 100,000 h

Interfaces

- DALI-2 (DALI-2 DT6)
- PUSH (pushDIM,corridorDIM)

Functions

- PUSH dimming (pushDIM) with memory
- Support self-contained emergency application
- Protective features (short-circuit, overload, no-load protection)

Suitable for lights

- Suitable for CV strip lights, CV linear lights, floor lights, three-proof lights, etc

Typical applications

- LED Flexible strips
- LED Signage Modules
- LED Indoor lighting


MODEL	Input Voltage	Output Power	Output Voltage	Output Current	Dimensions
T1A1240024V-150EE G2	240Vac	150w	24V	6.25A	336.6*30*18.2mm





T1A1240024V-150EE G2

SPECIFICATIONS



- DALI-2 DT6 Constant Voltage LED Driver
- Output Wattage : 150w Max
- Flicker Free: O/P Ripple current < 5% (LF)
- Output voltage 24Vdc
- Linear PC Cabinet
- Suitable For Dry Locations
- Application:
 - Suitable for CV Strips, Linear Lights
 - Floor lights etc.

General Specifications


Rated Input Voltage	220-240/240/230VAC, 50/60Hz
Operating Input Voltage Range	196-264VAC,50/60Hz
Input Current	<0.9A (AC 240V)
Input Power	165W
Power Factor	PF>0.95 (230V AC & Full load)
THD	<10% (230V AC & Full Load)
Efficiency (Typical)	91%(230V AC & Full Load)
Driver Type	Constant Voltage
Output Current	6.25A
Output Voltage Range	24V
Output Power	150w Max. (10W Min.)
No load Power	< 0.5W
Number of Output Channels	1 Channels
Class	Class II
Dimming Controller Type/Dimming Range	DALI-2, DT6, 1%-100%
Ambient Operating Temperature Range	-10°C to 45°C
Max. Case Temperature	85°C
Input Surge Protection	L-N:1KV,
Protections	Output Short Circuit : Auto recovery after fault correction Over load : Latch Mode, Auto Recovery after fault correction Output over voltage : Latch Mode, Auto Recovery after fault correction Over temperature : Latch Mode, Auto Recovery after fault correction
Dali Standards	IEC62386-101,102, 207
Standards	BIS, EN61347/-1/-2-13, EN61547, EN 55015, EN 61000-3-2/3-3, EN62384, EN 62493
Withstand Voltage	I/P-O/P(LED):3000VAC
Life	Nominal life-time up to 100,000 hrs. 50,000hrs at Tc. 80°C
Approvals / Class	BIS,CE
Warranty	5 Years
IP Rating	IP20
Weight	0.230Kg

Note : Suitable for indoor application only


Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **05 years @ Tc 80°C** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

Electrical values


Efficiency vs load

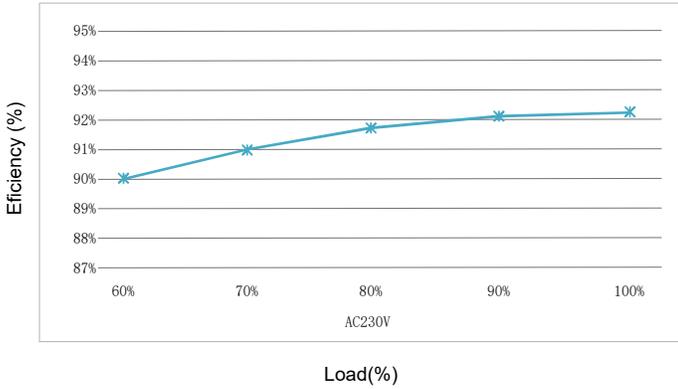


THD vs. Load

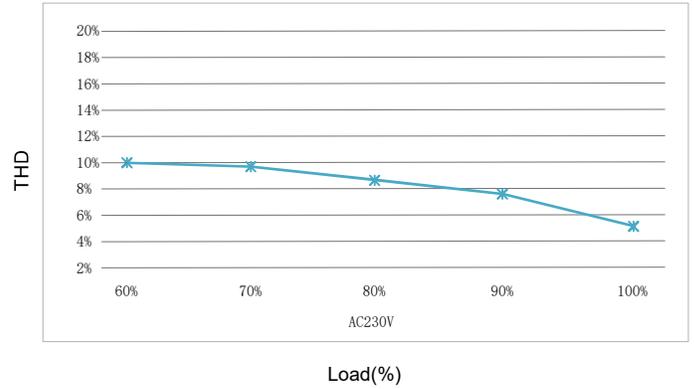

Power factor vs. Load

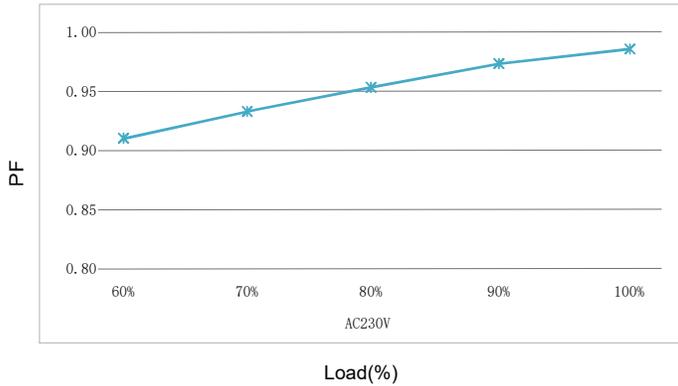


Life vs. Tc curve

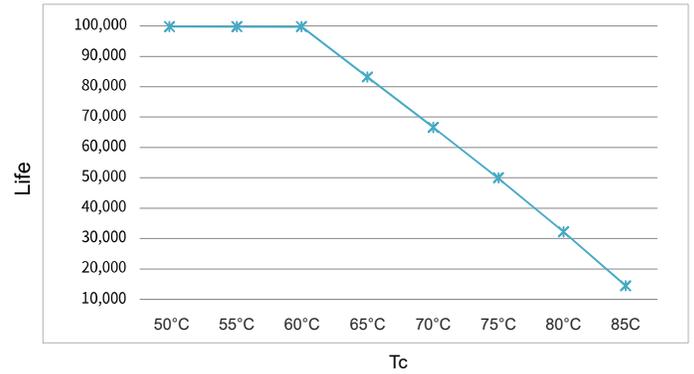

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **05 years @ Tc 80°C** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

DALI dimming application

Wiring diagram

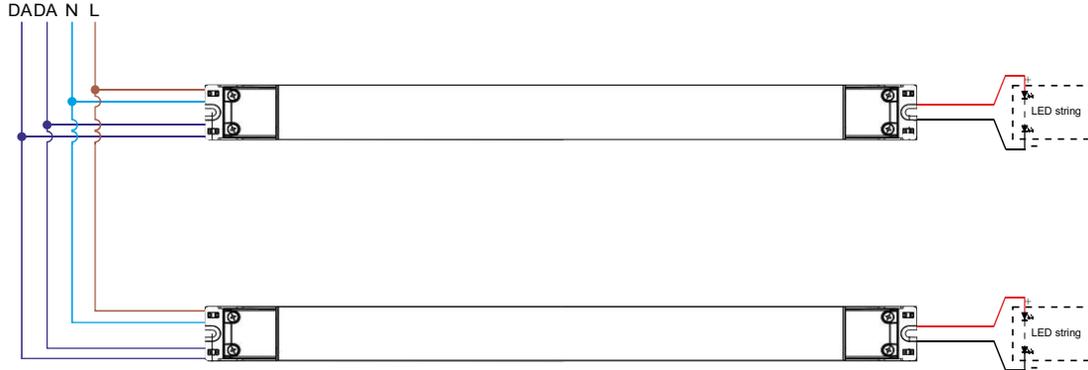

••• Max. x64

Activating DALI control mode

- After installation according to the wiring diagram of DALI control application, the driver will automatically switch to the DALI control mode after receiving any DALI command.


Remarks:

- Standard DALI control line voltage range : 9.5V to 22.5V, Type 16V.
- The two DALI control lines polarity -reversible
- Max. 64 DALI drivers per DALI control line.
- The maximum distance length of the DALI CONTROL LINE IS 300MM AT 2X1.5MM²
- DALI bus can be wired together with any main voltage cables, but separate wiring is recommended.

Wiring distance vs cable size

Cable size	Distance
2×0.50mm ²	max.100m
2×0.75mm ²	max.150m
2×1.00mm ²	max.200m
≥2×1.50mm ²	max.300m

Dimming curve

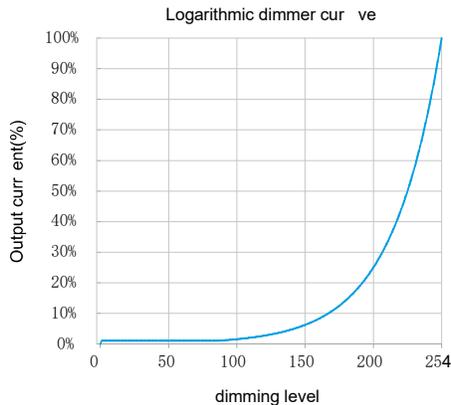


Remarks:

The dimming curve can be selected by DALI configuration. The default is logarithmic dimming curve.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **05 years @ Tc 80°C** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.
© Fulham Company Limited, All Rights Reserved.

pushDIM dimming application

Wiring diagram

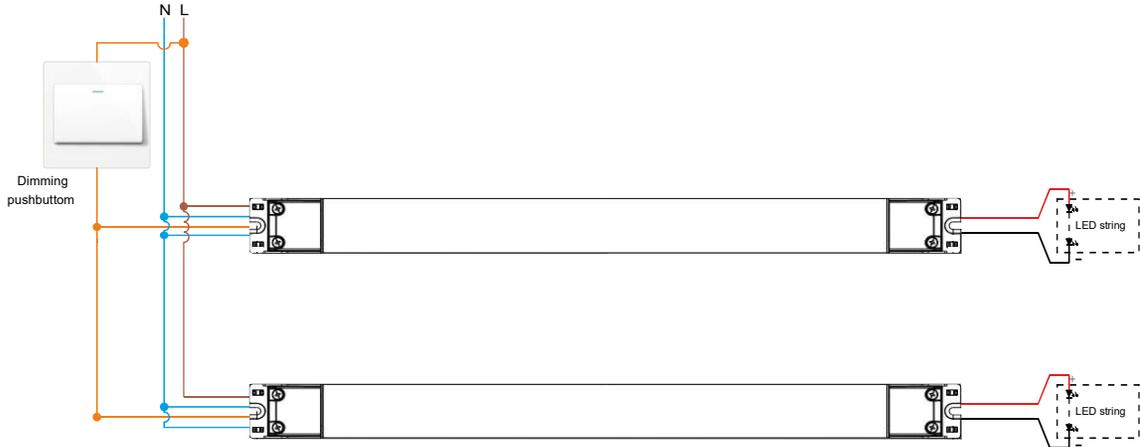

••• Max. x50

Activating pushDIM control mode

- After installation according to the wiring diagram of pushDIM, pushCCT control application, short press the dimming pushbutton (pushDIM port) 5 times within 3 seconds, the driver will automatically switch to pushDIM, pushCCT control mode.
- After activating pushDIM, pushCCT control mode, CorridorDIM mode will be automatically closed.

Number of mounted drivers


- Up to 50 pcs drivers can be mounted.

Dimming pushbutton operating instructions

- Turn on or turn off: short press dimming pushbutton for 0.2-1s.
- Stepless dimming: long press dimming pushbutton for 1-6s. Press again to switch dimming directions.

Power on status:

- After power on, the light state will be the same as the last dimming level and the last CCT level.
- If the light is on before the power is turned off, after turning the power back on, the brightness will be the same as the last time, and the color temperature will be the same as the last time.
- If the light is off before the power is turned off, the light will be turned off after the power is turned back on. You need to press the dimming pushbutton for a short time to turn on the light. The brightness after lighting will be the same as the last time, and the color temperature will be the same as the last time.

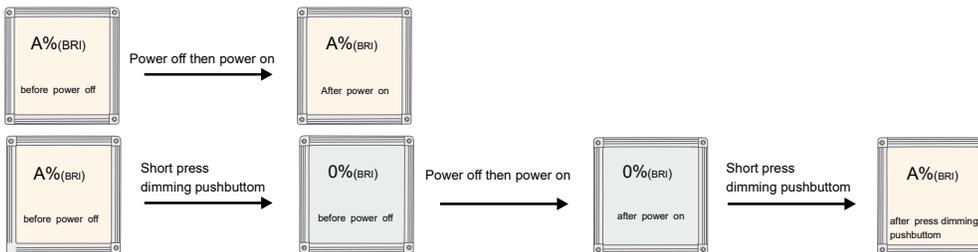

Multiple lights synchronize control operation


method 1:

- Step 1: long press the dimming pushbutton, confirm each light is on.
- Step 2: short press the dimming pushbutton, confirm each light is off.
- Step 3: long press the dimming pushbutton, confirm each light is from darkest to brightest and all the lights are synchronous.

method 2:

- Long press the dimming pushbutton for more than 15s, all drivers will output 100% brightness and the color temperature is natural white (middle of color temperature range).


Mechanical Data :

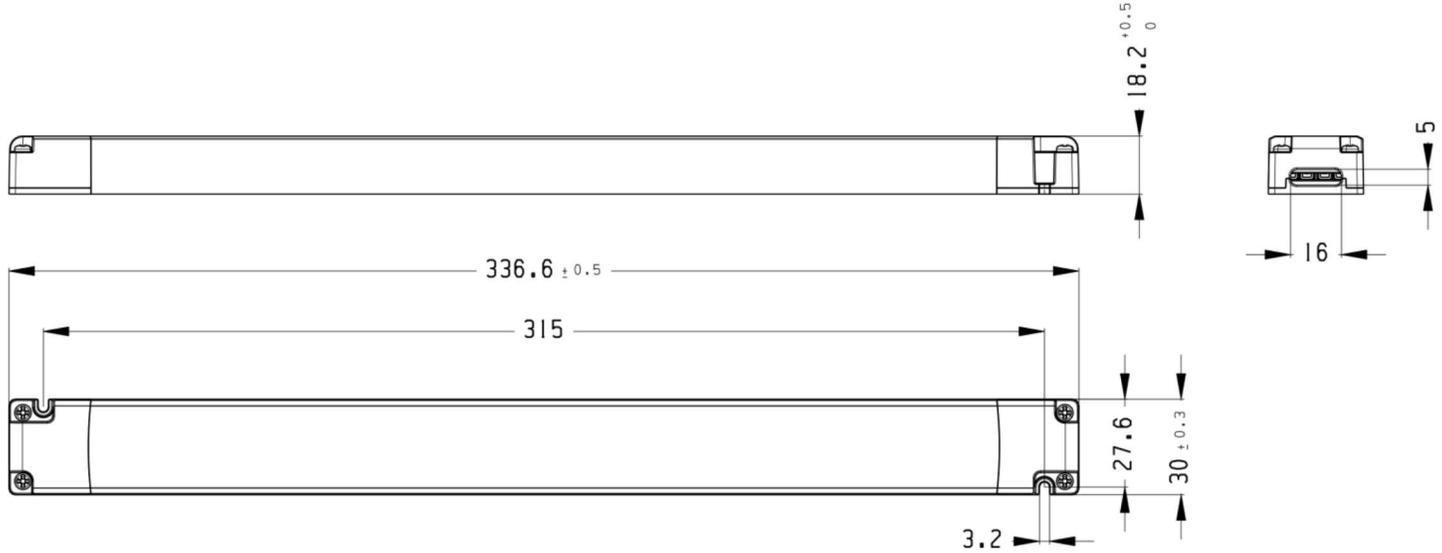

Note : All Dimensions are in mm.

Tolerance=±0.5mm

Packaging

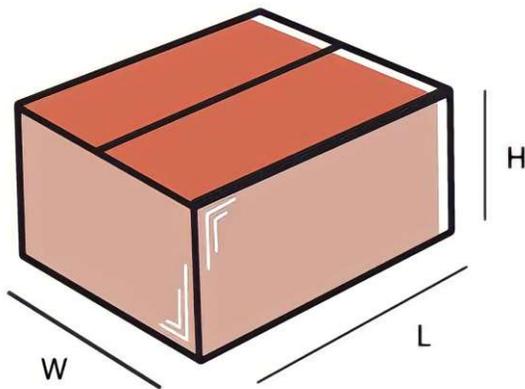

Master carton

OUTER DIMENSION		
L	W	H
350mm	150mm	125mm
Net Weight	Gross Weight	QUANTITY
3.8 kg	4.4 kg	20 pc.

Installation Instructions:

Connect Wires as per details given on the Driver Screen. Keep proper ventilation around the LED Driver and do not stack any object on it. Also a > 8 cm clearance must be kept when the adjacent device is a heat source. Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of **05 years @ Tc 80°C** from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.