




Discontinued
 Contact Fulham for availability. Not for use in new designs.

SPECIFICATION SHEET : WHCG6- 127- T12- RS- L

This Is An Original Product From Fulham Electronic Co., Ltd

Description : WORKHORSE Commercial Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Series Lamp Operation, THD Less Than 25%

This Ballast Will Operate Following Lamps.




F18T8 / F20T12/ F36T8/ F40T12

ELECTRICAL DATA


INPUT VOLT: 127V ± 10%, 50/60Hz					
LAMP WATTS/TYPE	F18 T8		F20 T12		F36 T8
LAMPS OPERATED	1	2	1	2	1
INPUT WATTS	-	36W	-	36W	34W
MAX. LINE CURRENT	-	0.279A	-	0.284A	0.264A
POWER FACTOR	>0.85				
BALLAST FACTOR	0.9				
EFFICIENCY	>88%				
THD	<25%				
CURRENT CREST FACTOR	< 1.7				
EMI/RFI COMPLIANCE	-				
SOUND RATING	-				
BALLAST TYPE	RAPID START				
VOLTAGE TRANSIENTS	-				
INPUT/PROTECTION	FUSE				
OUTPUT/PROTECTION	EOL				
MIN. OPERATING TEMP	- 10 °C (14 ° F)				
MAX. CASE TEMP	75 °C (167 ° F)				
ENERGY STAR 4.0	-				
APPROVALS/CLASS	-				

MECHANICAL DATA

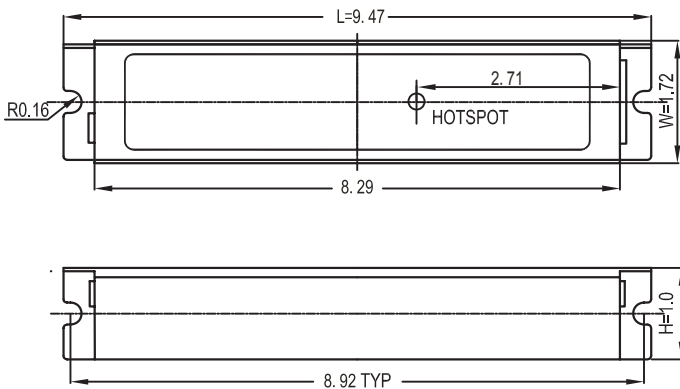

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

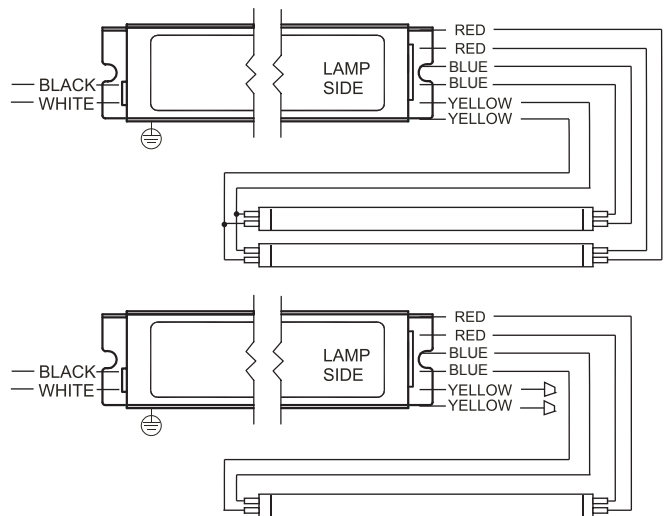

NOTE : This Ballast Must Be Grounded

Fulham Electronic Co., Ltd extends limited warranty only to the original purchaser or to the first user for the period of 3 years from the date of manufacture when properly installed and under normal conditions of use.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM ELECTRONIC Co.,LTD RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave. , Hawthorne CA 90250, U. S. A Tel.:323-599-5001 Website: www.fulham.com