


SPECIFICATION SHEET : WHCG9-127-T12-RS

This Is An Original Product From Fulham Electronic Co., Ltd

Description : WORKHORSE Commercial Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 25%

This Ballast Will Operate Following Lamps.




F18T8 / F20T12 / F36T8 / F40T12

ELECTRICAL DATA


INPUT VOLT: 127V ± 10%, 50/60Hz							
LAMP WATTS/TYPE	F18 T8	F20 T12	F18 T8	F20 T12	F36 T8	F40 T12	
LAMPS OPERATED	4	4	3	3	2	2	
INPUT WATTS	69W	69W	-	-	-	-	
MAX. LINE CURRENT	0.541A	0.545A	-	-	-	-	
POWER FACTOR	>0.85						
BALLAST FACTOR	0.9						
EFFICACY FACTOR	>88%						
THD	<25%						
CURRENT CREST FACTOR	< 1.7						
EMI/RFI COMPLIANCE	-						
SOUND RATING	-						
BALLAST TYPE	RAPID START						
VOLTAGE TRANSIENTS	-						
INPUT/PROTECTION	FUZE						
OUTPUT/PROTECTION	EOL						
MIN. OPERATING TEMP	- 10 °C (14 ° F)						
MAX. CASE TEMP	75 °C (167 ° F)						
ENERGY STAR 4.0	-						
APPROVALS/CLASS	-						

MECHANICAL DATA

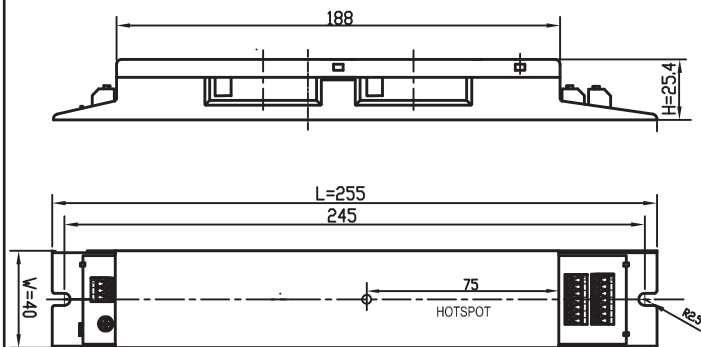

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

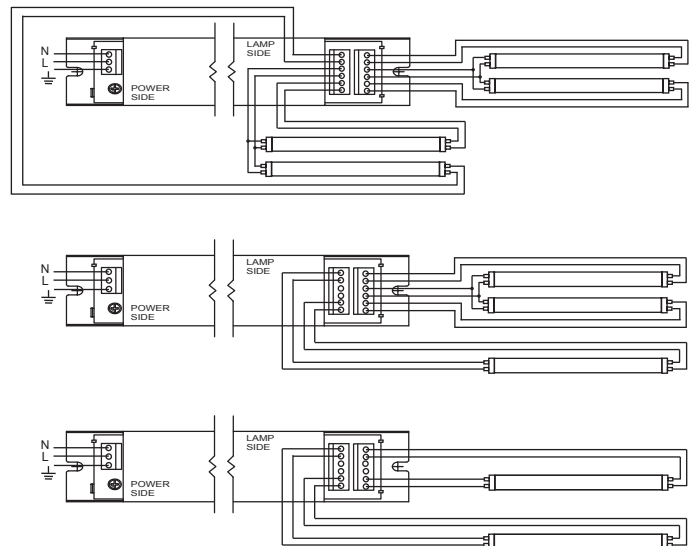

NOTE : This Ballast Must Be Grounded

Fulham Electronic Co., Ltd extends limited warranty only to the original purchaser or to the first user for the period of **3 years** from the date of manufacture when properly installed and under normal conditions of use.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM ELECTRONIC Co.,LTD RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address : 12705 South Van Ness Ave. , Hawthorne CA 90250, U. S. A Tel.:323-599-5001 Website: www.fulham.com