

TCD4UNV0300-34L, TCD4UNV0350-39L, TCD4UNV0385-42L

This Is An Original Product From Fulham


Description: Independent direct current power supply. Wide range input voltage from 120-277V. Constant current output to 34/39/42 Watts.

This Driver Will Operate Following LED Modules: Any module designed to accept constant current input up to 300, 350 or 385mA maximum.

ELECTRICAL DATA

MODEL	TCD4UNV0300-34L	TCD4UNV0350-39L	TCD4UNV0385-42L
INPUT VOLT	120 ~ 277± 10% 50/60Hz		
POWER FACTOR	> 0.9		
EFFICIENCY	> 84% @ 120, > 86% @ 277V		
CURRENT PROTECTION	YES		
CONSTANT CURRENT, VOLTAGE OR POWER	300mA	350mA	385mA
OUTPUT VOLTAGE	22 ~ 27V		
OUTPUT SHORT CIRCUIT PROTECTION	YES		
OUTPUT OPEN CIRCUIT PROTECTION	YES		
OUTPUT TO GROUND SHORT PROTECTION	YES		
OVERLOAD PROTECTIONS	YES		
DIMMING CONTROLLER TYPE	0-10V		
DIMMING RANGE	100-10%		
MAX CASE HOT SPOT TEMPERATURE	70°C		
MIN LAMP STARTING TEMPERATURE	0°C		
SERVICE LIFE	50,000 Hours		
APPROVAL/CLASS	cURus, Class2, Damp Location, FCC Part 15, Class A		


MECHANICAL DATA

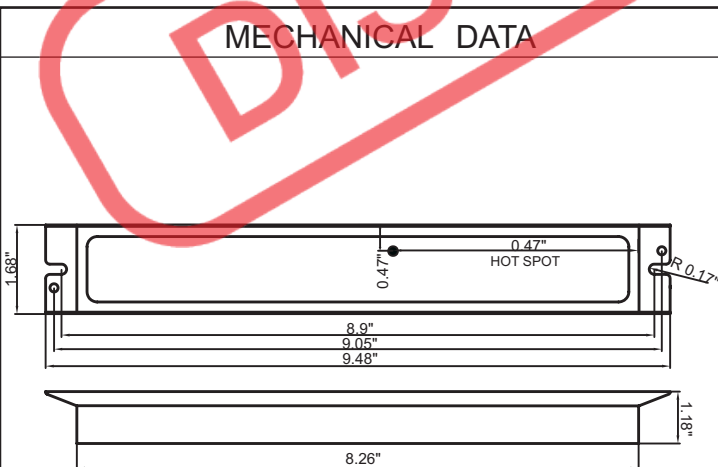

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK (OUTPUT)	RED	GREEN/YELLOW	BLACK (LINE)	WHITE	VIOLET	GREY
LENGTH (INCHES)	12"	12"	6"	6"	6"	6"	6"

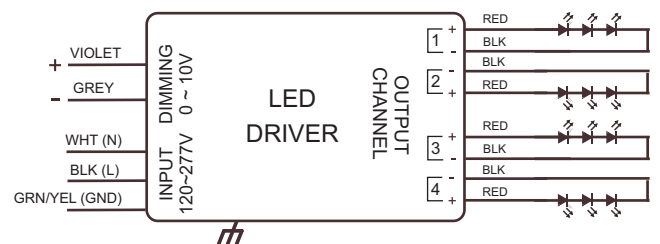

NOTE : This Driver Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.