



# FHEC31


## Thermoplastic Micro LED Exit Sign/Emergency Light Combo

- Injection-molded, high impact, UV-stabilized, UL94 V-0 thermoplastic
- Push-to-test Switch
- LED Charge Indicator
- Maintenance free, 6V sealed lead-acid battery
- Snap-fit faceplate design for installation without tools, extra faceplate included
- Fully adjustable glare free lighting heads
- Two 5.4W DC 5 wedge-base lamps for emergency
- Dual voltage 120V/277V
- UL Listed in accordance with UL924


### General Specifications

	Red	Green	Self Diagnostic	Remote Capable
Input Voltage	120/277VAC			
Input Current (120V)	10mA	10mA	10mA	120mA
Input Current (277V)	5mA	5mA	5mA	60mA
Input Power (120V)	10W	10W	10W	15W
Input Power (277V)	10W	10W	10W	15W
Operating Frequency	60Hz			
Overall Size	21.8" L x 10.875" H			
Emergency Operation	90 minutes			
Compliance	UL 924 Listed Damp Location			
Warranty	5 years from the date of manufacture			

### Mechanical Data

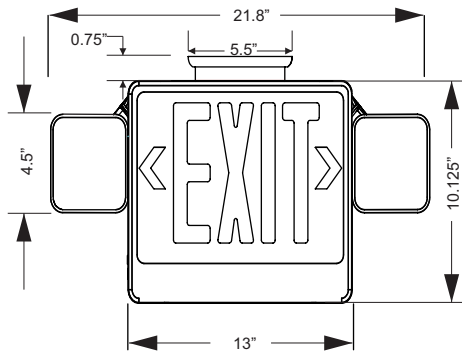

FRONT VIEW

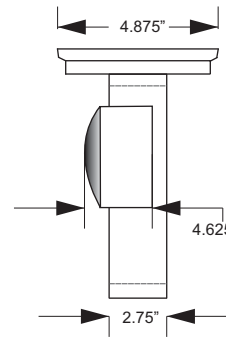

SIDE VIEW

### Part Number Matrix

# FHEC31

# W

# R

# RC

Case Color  
W = White  
B = Black

Letter Color  
R = Red  
G = Green

Options  
RC = Remote Capable  
SD = Self Diagnostic