

# SPECIFICATION SHEET: WH33-120-BLS

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

## **ELECTRICAL DATA**

INPUT VOLT: 120V ± 10%,	50/60Hz							
LAMP WATTS/TYPE	F15T8	F15T8	F17T8					
LAMPS OPERATED	2	3	3					
INPUT WATTS	33	42	51					
LINE CURRENT:	0.29	0.37	0.44					
POWER FACTOR	0.94	0.95	0.95					
BALLAST FACTOR	0.98	0.86	0.59					
EFFICACY FACTOR	2.99	2.05	1.15					
THD	31%	29%	28%					
EMI/RFI COMPLIANCE		FCC PART 18-A (Non-Consumer)						
SOUND RATING				"A"				
BALLAST TYPE				INSTANT START				
VOLTAGE TRANSIENTS				ANSI 62.41				
INPUT/PROTECTION				FUSE				
MIN. OPERATING TEMP				-30 °C (-20 °F)				
MAX. CASE TEMP				70 °C ( 158 °F )				
APPROVALS/CLASS		G	UL/	CUL LISTED, CLASS " P ", 1 OR 2 OUTDOOR				

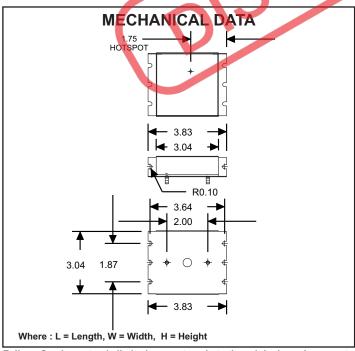

WIRING DIAGRAMS								
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN		
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	12 <u>+</u> 1"	-	12 <u>+</u> 1"	-		

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



# SPECIFICATION SHEET: WH33-120-BLS

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

## **ELECTRICAL DATA**

INPUT VOLT: 120V ± 10%	, 50/60Hz								
LAMP WATTS/TYPE	CFT24/27	CFT24/27	CFT40	2D55W	T5CR22W	T5CR22W	T5CR22W	CFQ26W	CFTR32W
LAMPS OPERATED	1	2	1	1	1	2	3	2	2
INPUT WATTS	28	47	50	54	30	48	65	50	54
LINE CURRENT:	0.25	0.41	0.43	0.47	0.27	0.42	0.56	0.44	0.47
POWER FACTOR	0.95	0.96	0.96	0.96	0.95	0.96	0.96	0.96	0.96
BALLAST FACTOR	1.00	0.86	1.02	0.88	1.02	0.95	0.87	0.84	0.73
EFFICACY FACTOR	3.50	1.84	2.04	1.62	3.37	1.98	1.35	1.68	1.36
THD	32%	29%	28%	28%	38%	29%	27%	29%	28%
EMI/RFI COMPLIANCE		FCC PART 18-A (Non-Consumer)							
SOUND RATING					"A"				
BALLAST TYPE		INSTANT START							
VOLTAGE TRANSIENTS		ANSI 62.41							
INPUT/PROTECTION					FUSE				
MIN. OPERATING TEMP					30 °C (-20 ° F	• )			
MAX. CASE TEMP		70 °C ( 158 °F )							
APPROVALS/CLASS		UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR							

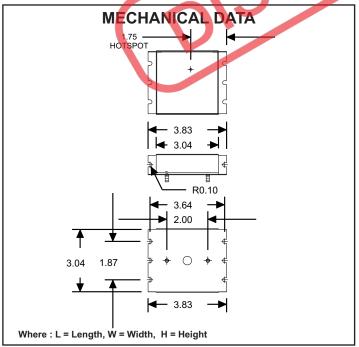

WIRING DIAGRAMS								
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN		
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	12 <u>+</u> 1"	-	12 <u>+</u> 1"	-		

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.



# SPECIFICATION SHEET: WH33-120-BLS

This Is An Original Product From Fulham Co., Inc

Description : WorkHorse Series Versatile, Solid State Electronic Ballast. Small Case Size,


High Power Factor, Light Weight, Available In 120/230/277V 50/60 Hz.

This Ballast Will Operate Following Lamps.

**REFER TO LAMP WATTS/TYPE** 

### **ELECTRICAL DATA**

INPUT VOLT: 120V ± 10%	, 50/60Hz	
LAMP WATTS/TYPE	CFTR26W	
LAMPS OPERATED	2	
INPUT WATTS	51	
LINE CURRENT:	0.45	
POWER FACTOR	0.96	
BALLAST FACTOR	0.87	
EFFICACY FACTOR	1.69	
THD	28%	
EMI/RFI COMPLIANCE		FCC PART 18-A (Non-Consumer)
SOUND RATING		"A"
BALLAST TYPE		INSTANT START
VOLTAGE TRANSIENTS		ANSI 62.41
INPUT/PROTECTION		FUSE
MIN. OPERATING TEMP		-30 °C (-20 °F)
MAX. CASE TEMP		70 °C ( 158 °F )
APPROVALS/CLASS		UL LISTED, CLASS " P ", 1 OR 2 OUTDOOR

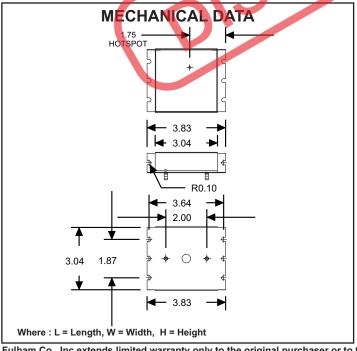

WIRING DIAGRAMS								
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN		
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	12 <u>+</u> 1"	-	12 <u>+</u> 1"	-		

FOR WIRING DIAGRAM,
PLEASE REFER TO FULHAM'S CATALOG

NOTE : This Ballast Must Be Grounded

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.