



Discontinued

Contact Fulham for availability. Not for use in new designs.



FHNY23




Recess-Mount Edge-Lit LED Exit Signs

- Push-to-test switch
- LED charge indicator
- Mirror divider on double face versions
- Field applied chevron directional indicators
- Maintenance free, 6V sealed lead-acid battery
- AC and EM models
- Graduated depth of molded letters provides uniform light distribution on graphics
- Universal mount
- Dual voltage 120V/277V
- New York city approved


General Specifications

| | |
|----------------------|--------------------------------------|
| Input Voltage | 120/277VAC |
| Input Current (120V) | 148mA |
| Input Current (277V) | 131mA |
| Input Power (120V) | 3.0W |
| Input Power (277V) | 2.8W |
| Operating Frequency | 60Hz |
| Overall Size | 14.2" L x 13.5" H |
| Emergency Operation | 90 minutes |
| Compliance | UL 924 Listed |
| | Damp Location |
| Warranty | 5 years from the date of manufacture |

Mechanical Data

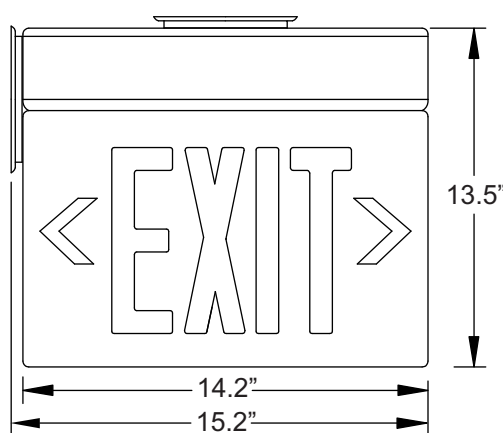

FRONT VIEW

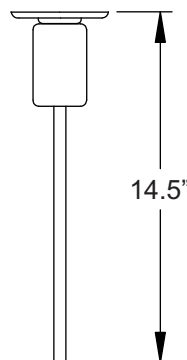

SIDE VIEW

NOTE:

1) In order to maintain proper operation and warranty coverage, the battery must be recharged once per year prior to installation.

Part Number Matrix

FHNY23

S

Number of Faces

S = Single

D = Dual

AC

Operation

AC = AC only

EM = Battery backup