

SPECIFICATION SHEET: WHSG8-UNV-T8SL

This Is An Original Product From Fulham Co., Inc.


Description: WORKHORSE Specifier Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 10%


This Ballast Will Operate Following Lamps.

F96T8, F96T8HO

ELECTRICAL DATA (120V APPLICATION)

INPUT VOLT: 120V ± 10%, 50/60Hz										
LAMP WATTS/TYPE	F96T8	F96T8HO	F96T8	-	-	-		-		
LAMPS OPERATED		1	2							
INPUT WATTS	67	95	109							
LINE CURRENT:	0.56	0.79	0.91							
POWER FACTOR	0.99	0.99	0.99							
BALLAST FACTOR	1.15	0.98	0.99							
EFFICACY FACTOR	1.72	1.03	0.90							
THD	5%	5%	5%							
CURRENT CREST FACTOR	<1.7									
EMI/RFI COMPLIANCE	FCC PART 18-A									
SOUND RATING	" A "									
BALLAST TYPE	INSTANT START									
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993									
INPUT/PROTECTION	FUSE									
OUTPUT/PROTECTION	EOL									
MIN. OPERATING TEMP	0 °C (32 °F)									
MAX. CASE TEMP	70 °C (158 °F)									
TYPE "HL" APPROVAL	APPROVED FOR HAZARDOUS LOCATION									
ENERGY STAR 4.0					-					
APPROVALS/CLASS	UL /cul listed, class " P ", 1 OUTDOOR									
REMOTE MOUNTING	18 FT MAX.									

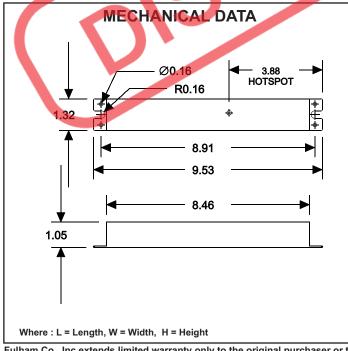

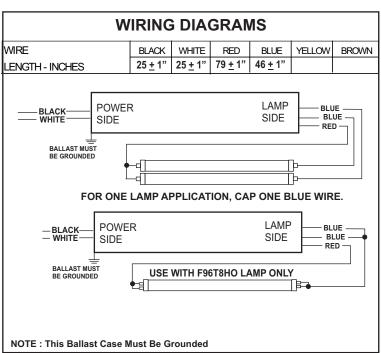

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 5 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-800-2-Fulham.</u>
DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-800-2-fulham, Fax.: 1-323-754-9060. Website: www.fulham.com 02-2006-151-1 rev C



SPECIFICATION SHEET: WHSG8-UNV-T8SL

This Is An Original Product From Fulham Co., Inc


Description: WORKHORSE Specifier Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 10%


This Ballast Will Operate Following Lamps.

F96T8, F96T8HO

ELECTRICAL DATA (230V APPLICATION)

INPUT VOLT: 230V ± 10%, 50/60Hz										
F96T8	F96T8HO	F96T8	-	1	1		-			
	1	2								
66	93	107								
0.30	0.41	0.47								
0.98	0.98	0.99			1					
1.15	0.98	0.99								
1.73	1.05	0.92								
8%	8%	8%								
< 1.7										
FCC PART 18-A										
" A "										
INSTANT START										
ANSI C82.11 - 1993										
FUSE										
EOL										
0 °C (32 ° F)										
70 °C (158 °F)										
APPROVED FOR HAZARDOUS LOCATION										
UL /cUL LISTED, CLASS " P ", 1 OUTDOOR										
	66 0.30 0.98 1.15 1.73	F96T8 F96T8HO 1 66 93 0.30 0.41 0.98 1.15 0.98 1.73 1.05	F96T8	F96T8	F96T8	F96T8	F96T8 F96T8HO F96T8	F96T8 F96T8HO F96T8		



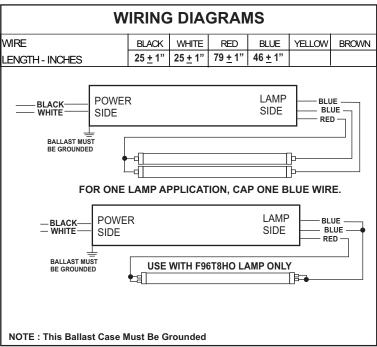

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-800-2-Fulham.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.

Address: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-800-2-fulham, Fax.: 1-323-754-9060. Website: www.fulham.com 02-2006-151-2 rev C



SPECIFICATION SHEET: WHSG8-UNV-T8SL

This Is An Original Product From Fulham Co., Inc


Description: WORKHORSE Specifier Grade Series Electronic Ballast, Drop In Replacement for Magnetic Ballast, Parallel Lamp Operation, THD Less Than 10%


This Ballast Will Operate Following Lamps.

F96T8, F96T8HO

ELECTRICAL DATA (277V APPLICATION)

INPUT VOLT: 277V ± 10%, 50/60Hz										
LAMP WATTS/TYPE	F96T8	F96T8HO	F96T8	-	-	-		-		
LAMPS OPERATED		1	2							
INPUT WATTS	66	93	107							
LINE CURRENT:	0.25	0.34	0.39							
POWER FACTOR	0.96	0.98	0.98							
BALLAST FACTOR	1.15	0.98	0.99							
EFFICACY FACTOR	1.73	1.05	0.92							
THD	10%	9%	9%						1	
CURRENT CREST FACTOR	<1.7									
EMI/RFI COMPLIANCE	FCC PART 18-A									
SOUND RATING	" A "									
BALLAST TYPE	INSTANT START									
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993									
INPUT/PROTECTION	FUSE									
OUTPUT/PROTECTION	EOL									
MIN. OPERATING TEMP	0 °C (32 ° F)									
MAX. CASE TEMP	70 °C (158 ° F)									
TYPE "HL" APPROVAL	APPROVED FOR HAZARDOUS LOCATION									
ENERGY STAR 4.0										
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR									



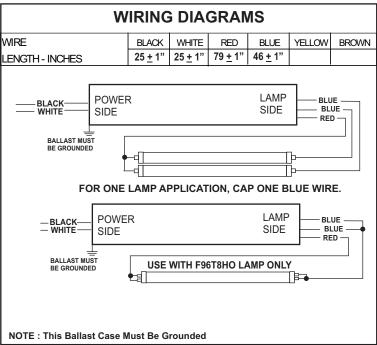

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>5 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-800-2-Fulham.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.