



# LINEAR DIMMABLE DRIVERS

## Key features


- 0-10V Dimmable (Dimming range 10%-100%).
- Flexible current settings (Dipswitch – 4 currents).
- Slim Linear form factor (L-183,W-30,H-23mm)
- Life 50,000Hrs at max Tc.
- Inbuilt input over voltage cutoff with 440V sustenance for 8Hrs.
- O/P Current selection option with Switch provision.
- O/P Open & short circuit protection.
- O/P overload & O/P to ground short circuit protection.

MODEL	WATTAGE (W)	VOLTAGE (V)	CURRENT (MA)	SURGE	IP RATING	DIMENSIONS (MM)
T1M1240060S-30LB	30	30 - 50	450 - 600	4KV	IP20	183x30x23
T1M1240080S-40LB	40	30 - 50	650 - 800	4KV	IP20	183x30x23
T1M1240100S-40LB	40	24 - 40	850 - 1000	4KV	IP20	183x30x23

## Application

- Indoor application Dry Location
- Recessed luminaries
- In suspended luminaries
- Surface mounted luminaries
- Offices, reception areas, retail outlets, supermarkets.

## Wiring Diagram

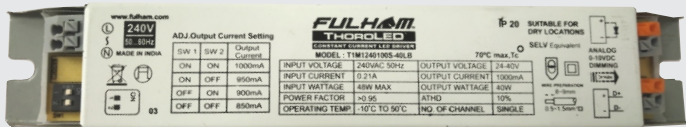

INPUT 2 PIN CONNECTOR	GREY	LINE
	GREY	NEUTRAL

OUTPUT 2 PIN CONNECTOR	ORANGE	POSITIVE
	GREY	NEGATIVE

DIMMING 2 PIN CONNECTOR	ORANGE	POSITIVE
	GREY	NEGATIVE

## Fulham India Pvt. Ltd.

201, Kaliandas Udyog Bhavan, S.T. Marg, Prabhadevi, Mumbai - 400025, Maharashtra, India.  
 Email: sratti@fulham.com | Tel: +91 22 66388775-78 | Web: www.fulham.com