

# DirectAC LED Engine Retrofit Kits: CCT (and Power) Selectable *Flexible, Convenient & Fast*






- 5 CCT choices (2700, 3000, 3500, 4000 or 5000K) via Dip switch on PCB
- Two Power Selectable models (5" Round 15W/20W and 7" Round 25W/30W)
- Dedicated Input: 120VAC +/-10%, (50/60Hz)
- 120V TRIAC & ELV Dimmable, 100%-10%
- CRI90 standard; LEDs w/ advanced phosphor technology for superior efficacy
- Color Consistency @ 25°C : 5 SDCM
- Compatible with both Fulham's HotSpot FHSCP-UNV-6W-L-SD and FireHorse 25W Micro-Inverter Emergency Solutions
- 3mm, 5VA frosted lens provided
- L70 => 72,000hrs, L90 = 36,000hrs @ Tc\_Module = 90°C
- FCC Part 15B Consumer, EN55015
- 5 Year Warranty @ Tc 90°C from the date of manufacture

*Fulham has propelled the industry forward yet again – this time with CCT (and two Power Selectable) DirectAC LED Engine Retrofit Kits suitable for open or fully enclosed luminaires with plastic or glass lenses. Utilize the included frosted lens for diffused light and obscured LEDs. Reduce SKUs and speed time to market with these high output, high efficacy items!*



Power Selector on  
two higher-powered  
Round models

CCT Switch  
common to all  
models

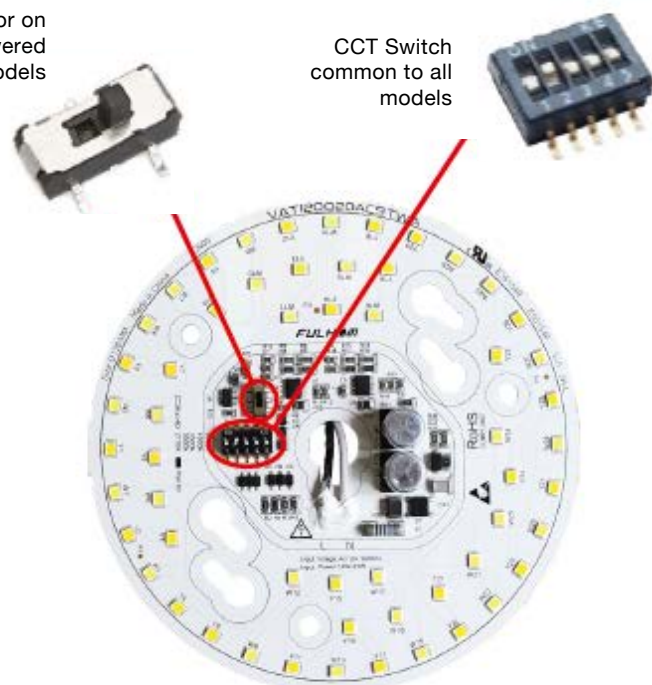

## Specifications

<b>Input Voltage</b>	120VAC (+/- 10%), 50/60Hz
<b>Operating Temperature Range</b>	-35°C to 50°C / -31°F to 122°F
<b>Lumen Maintenance @105°C</b>	L70= >72,000 hours @ Tc max 105°C / L90= 36,000 hours @ Tc max 90°C
<b>Dimming Type / Range</b>	Leading Edge (TRIAC) or Trailing Edge (ELV) / 100% ~ 10%
<b>Color Consistency</b>	Binning per ANSI C78.377-2015 @25°C; Typ. 3 SDCM, Max. 5 SDCM
<b>Fulham Emergency Backup Options</b>	Constant Power w/ conduit FHSCP-UNV-6W-L-SD; 25W Micro-Inverter FHUPS1-UNV-25L-SD
<b>Input Surge Test</b>	2.5kV Common and Differential mode
<b>Warranty</b>	5 years @ Max. Tc 90°C (194°F) from the date of manufacture
<b>Safety/compliance</b>	DirectAC Retrofit Kits: cULus Classified File # E365124 DirectAC Module (without lens): cURus File # E351548 RoHS Compliant, Dry and Damp Location, CEC JA8-2016

## Product Models

Model Number	Input Voltage	Input Power (W)	Lumen Output @4000K/90CRI (lm)	Engine Efficacy @4000K /90CRI (lm/W)	Shape	Dimensions (inches)
<b>VJT120010AC9TWB</b>	120	10	980	98	Round	3.11"Dia. x 0.71" H
<b>VJT120010LN9TWB-06</b>	120	10	980	98	Linear	6.2"L x 2.41"W x 0.665"H
<b>VJT120020AC9TWB</b>	120	15 or 20	1500 or 2000	100	Round	5.12"Dia. x 0.654" H
<b>VJT120030AC9TWB</b>	120	25 or 30	2500 or 3000	100	Round	6.64"Dia. x 0.654" H

CSD= Certified Subcomponent Database

## Part Numbering Key

<b>V</b>	<b>J</b>	<b>T</b>	<b>120</b>	<b>010</b>	<b>AC</b>	<b>9</b>	<b>TW</b>	<b>B-06</b>
Product Line V = VividHorse	Compliance J= DirectAC Retrofit Kit (cULus Classified)	Dimming T = TRIAC	Input Voltage 120 = 120VAC	Estimated or Factory Set Power 010 = 10W 020 = 15 or 20W 030 = 25 or 30W	Shape AC=Circular LN=Linear	CRI 9 = 90	Color Temperature TW = 2700-5000K CCT Selectable, Factory Default 3000K	Length (for Linear Product Only) 06 = 6.2 inches

DirectAC Engine Retrofit Kit includes mounting hardware, retrofit labels, and installation instructions.

**FULHAM** [www.fulham.com](http://www.fulham.com)

North America • China • Europe • India • Latin America

Fulham Headquarters: 12705 S. Van Ness Avenue, Hawthorne, CA 90250 Tel: +1 (323) 599-5000 Fax: +1 (323) 754-9060 • [order@fulham.com](mailto:order@fulham.com)

All trademarks are the property of their respective owners | ©Fulham Co. Inc., 2019 | PN: FLYER- DIRAC22 | REV: JAN 2025