

## SPECIFICATION SHEET : NPY-120-130-T8

This Is An Original Product From Fulham Co., Inc

**Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,**

**This Ballast Will Operate Following Lamps.**




**F30T8 / F30T12**

### ELECTRICAL DATA


INPUT VOLT: 120V ± 10%, 50/60Hz										
LAMP WATTS/TYPE	F30T8	F30T12								
LAMPS OPERATED	1									
INPUT WATTS	34	28								
LINE CURRENT:	0.45	0.37								
POWER FACTOR	0.6205	0.6306								
BALLAST FACTOR	1.06	0.88								
EFFICACY FACTOR	3.14	3.16								
THD	119%	116%								
CURRENT CREST FACTOR	< 1.7									
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)									
SOUND RATING	" A "									
BALLAST TYPE	RAPID START									
VOLTAGE TRANSIENTS	ANSI 62.41									
INPUT/PROTECTION	FUSE									
OUTPUT/PROTECTION	-									
MIN. OPERATING TEMP	0 °C ( 32 ° F )									
MAX. CASE TEMP	75 °C ( 167 ° F )									
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR									

### MECHANICAL DATA

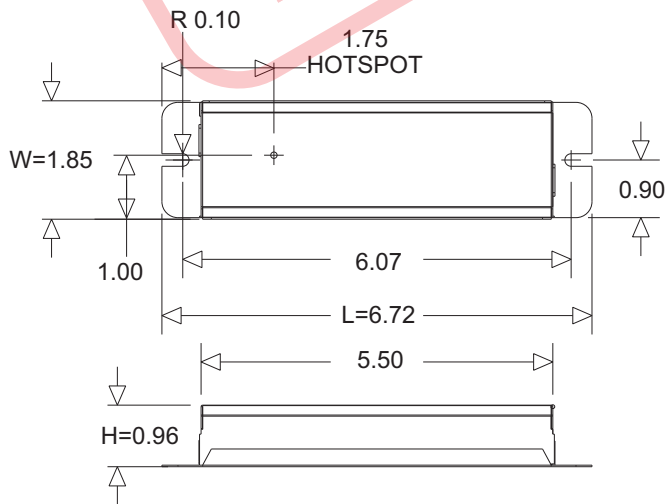

### WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 ± 1"	12 ± 1"	36 ± 1"	36 ± 1"		

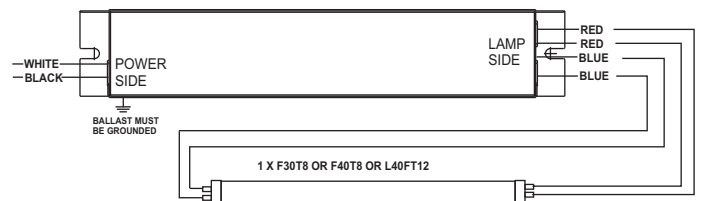

**NOTE : This Ballast Case Must Be Grounded**

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**