

SPECIFICATION SHEET : NPY-120-140-T8

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,

This Ballast Will Operate Following Lamps.




F32T8 / F40T8 / F40T12

ELECTRICAL DATA


INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F32T8	F40T8	F40T12	-	-	-	-	-	-
LAMPS OPERATED	1	1	1						
INPUT WATTS	35.76	42.76	32.02						
LINE CURRENT:	0.483	0.502	0.438						
POWER FACTOR	0.615	0.705	0.607						
BALLAST FACTOR	1.100	1.038	0.812						
EFFICACY FACTOR	3.076	2.426	2.550						
THD	122.90	90.90	124.80						
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	-								
MIN. OPERATING TEMP	0 °C (32 ° F)								
MAX. CASE TEMP	75 °C (167 ° F)								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

MECHANICAL DATA

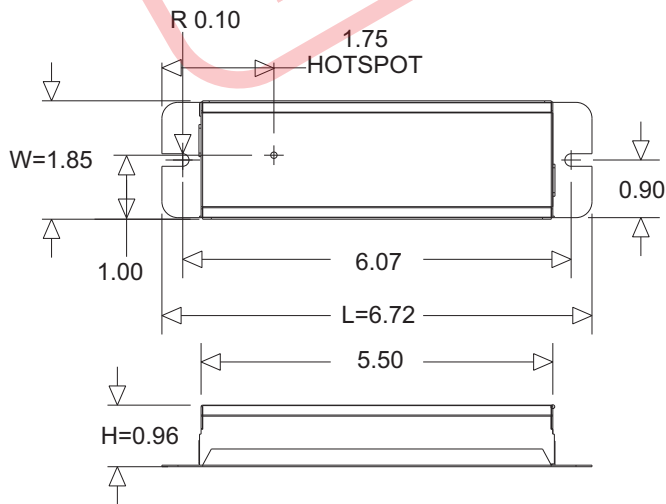

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 ± 1"	12 ± 1"	36 ± 1"	36 ± 1"		

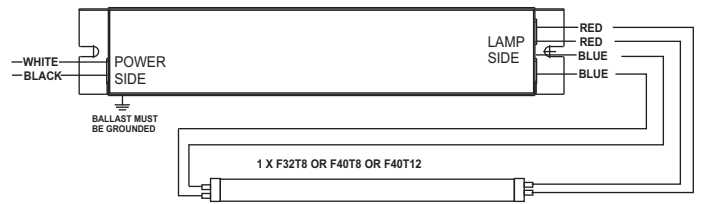

NOTE : This Ballast Case Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.