


## SPECIFICATION SHEET : NPY-120-218-CFL

This Is An Original Product From Fulham Co., Inc

**Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,  
\* Meets Energy Star 4.0 Criteria For Applications Listed.**

**This Ballast Will Operate Following Lamps.**



**TWIN(CFT/E), 4 PIN  
13W**





**QUAD (CFQ/E), 4 PIN  
18W**



**TRIPLE(CFTR/E), 4 PIN  
18W**

### ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	*13CFT/E	*18CFQ/E	*18CFTR/E	-	-	-	-	-	-
LAMPS OPERATED	2	2	2						
INPUT WATTS	26.52	38.84	36.41						
LINE CURRENT:	0.396	0.530	0.490						
POWER FACTOR	0.557	0.609	0.618						
BALLAST FACTOR	0.962	1.013	0.966						
EFFICACY FACTOR	3.627	2.607	2.650						
THD	143.80	121.80	119.60						
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	0 °C ( 32 °F )								
MAX. CASE TEMP	75 °C ( 167 °F )								
ENERGY STAR 4.0	YES								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

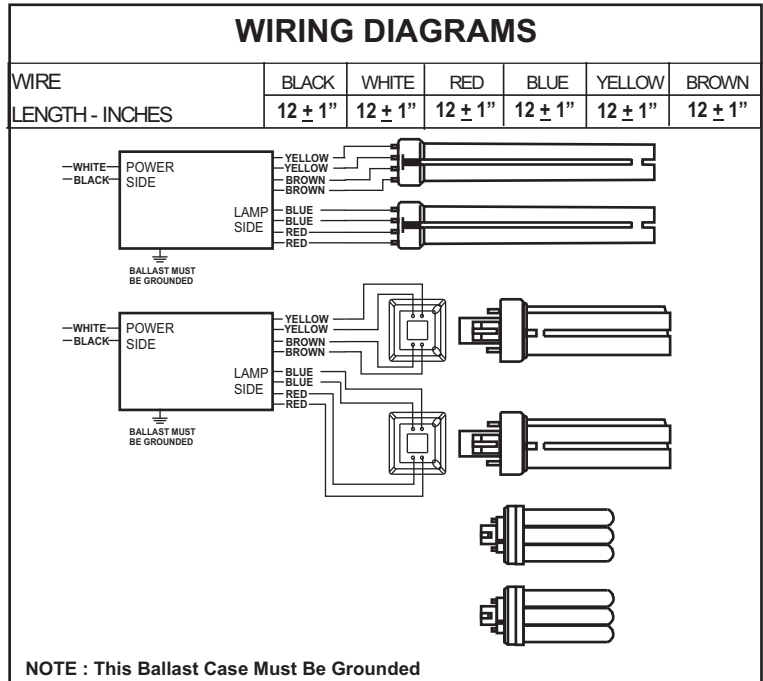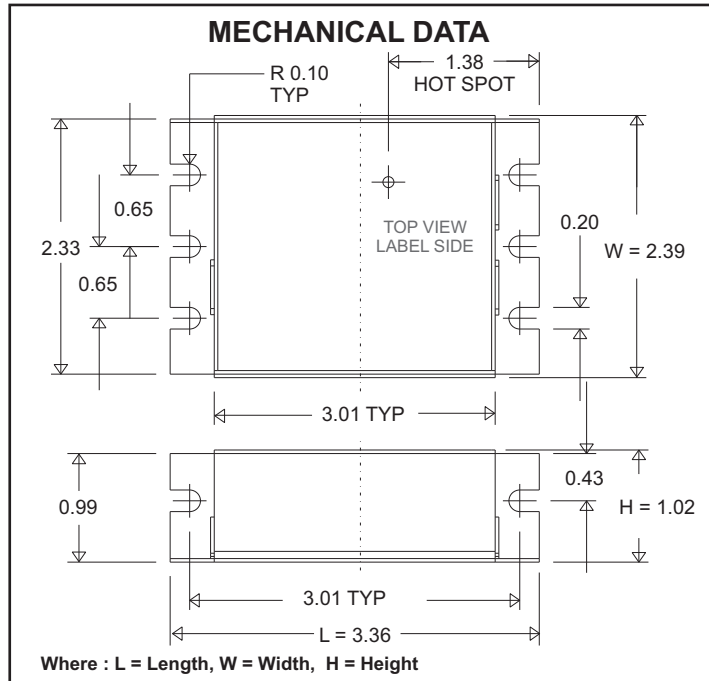

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**