


SPECIFICATION SHEET : NPY-120-240-CR

This Is An Original Product From Fulham Co., Inc

**Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,
* Meets Energy Star 4.0 Criteria For Applications Listed.**

This Ballast Will Operate Following Lamps.




**1 X (CFRT9) 22W + (CFRT9) 32W
1 X (CFRT9) 32W + (CFRT9) 40W**

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	* 22FCRT9	* 32FCRT9	*32FCRT9	*40FCRT9	-	-	-	-	-
LAMPS OPERATED	1		1						
INPUT WATTS	50.63		69.73						
LINE CURRENT:	0.709		0.960						
POWER FACTOR	0.593		0.603						
BALLAST FACTOR	0.937		1.024						
EFFICACY FACTOR	1.850		1.468						
THD	133.00		128.30						
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	"A"								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	-10 °C (14 ° F)								
MAX. CASE TEMP	80 °C (176 ° F)								
ENERGY STAR 4.0	YES								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

MECHANICAL DATA

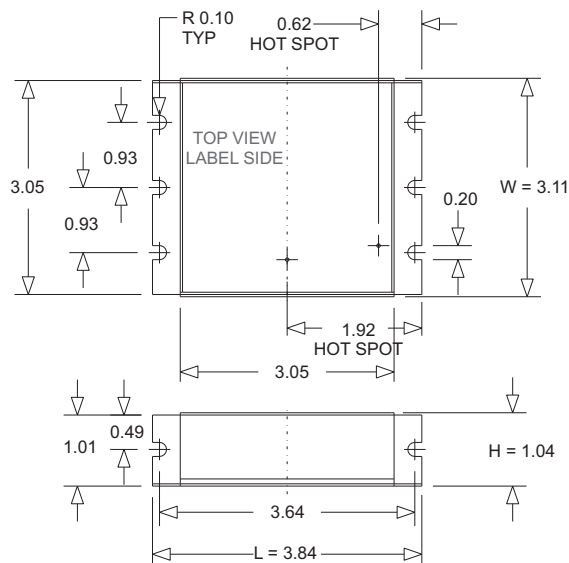


Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE LENGTH - INCHES	BLACK	WHITE	YELLOW/WHITE	YELLOW/WHITE
		18 ± 1"	18 ± 1"	6 ± ½"

(2) LAMP SOCKETS

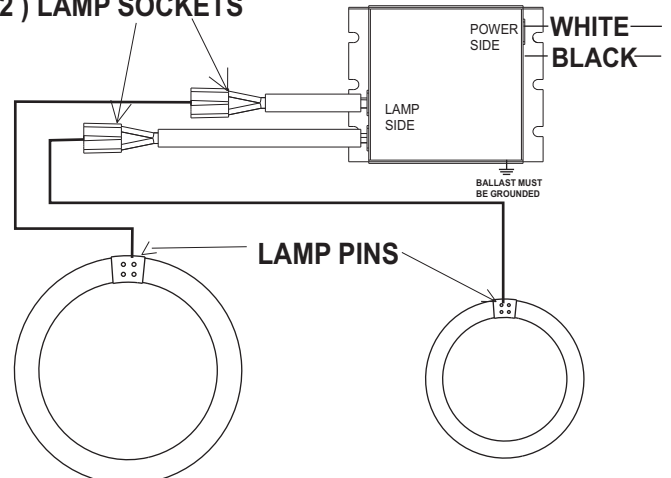

NOTE : This Ballast Case Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.