

PONY Selectable Current (PYCC)



- 7 Models: LAUNCHED and AVAILABLE NOW
- Applications: Indoor - Office
- Class 2 output
- cULus listed, Class P
- Selectable Current, three preset currents per model (50mA intervals)
- 0-10V dimmable from 100%-10%
- Linear form factor with wires
- IP20 rating
- EMI: FCC Title 47 Part 15B
- Input Surge Protection: Line-Neutral 1kV, Line & Neutral-Ground 2kV, RingWave 2.5kV
- Ambient Temperature: -25°C - 50°C
- Warranty: 5 years @ Tc 90°C from the date of manufacture



Part Number	Max Output Power	Input Voltage	Output Voltage Range (VDC)	Selectable Current Range (mA)	0-10V Dimming Range	Typical Efficiency at Max Load	Dimensions (Inches)		
							L	W	H
PYCC-1M1UNV040S-20L	20W	120-277VAC	30~42Vdc (except the 100S-40L model which is 30~40Vdc)	300 / 350 / 400	100-10%	86%	11.02"	1.18"	0.83"
PYCC-1M1UNV055S-30L	30W			450 / 500 / 550					
PYCC-1M1UNV070S-30L	30W			600 / 650 / 700					
PYCC-1M1UNV085S-40L	40W			750 / 800 / 850					
PYCC-1M1UNV100S-40L	40W			900 / 950 / 1000					
PYCC-1M1UNV115S-50L	50W			1050 / 1100 / 1150					
PYCC-1M1UNV130S-60L	60W			1200 / 1250 / 1300					


PONY Selectable Current (PYCC) - MTO



PYCC-1M1UNV040S-20E-AFC

Made to order options: MOQ of 500pcs (special lead time applies)

- With connectors (E)
- With Auxiliary power/dim to off (A)
- With Flicker Free, <4% (F)
- CCT Selectable (C)

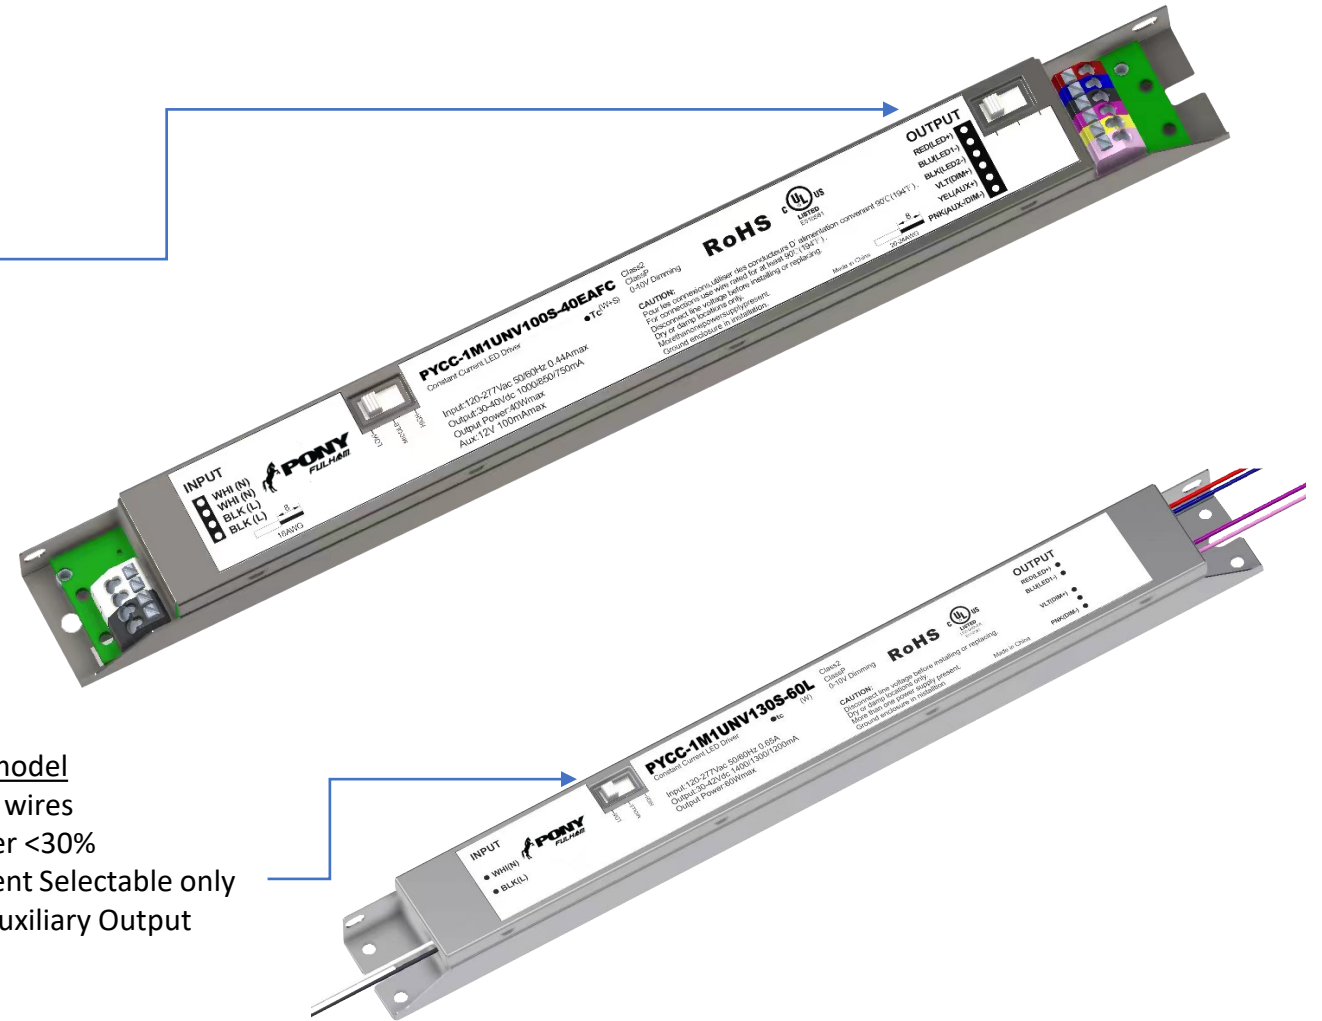

Standard model

- With wires
- Flicker <30%
- Current Selectable only
- No Auxiliary Output



PONY
FULHAM

Locate a North
American OEM
Sales Rep

<https://www.fulham.com/contact-us/find-a-rep/>