




## SPECIFICATION SHEET: SC-120-115-LT8

This Is An Original Product From Fulham Co., Inc

Description: PONY Series, High Frequency Electronic, Rapid Start Ballast,


\* Meets Energy Star 4.0 Criteria For Applications Listed.


This Ballast Will Operate Following Lamps.



## **ELECTRICAL DATA**

INPUT VOLT: 120V ± 10%,	50/60Hz					-				
LAMP WATTS/TYPE	F14T8	F15T8	F14T12	F15T12	-	-	-			-
LAMPS OPERATED			1							
INPUT WATTS	13.49W	14.47W	12.80W	13.81W						
LINE CURRENT:	0.253A	0.266A	0.233A	0.251A						
POWER FACTOR	0.444	0.453	0.459	0.458						
BALLAST FACTOR	1.094	1.007	1.012	0.947						
EFFICACY FACTOR	8.107	6.959	7.905	6.860						
THD	189.5%	189.1%	183.8%	182.8%						
CURRENT CREST FACTOR	1.572	1.557	1.586	1.534				•		
EMI/RFI COMPLIANCE	FCC PART 18-A (Consumer)									
SOUND RATING	" A "									
BALLAST TYPE	RAPID START									
VOLTAGE TRANSIENTS	ANSI 62.41									
INPUT/PROTECTION	FUSE									
OUTPUT/PROTECTION	NONE									
MIN. OPERATING TEMP	-10°C (14°F )									
MAX. CASE TEMP	75 °C ( 167 ° F )									
ENERGY STAR 4.0										
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR									

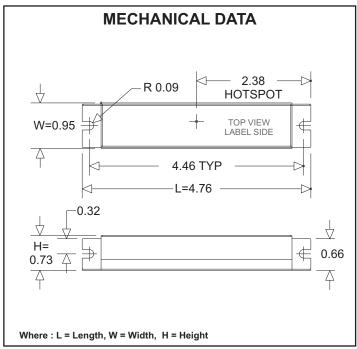

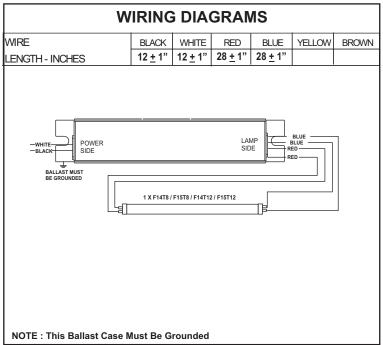

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of <u>2 years</u> from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR <u>call Customer Service at 1-323-599-5000</u>.

DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED.