

SPECIFICATION SHEET : SC-120-118-CFL


This Is An Original Product From Fulham Co., Inc

**Description : PONY Series, High Frequency Electronic, Rapid Start Ballast,
* Meets Energy Star 4.0 Criteria For Applications Listed.**

This Ballast Will Operate Following Lamps.



**QUAD (CFQ/E), 4 PIN
18W**




**TRIPLE(CFTR/E), 4 PIN
18W**

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%, 50/60HZ									
LAMP WATTS/TYPE	18CFQ/E	18CFTR/E	-	-	-	-	-	-	-
LAMPS OPERATED	1	1							
INPUT WATTS	21.88	20.81							
LINE CURRENT:	0.314	0.304							
POWER FACTOR	0.579	0.570							
BALLAST FACTOR	1.065	1.056							
EFFICACY FACTOR	4.868	5.076							
THD	135.20	136.70							
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-B (Consumer)								
SOUND RATING	"A"								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUZE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	0 °C (32 °F)								
MAX. CASE TEMP	75 °C (167 °F)								
ENERGY STAR 4.0	-								
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OUTDOOR								


MECHANICAL DATA

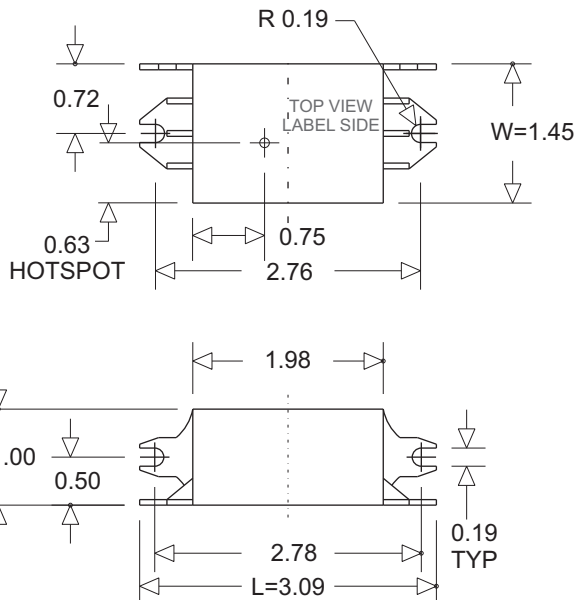

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	12 ± 1"	12 ± 1"	12 ± 1"	12 ± 1"		

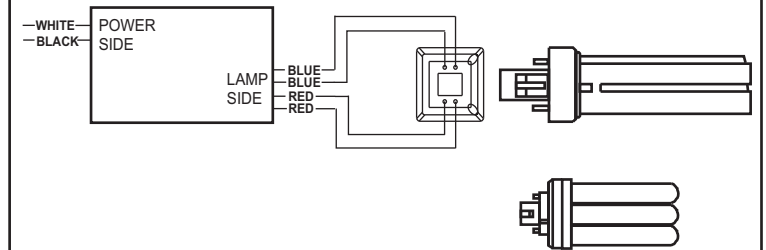

NOTE : This Plastic Case Ballast Does Not Require Grounding

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.