


SPECIFICATION SHEET : SC-120-208-LT5

This Is An Original Product From Fulham Co., Inc

Description : PONY Series, High Frequency Electronic, Rapid Start Ballast.

This Ballast Will Operate Following Lamps.




F6T5, F8T5, F13T5, F14T5

ELECTRICAL DATA


INPUT VOLT: 120V ± 10%, 50/60Hz									
LAMP WATTS/TYPE	F13T5	F14T5	F6T5 + F8T5		F6T5	F8T5	-	-	
LAMPS OPERATED	1			2					
INPUT WATTS	15.92	15.74	15.64		14.63	16.94			
LINE CURRENT:	0.240	0.237	0.236		0.224	0.252			
POWER FACTOR	0.552	0.552	0.552		0.545	0.559			
BALLAST FACTOR	1.096	0.995	1.047	0.943	1.102	0.936			
EFFICACY FACTOR	6.885	6.320	6.693	6.029	7.529	5.525			
THD	131.3%	131.5%	131.8%		135.0%	128.1%			
CURRENT CREST FACTOR	< 1.7								
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)								
SOUND RATING	" A "								
BALLAST TYPE	RAPID START								
VOLTAGE TRANSIENTS	ANSI 62.41								
INPUT/PROTECTION	FUSE								
OUTPUT/PROTECTION	EOL								
MIN. OPERATING TEMP	0 °C (32 °F)								
MAX. CASE TEMP	75 °C (167 °F)								
ENERGY STAR 4.0	-								
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR								

MECHANICAL DATA

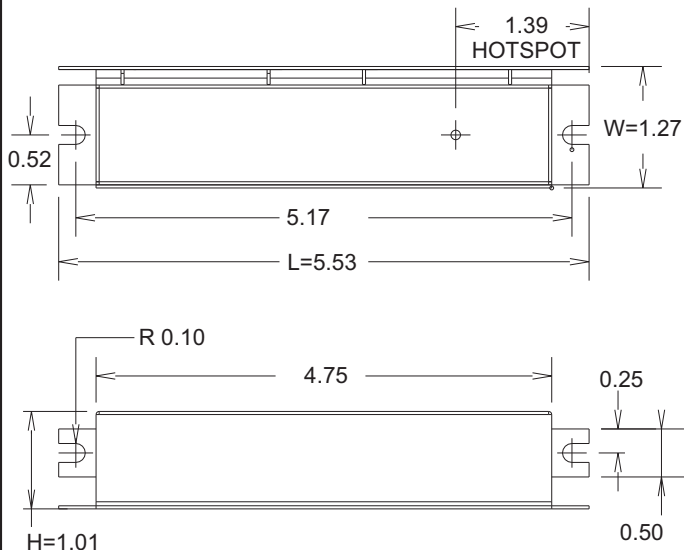

Where : L = Length, W = Width, H = Height

WIRING DIAGRAMS

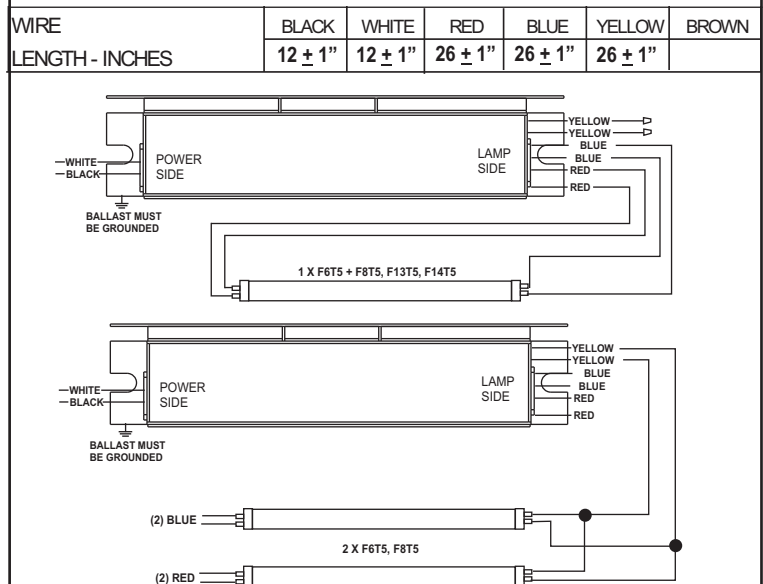

NOTE : This Ballast Case Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 2 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.