


TECHNICAL DATA SHEET: ELECTRONIC BALLAST

Project : STANDARD : COMMERCIAL Type

Model No : HSC-240-124-UT5-OAE Remark:

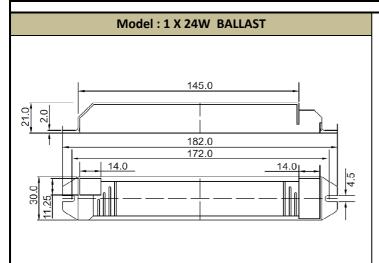

Input Characteri		istics
1	Voltage (Un)	240 Vac
2	Operating Voltage Range	140 ~ 277 Vac
3	Frequency (Hz)	50 / 60 Hz
4	Current (A)	0.11 A
5	Wattage (W)	26W
6	Power Factor (PF)	> 0.97 (PPFC)
7	Current Harmonics (Athd)	< 30%
8	Over Current Protection	Yes
9	Surge Withstanding Capacity	Yes
10	Over Voltage Application	@ 320Vac 48Hrs &

Output Characteristics		
1	Lamp Types	F24-T5
2	Number of Lamps	1
3	Lamp Connection	Single
4	Lamp Current	0.295A
5	Operating Frequency	≥ 40 KHz
6	Ignition Method	RS
Ballast Characteristics		
1	Lamp Current Crest Factor (CCF)	<u><</u> 1.75
2	Ballast Efficiency (BE)	<u>></u> 84%

inp Types	24-10
umber of Lamps	1
mp Connection	Single
mp Current	0.295A
perating Frequency	≥ 40 KHz
nition Method	RS
Ballast Characteristics	
mp Current Crest Factor (CCF)	<u><</u> 1.75
allast Efficiency (BE)	<u>></u> 84%

2 Restart or Latching		Latching
Environmental Operating Details		
1	Minimum Lamp Starting Temperature	0°C

Protection Features

Deactivated Lamp

Max. Ambient Temperature

Max. Case Temperature (Tc)

Ordering Information			
Sr	Model Number	Description	Case Lot
1	HSC-240-124-UT5-OAE	1x24W T5 < 30% THD	50

	Mechanical Details		
	1 Weight	80 gm	
Sec.	2 Case Dimensions		
	Length W/Mount	182 mm	
STATE OF THE PARTY	Center to Center (CTC)	172 mm	
	Width	30 mm	
	Height	21 mm	
	3 Case Material	ABS Box	
	4 Wiring Diagram	On Screen	
	5 Input / Output Connections	Connectors Screw Type	
	6 Wires Length & Colors		
_	Input (White & Black)	N/A	
	Output (White)	N/A	
	Output (Gray)	N/A	
	7 Potting	N/A	

Notes

A High power factor Electronic ballast specially designed for heavy duty use .

Key features :-

- Compact Design
- High Voltage withstanding capacity.
- High Surge withstanding capacity
- Long Life.
- High Durability
- Lamp will not Shut down @ high Voltage
- Automatic restart after lamp replacement

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 1 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog

Yes

50°C

65°C

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

DOC NUMBER :-FULTDS011

Date :-13.09.2013