


TECHNICAL DATA SHEET: ELECTRONIC BALLAST

Project : STANDARD Type : ECONOMIC

Model No : HSC-240-136-HT8-OAA Remark :

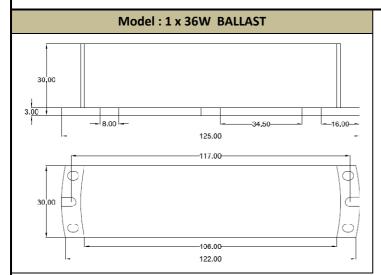

Input Characteristics		
1	Voltage (Un)	240 Vac
2	Operating Voltage Range	140 ~ 277 Vac
3	Frequency (Hz)	50 / 60 Hz
4	Current (A)	0.16 A
5	Wattage (W)	36W
6	Power Factor (PF)	> 0.94 (PPFC)
7	Current Harmonics (Athd)	< 35%
8	Over Current Protection	Yes
9	Surge Withstanding Capacity	Yes
10	Over Voltage Application	@ 320Vac 48Hrs & @ 360Vac 2Hrs

Mechanical Details

Output Characteristics			
1	Lamp Types	36W-T8-FTL 40W-T12-FTL 36W-PLL	
2	Number of Lamps	1	
3	Lamp Connection	Single	
4	Lamp Current	0.320A	
5	Operating Frequency	<u>></u> 40KHz	
6	Ignition Method	RS	
Ballast Characteristics			
1	Lamp Current Crest Factor (CCF)	≤1.90	
2	Ballast Efficiency (BE)	<u>≥</u> 86%	

	Wiceflathear Betails		
	1 Weight	70 gm	
2	2 Case Dimensions		
	Length W/Mount	125 mm	
	Center to Center (CTC)	117 mm	
3	Width	30 mm	
1	Height	30 mm	
	3 Case Material	ABS	
4	4 Wiring Diagram	On Screen	
	5 Input / Output Connections	Wires	
(6 Wires Length & Colors		
	Input (White & Black)	180 mm	
	Output (White)	715 mm	
	Output (Gray)	915 mm	
-	7 Potting	N/A	

2	Restart or Latching	N/A	
Environmental Operating Details			
1	Minimum Lamp Starting Temperature	0°C	

Protection Features

Deactivated Lamp

Environmental Operating Details			
1	Minimum Lamp Starting Temperature	0°C	
2	Max. Ambient Temperature	50°C	
3	Max. Case Temperature (Tc)	65°C	

Ordering Information			
Sr No	Model Number	Description	Case Lot
1		1x36W T8 <35% THD 1x40W T12 <35% THD 1x36W PLL <35% THD	180

Notes

A High power factor Electronic ballast specially designed for heavy duty use.

Key features :-

- Compact Design
- Best replacement for magnetic ballast with lower losses.
- High Voltage withstanding capacity
- High Surge withstanding capacity
- Long Life
- High Durability
- Plastic body (No Earthing Required)
- Economical
- Lamp will not Shut down @ high Voltage

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 1 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)

NO

Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

DOC NUMBER :- FULTDS004

REV :-1.2 Date:- 01.04.2013