



TECHNICAL DATA SHEET : ELECTRONIC BALLAST

Project : STANDARD

Type : PROFESSIONAL

Model No : HPY-240-136-LT8-OAE

Remark :

Model : 1 x 36W BALLAST



Input Characteristics

1	Voltage (Un)	240 Vac
2	Operating Voltage Range	140 ~ 277 Vac
3	Frequency (Hz)	50 / 60 Hz
4	Current (A)	0.16 A
5	Wattage (W)	36 W
6	Power Factor (PF)	> 0.97 (PPFC)
7	Current Harmonics (Athd)	< 20%
8	Over Current Protection	Yes
9	Surge Withstanding Capacity	Yes
10	Over Voltage Application	@ 320Vac 48Hrs & @ 360Vac 2 Hrs

Output Characteristics

1	Lamp Types	36W-T8-FTL 40W-T12-FTL 36W-PLL
2	Number of Lamps	1
3	Lamp Connection	Single
4	Lamp Current	0.320A
5	Operating Frequency	≥ 40KHz
6	Ignition Method	RS

Ballast Characteristics


1	Lamp Current Crest Factor (CCF)	≤ 1.75
2	Ballast Efficiency (BE)	≥ 86%

Protection Features

1	Deactivated Lamp	Yes
2	Restart or Latching	Latching

Mechanical Details

1	Weight	120 gm
2	Case Dimensions	
	Length W/Mount	220 mm
	Center to Center (CTC)	210 mm
	Width	24 mm
	Height	31 mm
3	Case Material	Metal Case
4	Wiring Diagram	On Screen
5	Input / Output Connections	Connectors, Push Type
6	Wires Length & Colors	
	Input (White & Black)	N/A
	Output (White)	N/A
	Output (Gray)	N/A
7	Potting	N/A

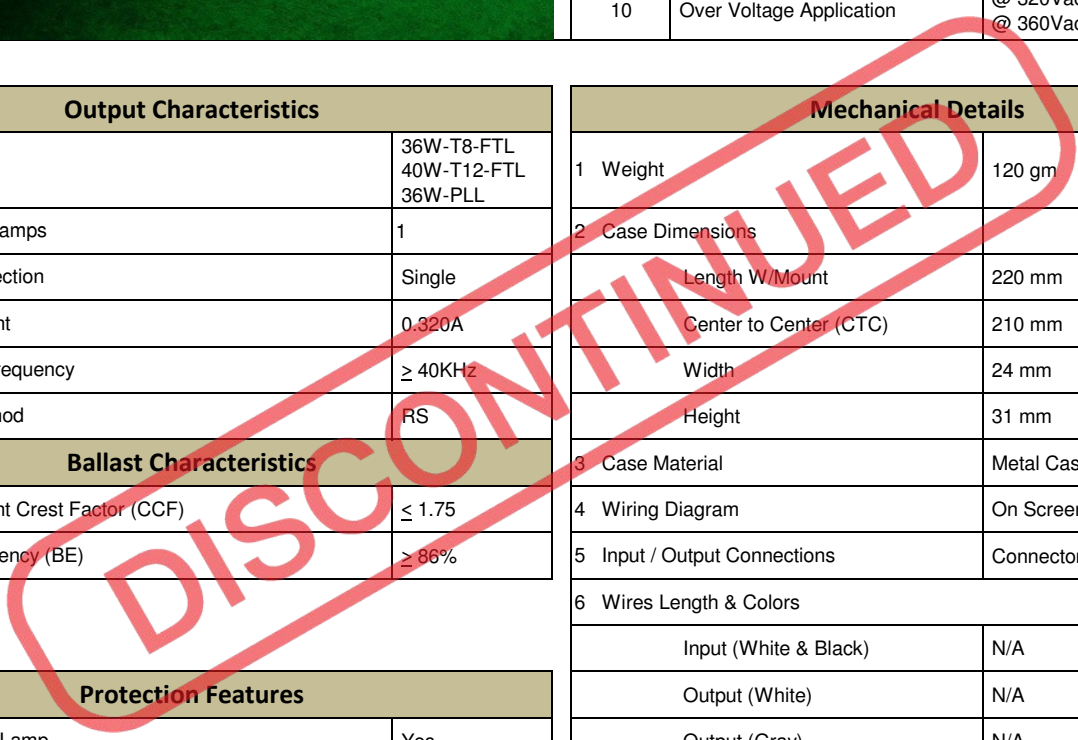

Environmental Operating Details

1	Minimum Lamp Starting Temperature	0°C
2	Max. Ambient Temperature	50°C
3	Max. Case Temperature (Tc)	70°C

Ordering Information

Sr No	Model Number	Description	Case Lot
1	HPY-240-136-LT8-OAE	1x36W T8 <20%,THD 1x40W T12 <20%,THD 1x36W PLL <20%,THD	50

Notes

A High power factor Electronic ballast specially designed for heavy duty use.

Key features :-

- Compact Design
- High Voltage withstanding capacity
- High Surge withstanding capacity
- Long Life
- High Durability
- Lamp will not Shut down @ high Voltage
- Automatic restart after lamp replacement.