



SPECIFICATION SHEET: SNS-120-3648-IS

This Is An Original Product From Fulham Co., Inc


Description: Sinehorse Series, High Frequency Electronic, Drop In Replacement for Magnetic, Parallel Wiring, Indoor and Outdoor Sign Applications


This Ballast Will Operate Following Lamps.

Fluorescent Lamp Ballast for any 3,4,5 or 6 lamp combination of 800mA T12HO lamps. NO single lamp may be longer than 8 feet.

ELECTRICAL DATA (120V APPLICATION)

INPUT VOLT: 120V ± 10%, 50/60Hz										
LAMP WATTS/TYPE	F96T12HO	F96T12HO	F96T12HO	F96T12HO			-		-	-
LAMPS OPERATED	3	4	5	6						
INPUT POWER (W)	241	302	350	404						
LINE CURRENT (A)	2.02	2.53	2.92	3.34						
POWER FACTOR	> 0.9									
THD	< 10 %									
CURRENT CREST FACTOR	< 1.7									
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)									
SOUND RATING	"A"									
BALLAST TYPE	INSTANT START									
VOLTAGE TRANSIENTS	-									
INPUT/PROTECTION	FUSE									
OUTPUT/PROTECTION	DEACTIVATED LAMP PROTECTION									
MIN. OPERATING TEMP	-30 °C (-22 °F)									
MAX. CASE TEMP	70 °C (158 °F)									
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 2 OUTDOOR									

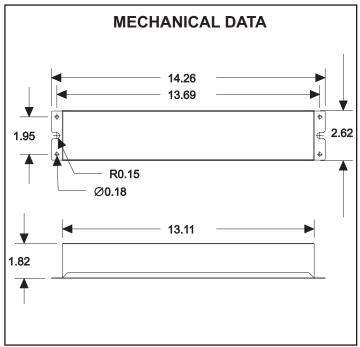

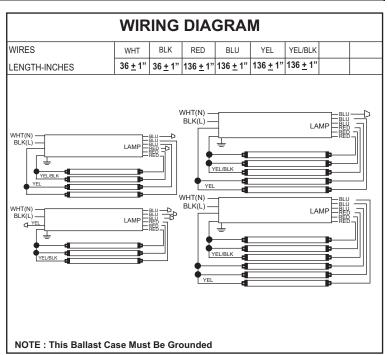

Fulham Co., Inc extends limited warranty only to the original purchaser or to the first user for the period of 4 years from the date of manufacture as indicated by the date code stamped on each product and when properly installed and under normal conditions of use. For additional warranty guide line, please refer to our Complete Product Catalog OR call Customer Service at 1-323-599-5000., To order this product, Fax to 323-754-9060 OR email to order@fulham.com DUE TO A PROGRAM OF CONTINUOUS IMPROVEMENT, FULHAM Co., INC RESERVES THE RIGHT TO MAKE ANY VARIATION IN DESIGN OR CONSTRUCTION TO THE EQUIPMENT DESCRIBED. Address: 12705 South Van Ness Ave., Hawthorne, CA 90250 Tel.: 1-323-599-5000, Fax.: 1-323-754-9060. Website: www.fulham.com