

TM64RD05XX-2X1, TM80RD05XX-2X1

Constant Current LED Round Module


- High Density, high brightness chip array for use in Class 2 circular applications
- Constant current for maximum efficacy
- Available in standard CCT's
- Dimmable when used with a dimmable driver
- Suitable for DLC and Energy Star compliant luminaires
- 80 CRI standard and 90 CRI available

General Ratings

Max Lumen Output @ Max Current	TM64: 3700 lumens; TM80: 4000 lumens @ 4000K / 80 CRI*
Max Current Input	1050 mA
Nominal DC Power Consumption @ Max Current	TM64: 26.5W; TM80: 33W
Nominal Operating Voltage @ Max Current	TM64: 25.2VDC; TM80: 31.5VDC
Beam Angle	120°
CRI	80, 90
Operating Ambient Temperature Range (Ta)	-35 to +40°C / -31 to +104°F
Maximum Module Case Temperature (Tc)	+90°C
Estimated Lumen Maintenance (L70)	>50,000 hours at max Tc
Color Consistency	Binning per ANSI C78.377-2008; 7 SDCM
Overall Size	9" diameter x 0.22" H
Material / Weight	FR4 / 152g
Maximum Screw Installation Torque	35 inch - lbs
Safety/Compliance	cULus (File # E351548, PTL123X20www**) Class 2 Lighting System RoHS Compliant
Warranty	5 years with suitable Fulham LED Drivers

* At Tc mod = 25°C

** www = PCB Rev #

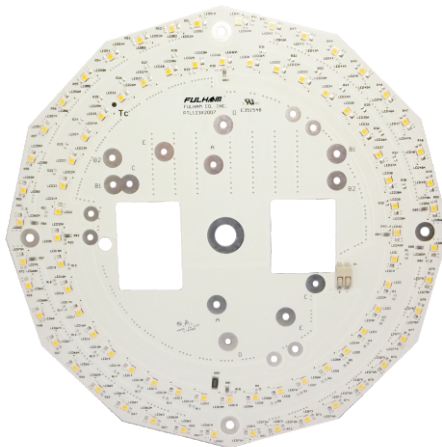



TM64RD05XX-2X1, TM80RD05XX-2X1

Part Numbering Matrix

TM 64 RD 05 40 - 2 0 1 C

Module Rated Power

64* = 26.5W
80* = 33.0W

Color Temperature

27 = 2700K
30* = 3000K
35 = 3500K
40* = 4000K
50 = 5000K

CRI

0* = 80
1 = 90

Module Options

Blank* = Standard
C = Conformal Coating

* Indicates standard module options. All others are built to order

Electrical Specifications^{1,2,3}

LED Module Part Number	Number of LED	Input Current	Abs. Max Forward Voltage	Nom. Forward Voltage	Nom. Rated Power
TM64RD05xx-2x1	64	350mA	27 VDC***	22.2 VDC	7.8W
		500mA	28 VDC***	23.2 VDC	11.6W
		700mA	29 VDC***	24.2 VDC	17.0W
		1050mA**	30 VDC***	25.2 VDC	26.5W
TM80RD05xx-2x1	80	350mA	34 VDC***	27.8 VDC	9.7W
		500mA	35 VDC***	29.0 VDC	14.5W
		700mA	36 VDC***	30.2 VDC	21.1W
		1050mA**	37 VDC***	31.5 VDC	33.0W

** Indicates maximum rated current. Modules may be operated at a current less than or equal to this value. Reference Current vs. Rel. Lum. Flux Table to calculate estimate lumen output at lesser currents.

*** Absolute maximum forward voltage was not used in calculating nominal rated power. Data is provided to assist in selecting proper LED driver.

Optical Specifications^{1,2,3}

LED Module Part Number	Color Temperature	Module Drive Current	Nominal Luminous Flux @ 90CRI	Nominal Luminous Flux @ 80CRI	Efficacy @ 80CRI
TM64RD0530-2x1	3000K	1050mA	2225 lumens	2975 lumens	112lm/W
TM64RD0540-2x1	4000K	1050mA	2400 lumens	3200 lumens	121lm/W
TM80RD0530-2x1	3000K	1050mA	2800 lumens	3700 lumens	112lm/W
TM80RD0540-2x1	4000K	1050mA	3000 lumens	4000 lumens	121lm/W

Current vs Relative Luminous Flux Table

Forward Current	Lumen Multiplier
1050	1
700	0.72
500	0.50
350	0.38


1) Electrical and optical specifications are based on Tc mod = 25°C. Reference Amb. Temp. vs Rel. Lum. Flux for other temperatures.

2) Standard lumen output and efficacy is calculated for standard options. Reference CCT vs Rel. Lum. Flux chart for lumen ratio calculation.

3) Specifications are subject to change without notice.

Thermal Specifications

	LED Module
Storage Temperature Range	-35 to 100°C
Operating Ambient Temperature Range	-35 to 40°C
Maximum Case Temperature (Tc mod)	90°C




Tc located on module



TM64RD05XX-2X1, TM80RD05XX-2X1

Mechanical Drawings

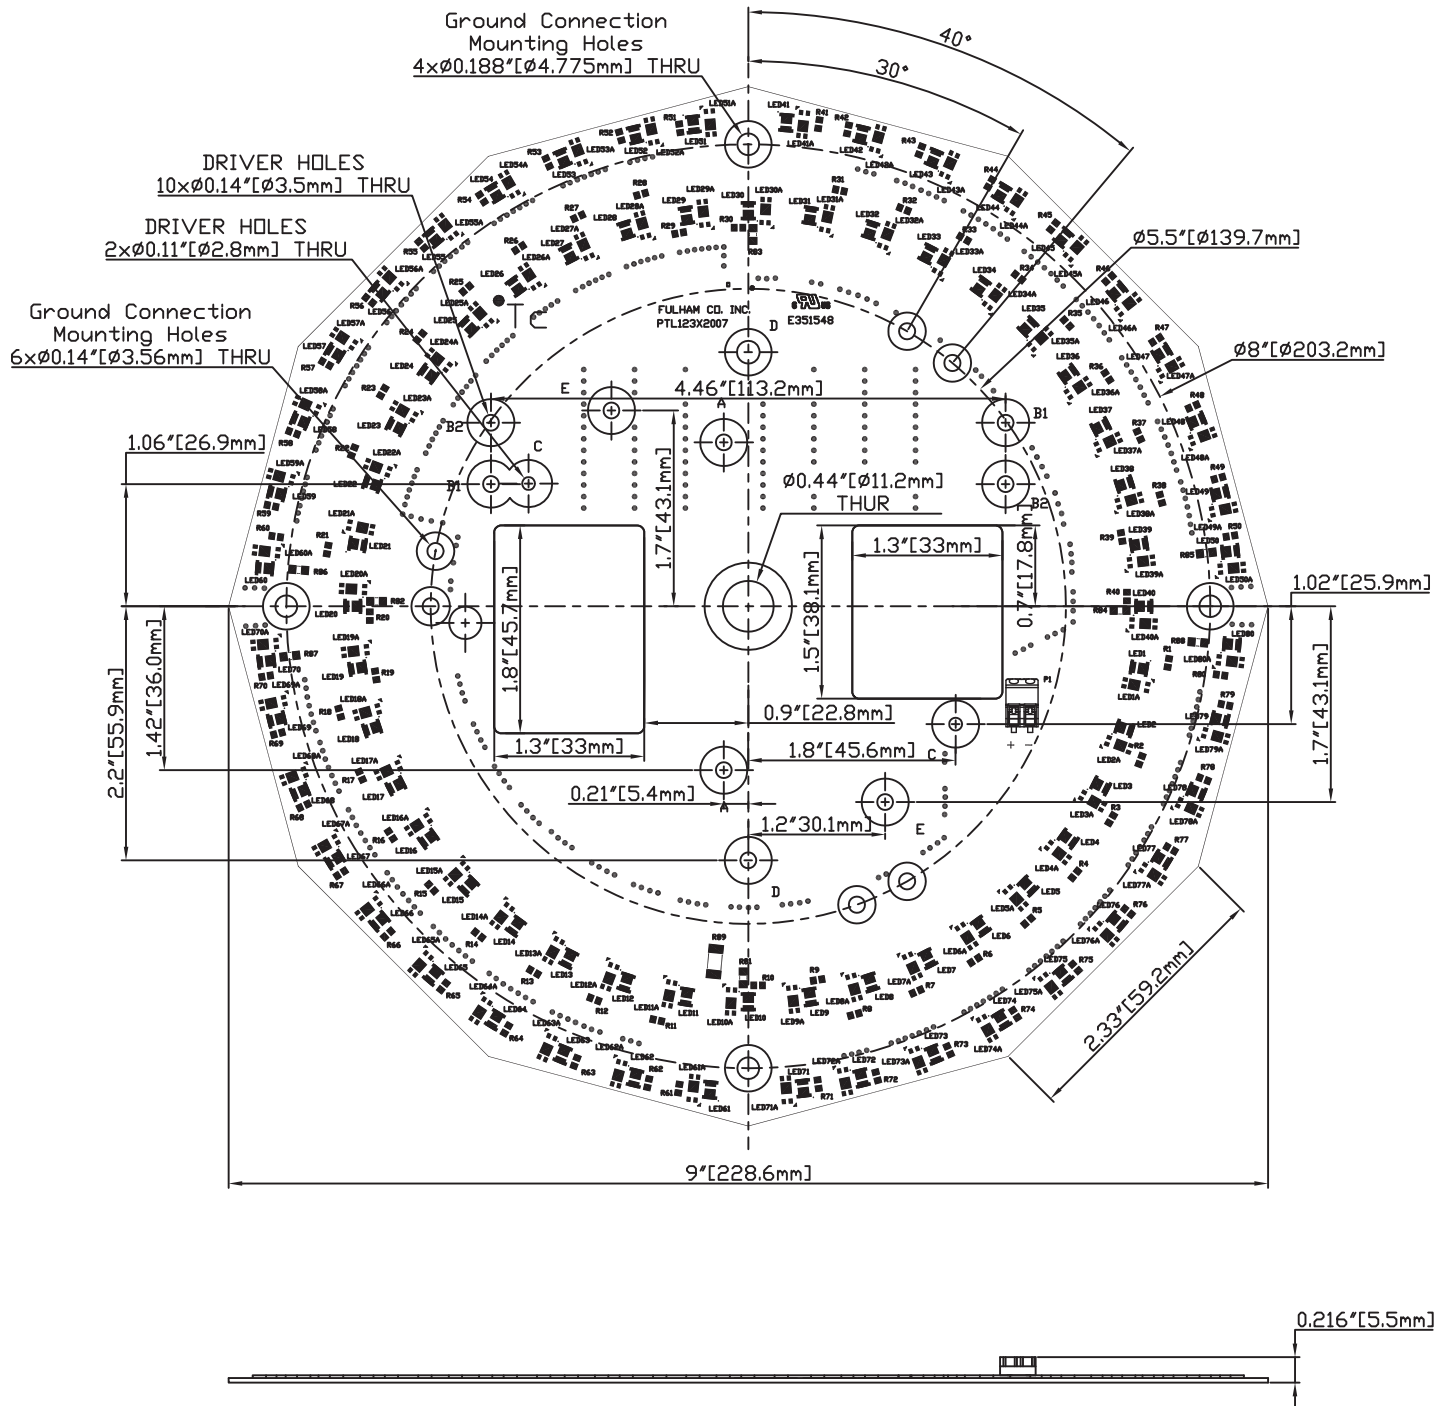




TM64RD05XX-2X1, TM80RD05XX-2X1

Termination Notes

- If connectors are used, use solid wire size 24 – 18 AWG, rated at a minimum 50V, minimum 105°C, and stripped to length between 6-7 mm (0.24-0.28 inches).
- Push button for insertion of conductor and for easy removal of wires.



Fastening Notes

- If fastening by screw hole, use any screw with diameter less than 0.185 in (4.7mm). Use all available screw holes to ensure good contact between back side of module and mounting surface. Refer to max specified torque for installation. Suggested screw sizes: #6 or M4 Pan Head screw.
- If fastening using double-sided tape, start with clean, dust-free surface. Peel backing and place LED module on mounting surface. Firmly press down on the module to ensure good adherence. Follow the double-side tape manufacturer's installation instructions.

Environmental Rating

- Modules are rated for dry locations, unless option for conformal coating is requested.
- Conformal coating is acrylic based and rated for Environment and Moisture Protection per IPC-CC-830.

Electrostatic Sensitive Product (ESD)

- Fulham LED products should be handled with proper measures to protect against any potential ESD damage.
- When servicing, personnel should be ground and direct contact with LED should be avoided.

Thermal Management

- Proper thermal management should be employed to ensure life and reliability of product.
- Use of thermal grease, paste, pad, or other material interface is highly recommended.


Polarity Notes

- Modules are polarity sensitive.
- Ensure that “positive” from LED Driver is connected to “positive” of LED modules and that “negative” from LED Driver is connected to “negative” of LED modules.
- Polarities of modules are marked with “+” for positive and “-” for negative.




TM64RD05XX-2X1, TM80RD05XX-2X1

Color and Binning

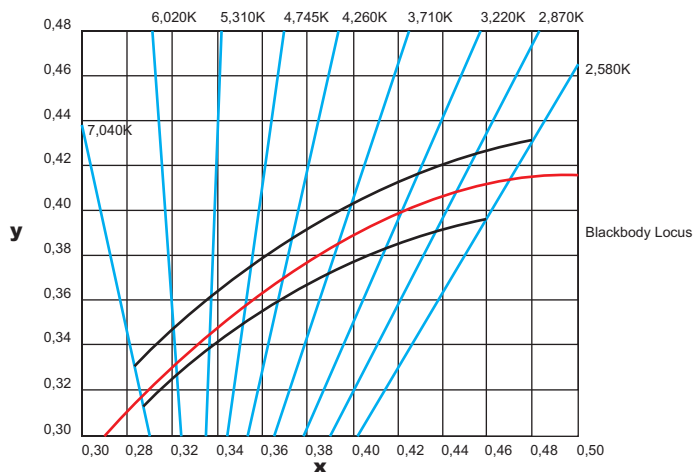

Ref. Nichia
Chromaticity Diagram for ANSI bins
For reference only. For more detailed info, contact factory.

Optical Spectrum***

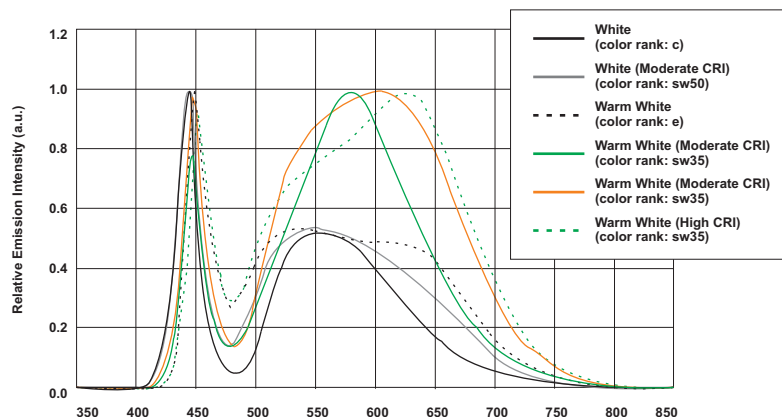

*** Value varies depending on product type and color rank
Ref. Nichia
LED Catalogue 2013
For reference only. For more detailed info, contact factory.

Thermal De-Rating

Ambient Temperature (Ta)	Relative Luminous Flux
25°C	1
30°C	0.991
35°C	0.989
40°C	0.980
45°C	0.975
50°C	0.970
55°C	0.960
60°C	0.950

Ref. Nichia
LED757 Spec Sheet
For reference only. For more detailed info, contact factory.

CCT vs Luminous Flux

CCT	Relative Luminous Flux
2700K	0.87
3000K	0.93
3500K	0.96
4000K	1.00
5000K	1.07



TM64RD05XX-2X1, TM80RD05XX-2X1

Compatible Fulham LED Drivers

Fulham Part Number	Driver Description	# of Modules/Driver*, Wiring Diagram	
		TM64	TM80
TCD11200650-18C	650 mA, 18W CC Driver, 120V AC Input, Triac Dimmable	1, A	0
TC11200700-18C	700 mA, 18W CC Driver, 120V AC Input	1, A	0
T1T11200700-18C	700 mA, 18W CC Driver, 120V AC Input, Triac Dimmable	1, A	0
T1(M1)UNV0700-28C	700 mA, 28W CC Driver, Universal Input (0-10V Dimmable)	1, A	1, A
T1M13470700-28C	700 mA, 28W CC Driver, 347V Input, 0-10V Dimmable	1, A	1, A
T1UNV0700-36C	700 mA, 33W CC Driver, Universal Input	1, A	1, A
T1(M1)UNV0700-40C	700 mA, 40W CC Driver, Universal Input (0-10V Dimmable)	2, B	1, A
T1M13470700-40C	700 mA, 40W CC Driver, 347V Input, 0-10V Dimmable	2, B	1, A
T1(M1)UNV1050-42C	1050 mA, 42W CC Driver, Universal Input (0-10V Dimmable)	1, A	1, A
T1M2UNV0700-49L	700 mA, 49W CC Driver, Universal Input, 2 output channels, 0-10V Dimmable	2(1/Ch), C	2(1/Ch), C
T1M1UNV1400-60L	1400 mA, 60W CC Driver, Universal Input, 0-10V Dimmable	2, B	2, B
FHS2-UNV-36L	HotSpot2 at 350 - 700 mA output.		

NOTE:

1. Subject to rated loading conditions.
2. Modules are polarity sensitive. Ensure that "positive" from LED Driver is connected to "positive" of LED modules and that "negative" from LED Driver is connected to "negative" of LED modules.
3. List is subject to change without notice.

Wiring Diagram

