

WH22-120-L

Instant Start Fluorescent Ballast

- Solid State Electronic Ballast
- Instant Start
- Input Voltage: 120VAC, 60Hz
- cUL Listed, Class "P", 1 or 2 Outdoor


General Specifications

Input Voltage	120VAC ±10%, 60Hz
Power Factor	>0.9
THD	<30%
Current Crest Factor	<2.1
EMI / RFI Compliance	FCC Part 18-A
Sound Rating	"A"
Ballast Type	Instant Start
Voltage Transients	ANSI C82.11 - 1993
Input Protection	Fuse
Min. Operating Temp	-30°C (-20°F)
Max. Case Temp	70°C (158°F)
Approvals Class	cUL Listed, Class "P", 1 or 2 Outdoor
Warranty	5 Years from the date of manufacture when properly installed

Electrical Data

Lamp Wattage / Type	Lamps Operated	Input Wattage	Line Current	Ballast Factor	Efficacy Factor
F15T8	2	26	0.23	0.9	3.2
CFT13W	2	25	0.22	0.9	3.5
CFT24W	1	25	0.22	1.0	4.0
CFM24/27W	1	24	0.21	0.9	3.9
F25T12	1	28	0.25	1.1	3.9
CFQ26W	1	24	0.21	1.0	4.3
CFT36/39W	1	32	0.28	0.8	2.6

Mechanical Data

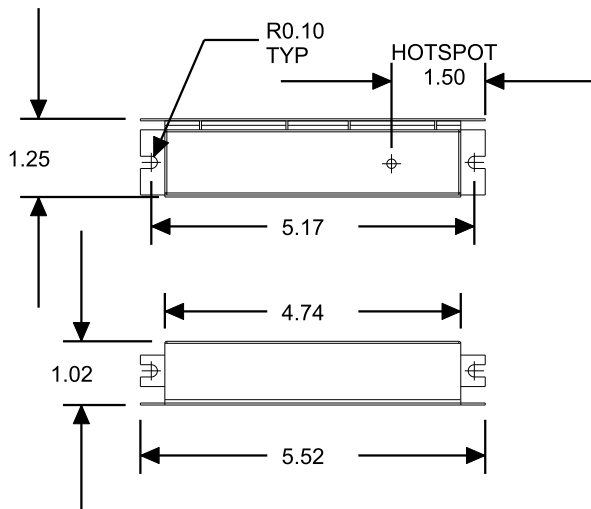

Wiring Diagrams

Wire Color	Length (Inches)
Black	18" ±1"
White	18" ±1"
Red	36" ±1"
Yellow	36" ±1"

Wiring configurations vary depending on the lamp type. Please refer to Fulham's Wiring Diagram Finder in the link below:

<https://www.fulham.com/contact-us/wiring-diagrams/>

Where : L = Length, W = Width, H = Height