

- Constant Current LED Driver
- Output Wattage: 48W
- Input Voltage : 240±15%, 50/60Hz
- Output Current: 800mA ±8%
- Wired; ALU Enclosure
- Output voltage range of 40-60VDC
- Suitable for Dry and Damp Location
- Under Voltage Protection
- Over Voltage Protection
- 440Vac Protection

### General Specifications

Rated Input Voltage	240VAC ±15%, 50/60Hz
Operating Input Voltage Range	110VAC~320VAC, 50/60Hz
Input Current	0.28 A Max .
Input Power	56W Max @ 240VAC.
Power Factor	0.98
THD	<10% across load range specified
Efficiency	>86% across load range specified
Driver Type	Constant Current
Output Current	800mA ±8%
Output Voltage Range	40-60VDC
Output Power	48W
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	NA
RFI/EMI	NA
Output Type	Class II (IEC 61140)
Ambient Operating Temperature Range	-10°C to 50°C
Max. Case Temperature	75°C
Sound Rating	NA
Input Surge Protection	Line-Neutral 4kV
Protections	Input Over Current : NON-Resettable
	Input Over Voltage : CUTOFF @ Vin>325Vac; AUTORECOVERY @ Vin = 300-315VAC : Immunity - 320Vac for 48 hours & 440Vac for 8 hours
	Input Under Voltage : CUTOFF @ Vin <95VAC; AUTORECOVERY @ Vin = 100-110VAC
	Output Short Circuit : Auto recovery
	Output Open Circuit : Auto recovery
	Output to ground short : YES
	Output Overload : YES
Over Temperature : NA	
Service Life	50,000 hours @ Tc Max
Approvals / Class	Dry and Damp Locations
Warranty	3 years
Weight	0.500Kg

Note : The usage of a compatible SPD is mandatory for outdoor application.  
Recommended Fulham SPD - SPD1230S5A5K54

Figure 1

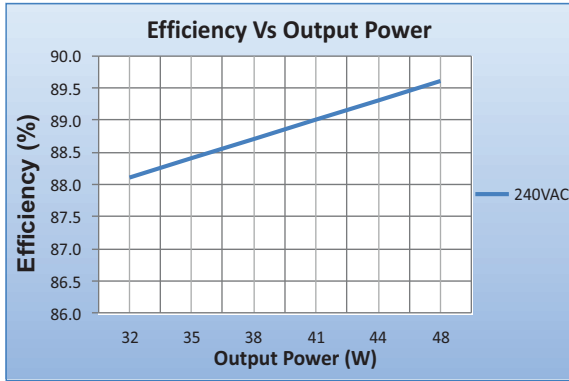


Figure 2

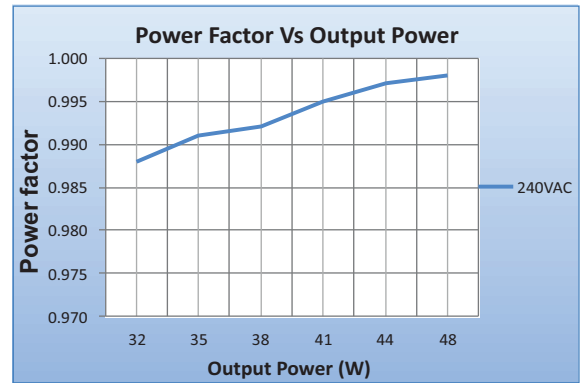


Figure 3

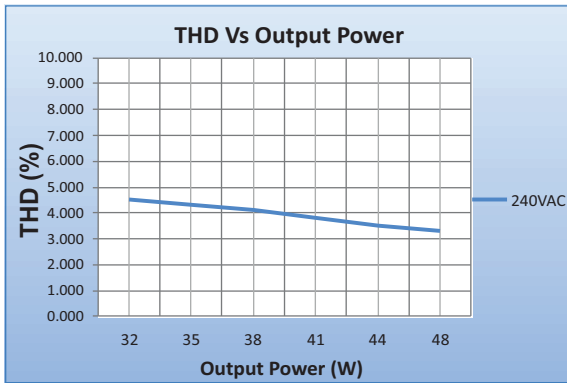


Figure 4



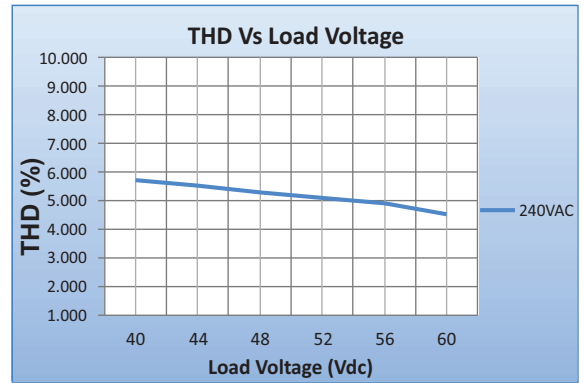


Figure 5

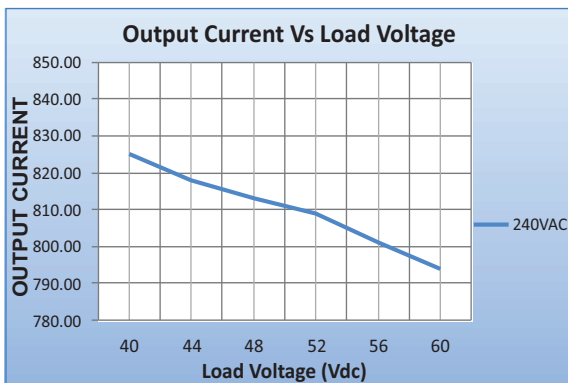


**Mechanical Data**

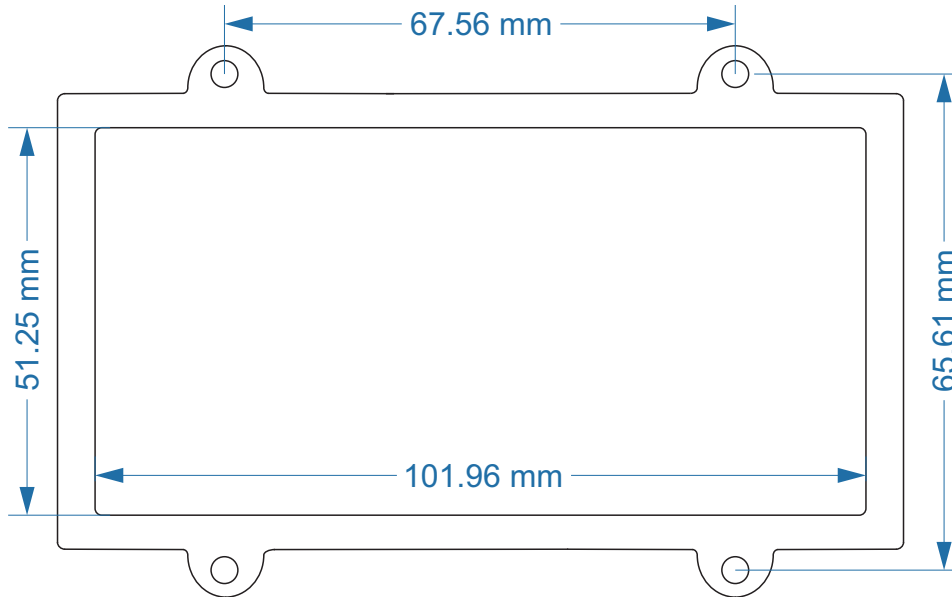

Note : All Dimensions are in mm.

Tolerance=±0.5mm

**Wiring Diagrams**

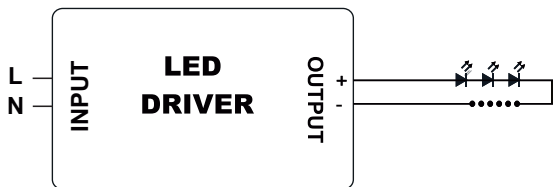

INPUT SIDE	LENGTH
BLACK	3 Core Cable 350mm (Brass Lug on Green wire)
WHITE	
GREEN	

OUTPUT SIDE	LENGTH
RED	250 mm
BLUE	250 mm

**Installation Instructions:**

Connect Wires as per details given on the Driver Screen. Keep proper ventilation around the LED Driver and do not stack any object on it. Also a 10-15 cm clearance must be kept when the adjacent device is a heat source. Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.