



T1240 1000-38LB SPECIFICATIONS

IP 20 SELV Equivalent

Constant Current LED Driver

Output Wattage: 38W

• Input Voltage: 240±15%V ac 50Hz

Output Current: 1000mA ±8%

- PC Cabinet
- Output voltage range of 24-38 vdc
- Suitable for Dry Locations
- 440Vac application @ 48Hrs
- Surge Immunity 4kVOVP and UVP Cut-off
- IP 20

| General Specifications | | | |
|---|---|--|--|
| Rated Input Voltage | 240Vac <u>±</u> 15%,50 Hz | | |
| Operating Input Voltage Range | 110-310Vac,50Hz | | |
| Input Current | 0.2A @ 240Vac | | |
| Input Power | 45W Typical | | |
| Power Factor | >0.95 | | |
| THD | <10% | | |
| Efficiency | >85% | | |
| Driver Type | Constant Current | | |
| Output Current | 1000mA ±8% | | |
| Output Voltage Range | 24~38Vdc | | |
| No Load Output Voltage | 60Vdc Max | | |
| Output Power | 38W | | |
| Number of Output Channels | 1 Channel | | |
| Dimming Controller Type/Dimming Range | NA | | |
| Output Type | Suitable for Class II Fixture | | |
| Ambient Operating Temperature Range | -10°C to +50°C | | |
| Max. Case Temperature | 70°C | | |
| Sound Rating | NA | | |
| Input Surge Protection | Line-Neutral 4kV As per EN 61000-4-5 | | |
| Protections | Input Over Current : NON-Resettable | | |
| | Input Over Voltage : Cutoff @ Vin 300±10Vac, Auto Recovery Immunity - 440Vac for 48 Hours | | |
| | Input Under Voltage : Shutdown 100±10Vac, Auto recovery | | |
| | Output Short Circuit : Auto Recovery (HICCUP MODE) | | |
| | Output Open Circuit : Auto Recovery (HICCUP MODE) | | |
| | Output to Ground short: YES | | |
| | Output Overload : YES | | |
| | Over Temperature : YES | | |
| Service Life | 50,000 hours @ Tc Max | | |
| Approvals / Class | SELV Equivalent, Dry Locations | | |
| Warranty | 3 Years | | |
| Weight | 0.160 Kg | | |
| Note: All Performance Specified at 240Vac @ | | | |



T1240 1000-38LB SPECIFICATIONS

Figure 1

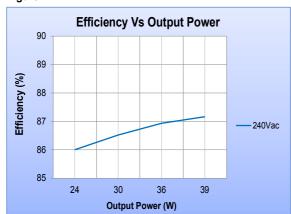


Figure 2

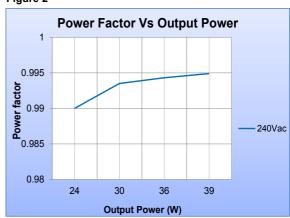


Figure 3



Figure 4


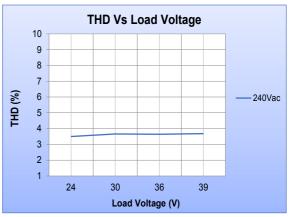


Figure 5




Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years @ Tc Max from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.

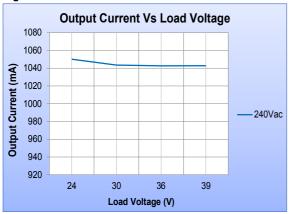


T1240 1000-38LB SPECIFICATIONS



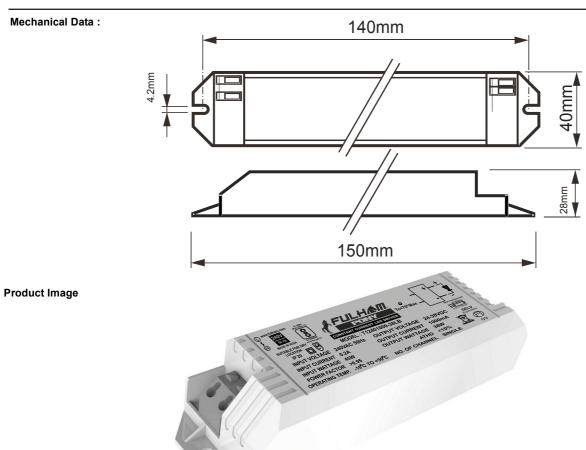


Note: All Dimensions are in mm. Tolerance=±0.5mm

Wiring Diagrams

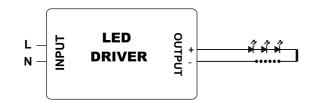

| 2 PIN | GREY | LINE |
|-----------|------|---------|
| CONNECTOR | GREY | NEUTRAL |

| 2 PIN | ORANGE | POSITIVE |
|-----------|--------|----------|
| CONNECTOR | GREY | NEGATIVE |

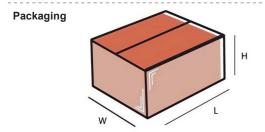

Master carton

| OUTER DIMENSION | | | | | |
|-----------------|-----------------|---|-------|---------|--|
| L | | W | | Н | |
| 300mm | 300mm 20 | | 5mm | 150mm | |
| Net Weight | Gross Weight | | QL | JANTITY | |
| 8.5Kg | 9Kg | | 50pc. | | |

Installation Instructions:

Connect Wires as per details given on the Driver Screen. Keep proper ventilation around the LED Driver and do not stack any object on it. Also a 10-15 cm clearance must be kept when the adjacent device is a heat source. Do not exceed the declared Hot spot temperature(Tc max) under any circumstances.

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years @ Tc Max from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham Product Catalog (www.fulham.com). Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.