

Description: 3.6 W Linear LED Module / 500X12mm / 12LEDs / S6 P2

This LED Module Should be Operated On:

Any LED Driver designed to Provide output Current of 100mA and Voltage 36Vdc


ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	36
NOMINAL INPUT CURRENT (mA)	100
NOMINAL POWER CONSUMPTION(W)	3.6
PCB SIZE (mm)	LINEAR 500 x 12MM
PCB MATERIAL TYPE	FR-4
CCT	6500K / 5700K / 4000K
CALCULATED USABLE ARRAY FLUX (lm)	600 / 600 / 600
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	45
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-40 to 50
MAXIMUM T _c (°C)	75
BEAM ANGLE	120°
CRI (Typ)	80

MECHANICAL DATA

SYM	DIAM	TOL	QTY	NOTE
x	3.000	mm	4	
TOTAL			4	

WIRING DIAGRAMS

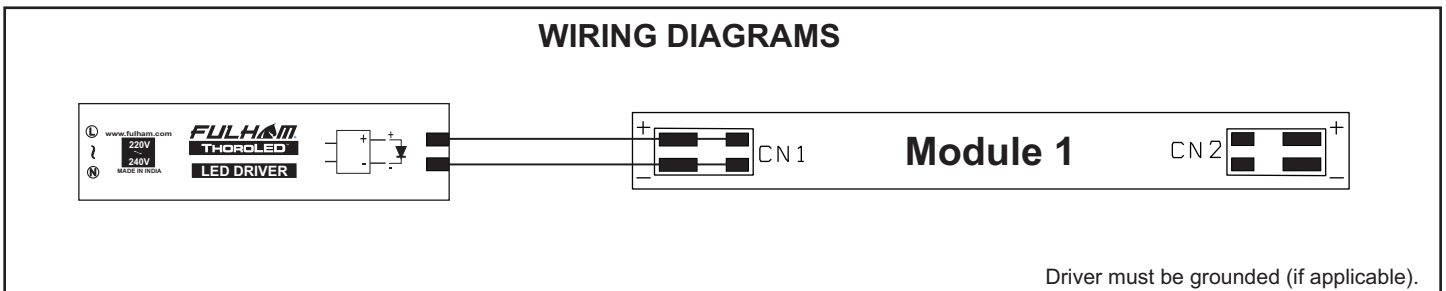

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.