

**Description:** 5.4W Linear LED Module / 280x15mm / 12LEDs / S6 P2


**This LED Module Should be Operated On:**

Any LED Driver designed to Provide output Current of 300mA and Voltage 18Vdc

**ELECTRICAL DATA**

NOMINAL INPUT VOLTAGE (V <sub>DC</sub> )	18
NOMINAL INPUT CURRENT (mA)	300
NOMINAL POWER CONSUMPTION(W)	5.4
PCB SIZE (mm)	LINEAR 280 x 15MM
PCB MATERIAL TYPE	FR-4
CCT	5700K / 4000K / 2700K
CALCULATED USABLE ARRAY FLUX (lm)	760 / 750 / 650
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	20
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T <sub>c</sub> (°C)	75
BEAM ANGLE	115°
CRI (Typ)	80


**MECHANICAL DATA**

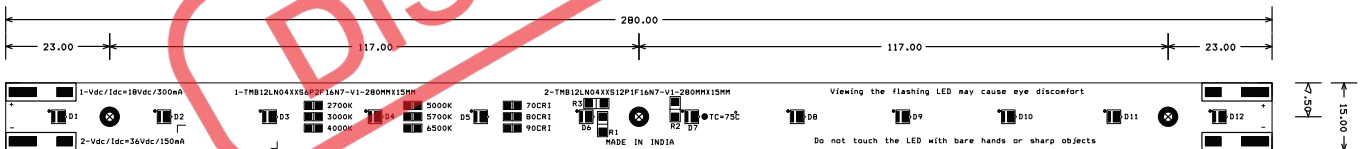

NOTE : ALL DIMENSIONS ARE IN MM

SYM	DIAM	TOL	QTY	NOTE
x	4.000 mm		3	
TOTAL			3	

**WIRING DIAGRAMS**



Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.