

Description: 4.50 W Linear LED Module / 480X12mm / 15LEDs / S5 P3


This LED Module Should be Operated On:

Any LED Driver designed to Provide output Current of 150mA and Voltage 30Vdc

ELECTRICAL DATA


NOMINAL INPUT VOLTAGE (V _{DC})	30
NOMINAL INPUT CURRENT (mA)	150
NOMINAL POWER CONSUMPTION(W)	4.50
PCB SIZE (mm)	LINEAR 480 x 12MM
PCB MATERIAL TYPE	FR-4
CCT	4000K/5700K/6500K
CALCULATED USABLE ARRAY FLUX (lm)	740
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	30
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-40 to 50
MAXIMUM T _c (°C)	85
BEAM ANGLE	120°
CRI (Typ)	80

MECHANICAL DATA

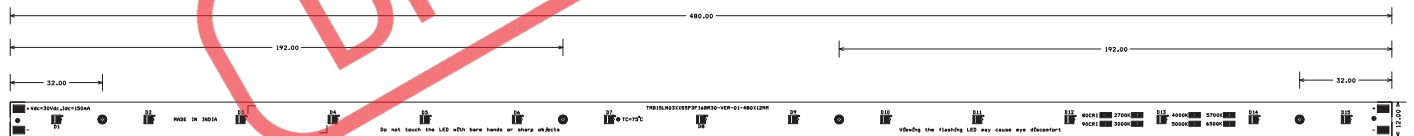

SYM	DIAM	TOL	QTY	NOTE
x	3.000 mm		4	
TOTAL				4

WIRING DIAGRAMS



Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.