

Description: 5.4W Linear LED Module / 280x30mm / 18LEDs / S6 P3


This LED Module Should be Operated On:

Any LED Driver designed to Provide output Current of 300mA and Voltage 18Vdc

ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	18
NOMINAL INPUT CURRENT (mA)	300
NOMINAL POWER CONSUMPTION(W)	5.4
PCB SIZE (mm)	LINEAR 280 x 30MM
PCB MATERIAL TYPE	FR-4
CCT	6500K / 4000K / 2700K
CALCULATED USABLE ARRAY FLUX (lm)	770 / 730 / 630
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	30
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T _c (°C)	75
BEAM ANGLE	115°
CRI (Typ)	80


MECHANICAL DATA

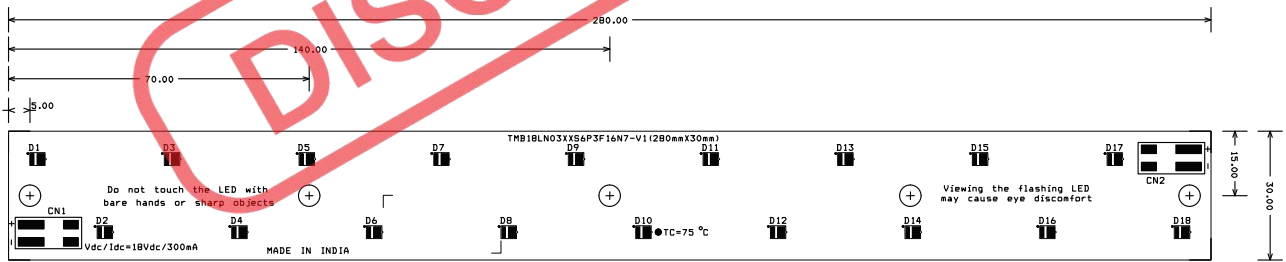

NOTE-ALL DIMENSIONS ARE IN MM

DRILL CHART				
SYM	DIAM	TOL	QTY	NOTE
+	4.000 mm	0.025 / 0.002	5	MOUNTING HOLES
TOTAL			5	

WIRING DIAGRAMS



Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.