

Description: 37.8W Rectangle LED Module / 135X184mm / 18LEDs / S9 P1 2Channel


This LED Module Should be Operated On:

Any LED Driver designed to provide output Current of 700mA and Voltage 27Vdc per channel.

ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	2X27
NOMINAL INPUT CURRENT (mA)	2X700
NOMINAL POWER CONSUMPTION(W)	2X18.9=37.8
PCB SIZE (mm)	RECTANGLE 135X184
PCB MATERIAL TYPE	MCPCB
CCT	5700K
CALCULATED USABLE ARRAY FLUX (lm)	2X2220=4440
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	110
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T _c (°C)	100
BEAM ANGLE	120°
CRI (Typ)	80


MECHANICAL DATA

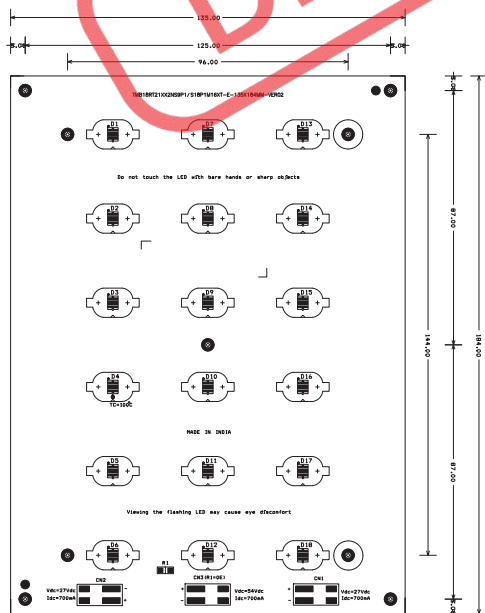

PCB SIZE-135X184MM

DRILL CHART				
SYM	DIAM	TOL	QTY	NOTE
∅	1.950	mm	36	
∅	4.000	mm	9	
TOTAL			45	

WIRING DIAGRAMS

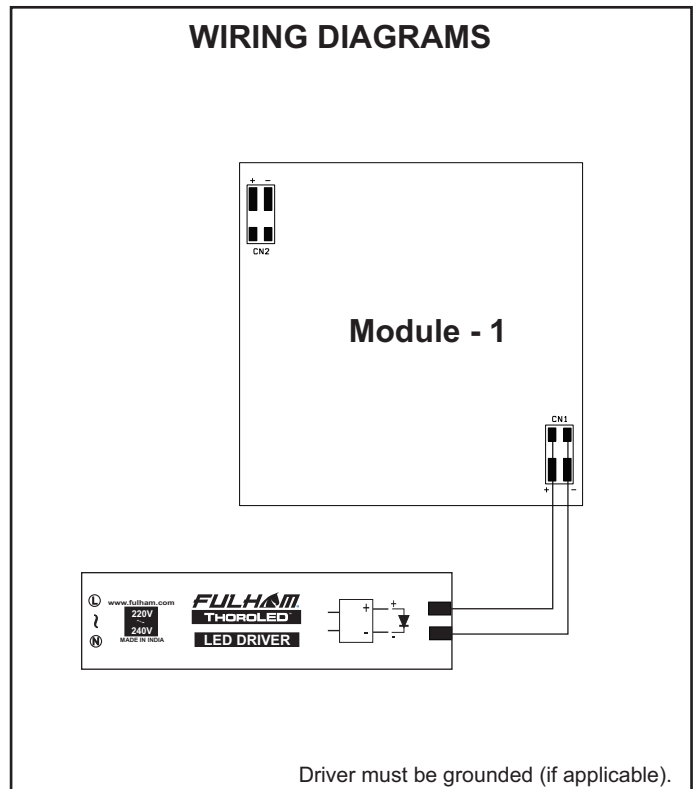

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.