

**Description:** 10.80 W Linear LED Module / 585X15mm / 24LEDs / S12 P2


**This LED Module Should be Operated On:**

Any LED Driver designed to Provide output Current of 300mA and Voltage 36Vdc

**ELECTRICAL DATA**

NOMINAL INPUT VOLTAGE (V <sub>DC</sub> )	36
NOMINAL INPUT CURRENT (mA)	300
NOMINAL POWER CONSUMPTION(W)	10.80
PCB SIZE (mm)	LINEAR 585 x 15MM
PCB MATERIAL TYPE	FR-4
CCT	5700K / 4000K / 2700K
CALCULATED USABLE ARRAY FLUX (lm)	1530 / 1500 / 1300
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	60
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T <sub>c</sub> (°C)	75
BEAM ANGLE	115°
CRI (Typ)	80


**MECHANICAL DATA**

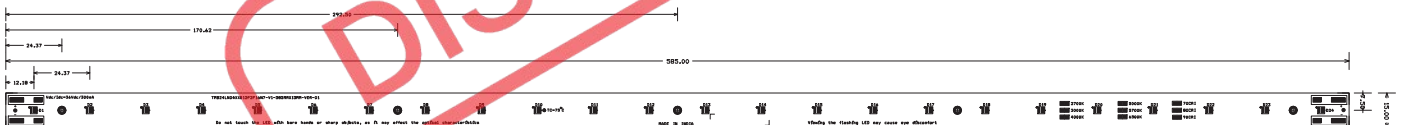

PCB SIZE-585X15MM

DRILL CHART				
SYM	DIAM	TOL	QTY	NOTE
1	3.250	mm	5	
TOTAL			5	

**WIRING DIAGRAMS**



Driver must be grounded (if applicable).

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog ([www.fulham.com](http://www.fulham.com))  
**Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.**