

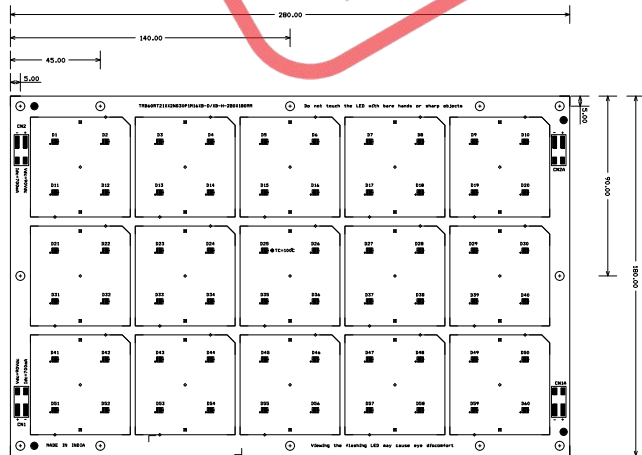
Description: 126W Rectangle LED Module / 280x180mm / 60LEDs / S30 P1 2Channel

This LED Module Should be Operated On:

Any LED Driver designed to Provide output Current of 700mA and Voltage 90Vdc per Channel

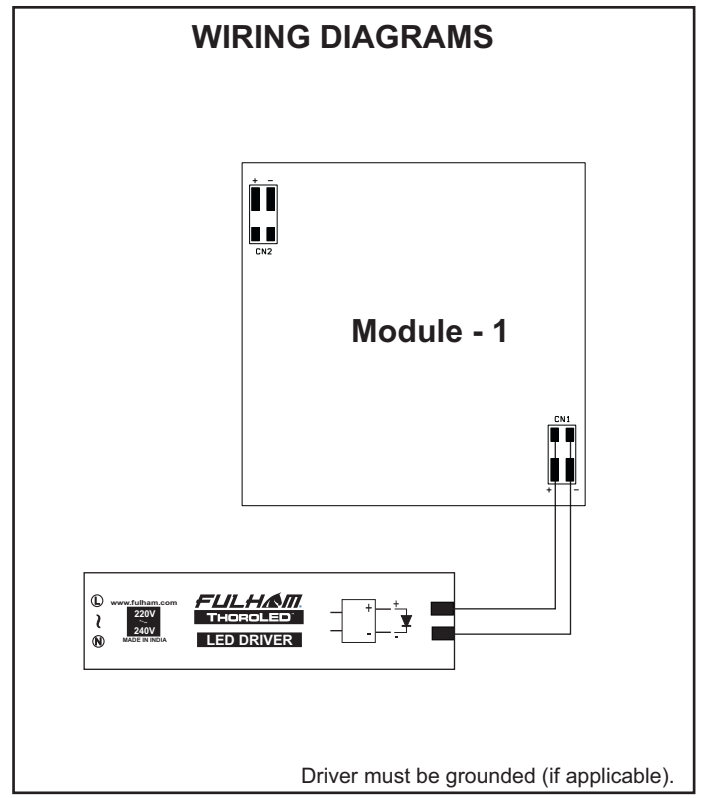
ELECTRICAL DATA

NOMINAL INPUT VOLTAGE (V _{DC})	2x90
NOMINAL INPUT CURRENT (mA)	2x700
NOMINAL POWER CONSUMPTION(W)	2x63=126
PCB SIZE (mm)	RECTANGLE 280 x 180MM
PCB MATERIAL TYPE	MCPCB
CCT	5000K
CALCULATED USABLE ARRAY FLUX (lm)	2x7200=14400
RECOMMENDED ATTACHMENT METHOD	M3 Pan Head Screw
WEIGHT (gm)	220
MAXIMUM STORAGE TEMPERATURE (°C)	-40 to 100
MAXIMUM OPERATING AMBIENT TEMPERATURE (°C)	-35 to 50
MAXIMUM T _c (°C)	100
BEAM ANGLE	115°
CRI (Typ)	80

MECHANICAL DATA


NOTE : ALL DIMENSIONS ARE IN MM

SYMH	DIAP	TOL	QTY	NOTE
1	2.000	+0.005 / -0.005	30	
2	2.000	+0.005 / -0.005	45	
3	4.000	+0.005 / -0.005	12	MOUNTING HOLE
	TOTAL		87	

WIRING DIAGRAMS


Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 3 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.