FULHAM

"AT A GLANCE"



Tri-Dim; 0-10V, ELV and TRIAC

65W in a compact case form factor

Field Programmable -500-1800mA



comina soon



Specialty Applications Include: Refrigeration Signage, Cove, Mirror, Landscaping, Decorative, Flex Tape/Linear Runs

Constant Voltage (CV) 12V and 24V Dimmable and Non-dimmable versions









(WHSG) OUTDOOR PROGRAMMABLE DRIVERS

Non-Class 2 LED Drivers (75W-320W) with Multiple Options per Wattage (Different Output Current & Voltage)


IP66, Type HL, high input surge (6kV/10kV), Dry & Damp Rated, 0-10V Dimming

Field Programmable on a wide range of output current with TPSB-100



PN: DST-FLYER-ESS-DRIVERS

FULHAM

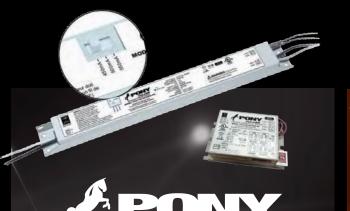

(PYCC) SELECTABLE CURRENT LED DRIVERS

Versatility with 7 linear models that cover 300-1300mA; 4 compact models covering 250-1000mA; (Vf 30-42V)

3 or 4 Selectable Preset Currents per model via a dip switch

Cost Effective Solution without a programmer





(THCC) Programmable Indoor LED Drivers

The power to create the right driver for any situation: 30W, 50W, 85W

Wide programmable current range across 3 models (350-2400mA)

Linear, Compact & BLS form factors – some with leads, some with push-in connectors



"AT A GLANCE"



(WHCC) Programmable Outdoor LED Drivers

Small form factors with extruded aluminum design for thermal performance

Type HL, high input surge (6kV/10kV), IP65/66

Field Programmable with handheld programmer TPSB-100 (350-2670mA)



PN: DST-FLYER-ESS-DRIVERS