



FHCH20




Chicago Code Steel LED Exit Signs

- Sealed push-to-test switch
- White corrosion-resistant polyester powder coat paint
- LED charge indicator
- Sealed AC ready light
- NiCd premium battery
- Dual voltage 120V/277V
- Steel Canopy Allows Ceiling Or End Mounting
- Specification grade design
- Universal mounting pattern knockout in backplate for J-box mounting
- UL Listed in accordance with UL924

General Specifications

	AC Only (AC)	Battery Backup (EM)
Input Voltage	120/277VAC	
Input Current (120V)	23mA	37mA
Input Current (277V)	10mA	16mA
Input Power (120V)	2.5W	4.4W
Input Power (277V)	2.5W	4.4W
Operating Frequency	60Hz	
Overall Size	11.10" L x 12.72" H - Battery Backup (EM) 11" L x 9.875" H - AC Only (AC)	
Emergency Operation	90 minutes	
Compliance	UL 924 Listed Damp Location City of Chicago approved	
Warranty	5 years from the date of manufacture	

Mechanical Data

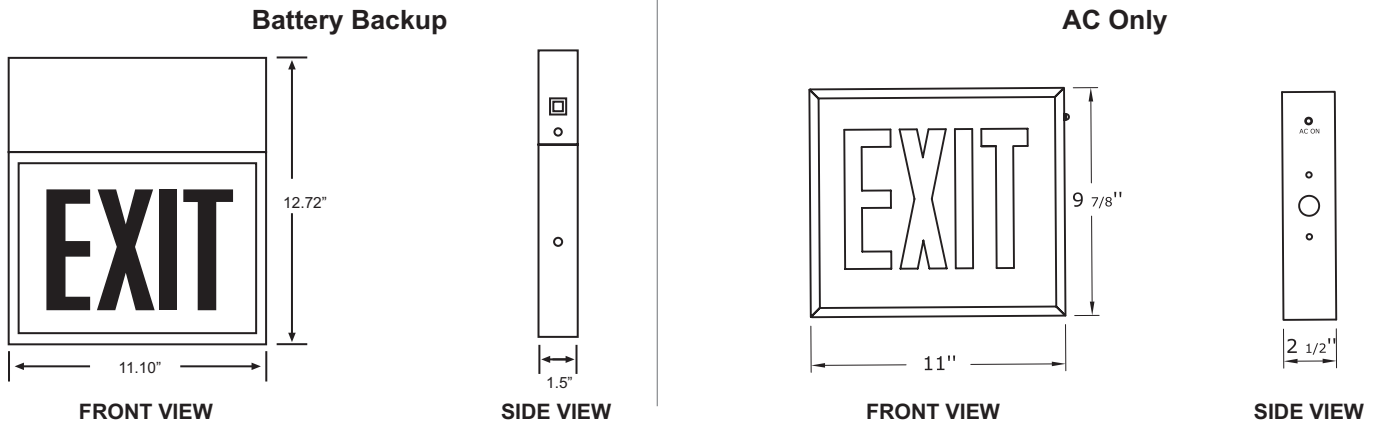

Part Number Matrix

FHCH20

S

DA

EM

Number of Faces
S = Single
D = Double

Directional Arrows
LA = Left Arrow
RA = Right Arrow
DA = Double Arrow
NA = No Arrow

Operation
AC = AC Only
EM = Battery Backup