

## FHEC31



## Thermoplastic Micro LED Exit Sign/Emergency Light Combo

- Injection-molded, high impact, UV-stabilized, UL94 V-0 • thermoplastic
- Dual voltage 120V/277V
- LED Charge Indicator


- Snap-fit faceplate design for installation without tools, extra faceplate included •
- Fully adjustable glare free lighting heads •

Discontinued

Contact Fulham for availability. Not for use in new designs.

UL Listed in accordance with UL924

eneral Specifications			
	Red	Green	Remote Capable
Input Voltage	120/277VAC		
Input Current (120V)	10mA	10mA	120mA
Input Current (277V)	5mA	5mA	60mA
Input Power (120V)	10W	10W	15W
Input Power (277V)	10W	10W	15W
Operating Frequency	60Hz		
Lamp Type	5.4W DC Incandescent		
Battery Type	Sealed Lead-Acid Battery 6Vdc		
Overall Size	21.8" L x 10.875" H		
Emergency Operation	90 minutes		
Compliance and Safety	UL 924 Listed		
	Damp Location		
Warranty	5 years from the date of manufacture		

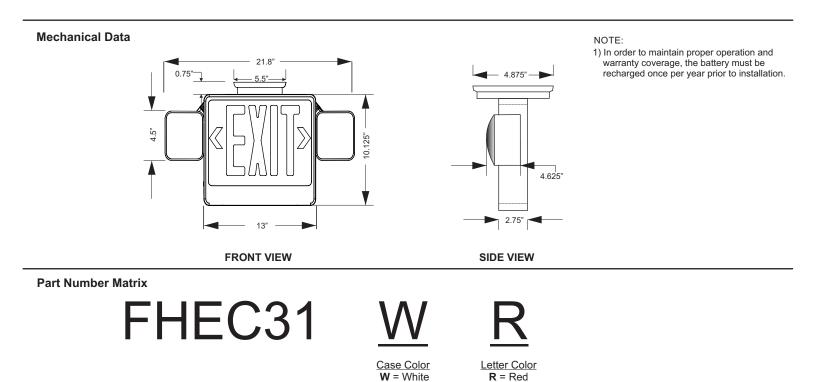

G = Green

## 2011-376 Rev J