



FHEM15


Wet-Location Adjustable Emergency Lights

- Push to test switch
- LED charge indicator
- Universal mount
- Remote capable
- Maintenance Free, 6V 10Ah SLA Battery
- Two 6VDC, 7.2W, PAR 36 fully adjustable glare free lamp heads
- High output remote head capability
- Constructed of corrosion resistant grey fiberglass
- Dual voltage 120V/277V
- UL listed in accordance with UL924

General Specifications

Input Voltage	120/277VAC
Input Current (120V)	51mA
Input Current (277V)	53mA
Input Power (120V)	5.15W
Input Power (277V)	5.36W
Operating Frequency	50/60Hz
Operating Ambient Temperature Range (Ta)	Ambient temperature rating: 10°C to 40°C wet
Overall Size	12.30" L x 4.90" H
Emergency Operation	90 minutes
Compliance	UL 924 Listed Wet Location
Warranty	5 years from the date of manufacture

Mechanical Data

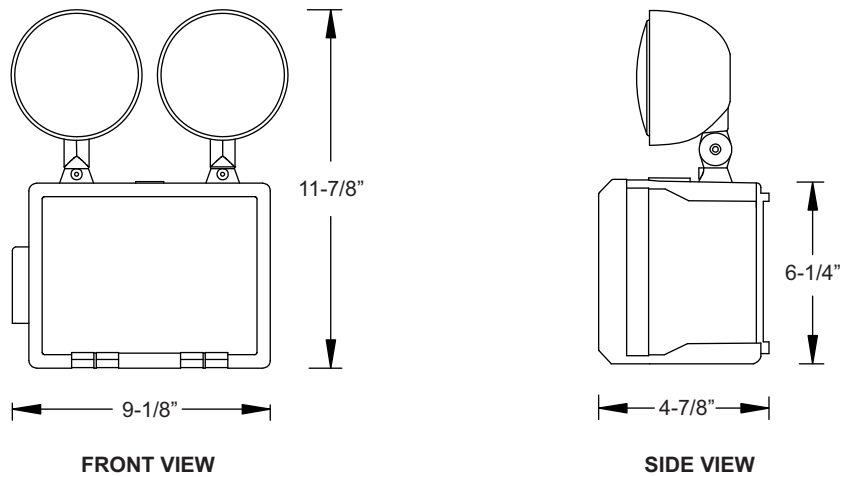

Part Number Matrix

FHEM15

This product does not meet CEC Title 20 Code of Regulations.