



# FHNY10





## New York City Code Steel Emergency Lights

- Push-to-test switch
- LED charge indicator
- Specification grade design
- Heavy duty 20 gauge construction
- Maintenance free, 6V, 12V sealed lead-acid battery
- Universal mounting pattern knockout in backplate for J-Box mounting
- High output remote head capability
- Automatic low voltage disconnect (LVD)
- UL listed in accordance with UL924

### General Specifications

	FHNY1029	FHNY1039	FHNY10312
Input Voltage	120/277VAC		
Input Current (120V)	31.6mA	64.4mA	135mA
Input Current (277V)	18.2mA	37.6mA	60mA
Input Power (120V)	4.66W	7.21W	14W
Input Power (277V)	4.90W	8.09W	14W
Output Power	18W	27W	50W
Lamp Wattage	2 x 9W (18W)	3 x 9W (27W)	3 x 12W (50W)
Operating Frequency	60Hz		
Operating Ambient Temperature Range (Ta)	10° to 40°C / 50°F to 104°F		
Overall Size	10.2" L x 15.5" H (FHNY1029) 14.5" L x 16.5" H (FHNY1039 / FHNY10312)		
Emergency Operation	90 minutes		
Compliance	UL 924 Listed Damp Location		
Warranty	5 years from the date of manufacture		

### Mechanical Data

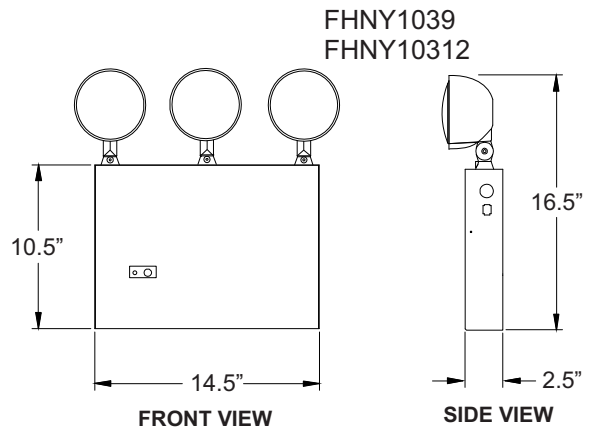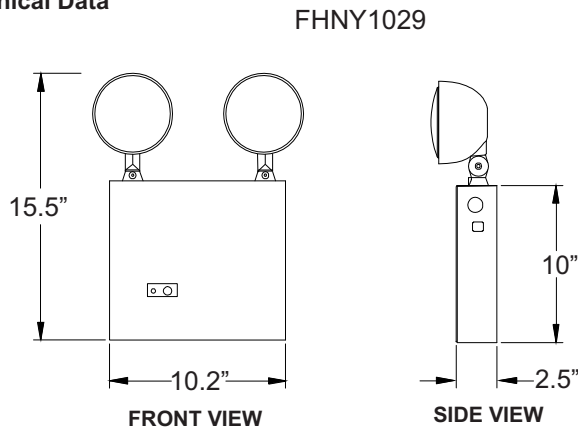

### Part Number Matrix

# FHNY10 29

Option

- 29 = 6V, 18W (2 x 9W Lamp Heads)
- 39 = 6V, 27W (3 x 9W Lamp Heads)
- 312 = 12V, 50W (3 x 12W Lamp Heads)