



# FLPL10

## Photoluminescent Exit Sign

### Specifications



NO additional electrical or mechanical source required. Before installation, it must be determined that there is a minimum of 5Fc of LED or fluorescent light on the face(s) of the sign at all times during building occupancy.

UL 924 Emergency Lighting and Power Equipment Listed through ETL;  
Meets NFPA Life Safety Code 101 and OSHA requirements;  
International Building Code 2009; International Fire Code 2009

### Standard Features

- High Illumination Non-Electric Photoluminescent Technology
- Non-Radioactive, Non-Toxic, Flame Retardant Materials
- Impact-Resistant, Waterproof
- Long Life Corrosion-Proof Construction (20 Yrs. Est.)
- High Visibility In Total Darkness And Smoke Filled Conditions
- Field Applied Directional Chevrons
- Suitable For Floor Proximity Installation
- 100 Ft Viewing Distance
- Abs Plastic Construction With Photoluminescent Lettering
- Lead Points Qualified
- Both High And Low Location Approved
- Can Be Relocated If Path Of Egress Changes
- Designed For Surface, Flag And Ceiling Mount With Optional frame and mounting bracket.

### Mechanical Data

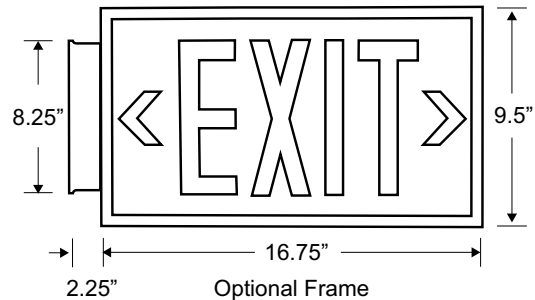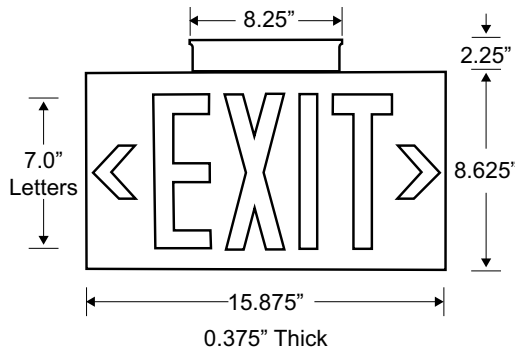

Multiple mounting options shown.

### Part Number Matrix

**FLPL10**

**S**

Number of Faces  
**S** = Single  
**D** = Dual

**G**

Background Color  
**G** = Green  
**R** = Red

**B**

Frame Color  
**B** = Black  
**Blank** = No Frame