

Description: Programmed Start Electronic Ballast

Lamps Operated:




2x F35T5, F28T5, F21T5, F14T5


ELECTRICAL DATA

INPUT VOLT	120~277VAC, >45kHz
LAMP WATTS/TYPE	F35T5, F28T5, F21T5, F14T5
LAMPS OPERATED	2
LINE CURRENT	0.68A @ 120V thru 0.14A @ 277V
POWER FACTOR	High Power Factor
SOUND RATING	"A"
BALLAST TYPE	Programmed Start
PCB	No
PROTECTION	Inherent Thermal Protection, End of Lamp Life Protection
TC MAX	75°C (167°F)
DIMMING	0-10V
DIMMING RANGE	1% - 100%
MIN. OPERATING TEMP	10°C (50°F)
APPROVALS/CLASS	Class P - Type CC
TYPE	HL
APPLICABLE DIMMERS	Lutron NTFTV, Lutron NFTV-WH, Leviton IP710-DLX
Auto-Restart After Replacement of Defective Lamp	
Automatic Identification of Lamp Type	

MECHANICAL DATA

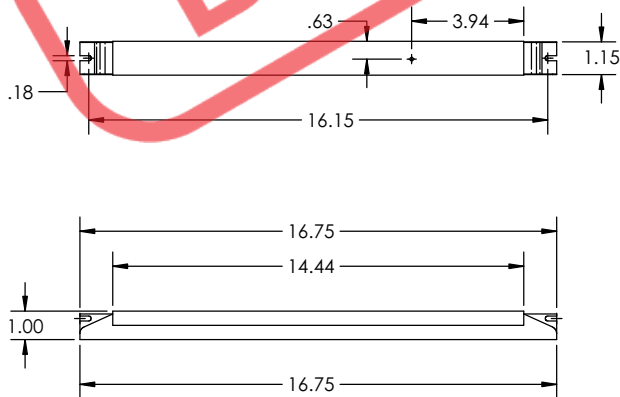

WIRING DIAGRAMS

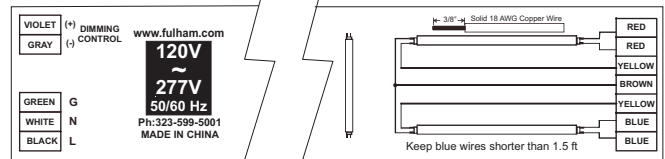

Ballast must be properly grounded.
Operate new lamp for 100 hours at full output prior to the first dimming

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described. © Fulham Company Limited, All Rights Reserved.