

Discontinued

Contact Fulham for availability, Not for use in new designs.

SPECIFICATION SHEET: LH1-120-L

This Is An Original Product From Fulham Co., Inc


Description: LongHorse Series Versatile, Solid State Electronic Ballast. Small C	ase Size,
High Power Factor, Light Weight, Available In 120/277V 50/60 Hz.	

This Ballast Will Operate Following Lamps.

F13T8	

ELECTRICAL DATA

INPUT VOLT: 120V ± 10%	,50/60Hz	-		-			
LAMP WATTS/TYPE	LAMPS OPERATED	INPUT WATTS	LINE CURRENT	BALLAST FACTOR	EFFICACY FACTOR		
F13T2	2	28	0.25	0.9	3.4		
18CFTR	1	18	0.16	0.9	5.2		
POWER FACTOR	> 0.9						
THD	< 34.6 %						
EMI/RFI COMPLIANCE	FCC PART 18-A						
SOUND RATING	" A "						
BALLAST TYPE	IN STANT START						
VOLTAGE TRANSIENTS	ANSIC82.11 - 1993						
INPUT/PROTECTION	FUSE						
REMOTE MOUNTING	20ft Max.						
MIN. OPERATING TEMP	- 30 °C (- 20 °F)						
MAX. CASE TEMP	70 °C (158 °F)						
ENERGY STAR 4.0			-				
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR						

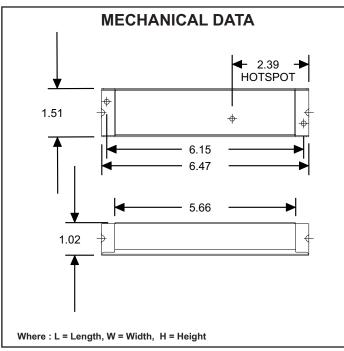

WIRING DIAGRAMS							
WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN	
LENGTH - INCHES	12 <u>+</u> 1"	12 <u>+</u> 1"	24 <u>+</u> 1"	-	24 <u>+</u> 1"	-	

WIRING DIAGRAMS DEPENDS ON THE LAMP TYPE. PLEASE REFER TO FULHAM'S CATALOG.

NOTE : This Ballast Must Be Grounded

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of <u>5 years</u> from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com) **Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.**