




RoHS COMPLIANT

SC-120-132-T8XL

Rapid Start Fluorescent Ballast

- Solid State Electronic Ballast
- Input Voltage: 120VAC, 50/60Hz
- Rapid Start
- UL / cUL Listed, Class P, 1 Outdoor, RoHS

This Ballast Will Operate Following Lamps:



F32T8 / F25T8/ F17T8 / F15T8


General Specifications

Input Voltage	120VAC, 50 / 60Hz
Lamps Operated	1 Lamp
EMI / RFI Compliance	FCC Part 18-B (Consumer)
Sound Rating	"A"
Ballast Type	Rapid Start
Voltage Transients	ANSI 62.41
Input Protection	Fuse
Output Protection	EOL
Min. Operating Temp	0°C (32°F)
Max. Case Temp	75°C (167°F)
Type	"CC" Rated
Approvals Class	UL / cUL Listed, Class "P", 1 Outdoor, RoHS Compliant
Warranty	2 Years from the date of manufacture when properly installed.

Electrical Data


Lamp Wattage / Type	Lamps Operated	Input Wattage	Line Current	PowerFactor	Ballast Factor	Efficacy Factor	THD	Current Crest Factor
F32T8	1	28	0.42	0.56	0.90	3.21	126%	>1.7
F25T8	1	24	0.35	0.55	1.03	4.35	131%	>1.7
F17T8	1	19	0.29	0.54	1.20	6.39	140%	>1.7
F15T8	1	17	0.27	0.53	1.26	7.41	145%	>1.7

Mechanical Data

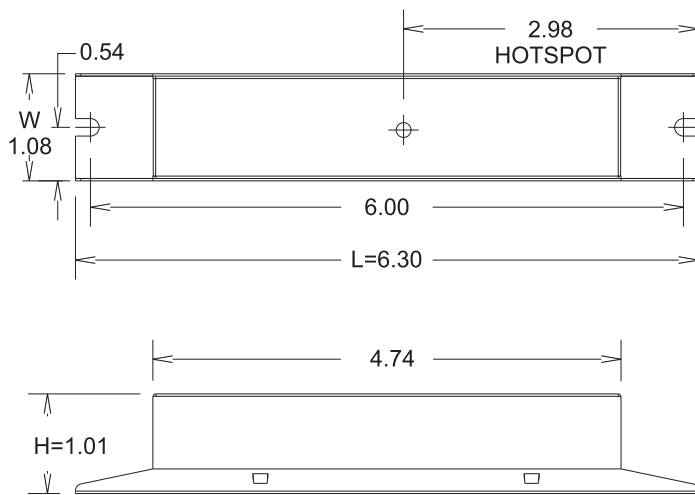

Wiring Diagrams

Wire Color	Length (Inches)	Wire Color	Length (Inches)
Black	12" ±1"	Red	36" ±1"
White	12" ±1"	Blue	36" ±1"

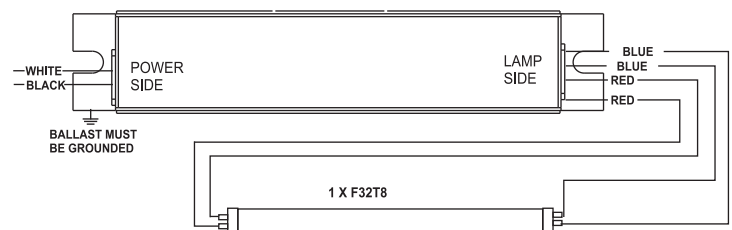

Where : L = Length, W = Width, H = Height

NOTE : This Ballast Case Must Be Grounded