

SPECIFICATION SHEET : SNS-277-1216-IS

This Is An Original Product From Fulham Co., Inc

Description: Sinehorse Series, High Frequency Electronic, Drop In Replacement for Magnetic, Parallel Wiring, Indoor and Outdoor Sign Applications

This Ballast Will Operate Following Lamps.




Fluorescent Lamp Ballast for any 1 or 2 lamp combination of 800mA T12HO lamps. NO single lamp may be longer than 8 feet.

ELECTRICAL DATA (277V APPLICATION)


INPUT VOLT: 277V ± 10%, 50/60Hz								
LAMP WATTS/TYPE	F24T12HO	F48T12HO	F96T12HO	F30T12HO	F24T12HO F72T12HO	F96T12HO	-	-
LAMPS OPERATED	1			2	1 OF EACH	2		
INPUT POWER (W)	27	45	81	51	72	134		
LINE CURRENT (A)	0.13	0.19	0.30	0.19	0.27	0.49		
POWER FACTOR	> 0.9							
THD	< 10 %							
CURRENT CREST FACTOR	< 1.7							
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)							
SOUND RATING	" A "							
BALLAST TYPE	INSTANT START							
VOLTAGE TRANSIENTS	-							
INPUT/PROTECTION	FUSE							
OUTPUT/PROTECTION	DEACTIVATED LAMP PROTECTION							
MIN. OPERATING TEMP	-30 °C (-22 ° F)							
MAX. CASE TEMP	70 °C (158 ° F)							
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 2 OUTDOOR							

MECHANICAL DATA

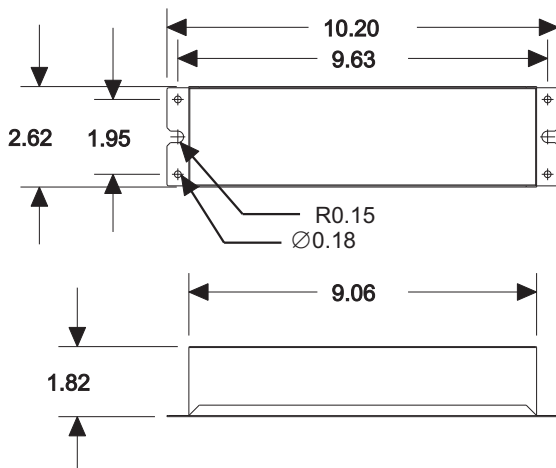

WIRING DIAGRAM

WIRES	WHT	BLK	RED	BLU	YEL	YEL/BLK		
LENGTH-INCHES	36 ± 1"	36 ± 1"	132 ± 1"	132 ± 1"				

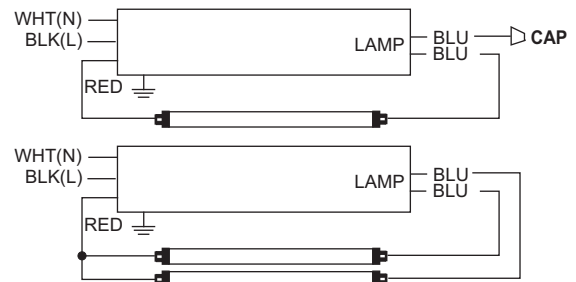

NOTE : This Ballast Case Must Be Grounded