

- Programmable LED Driver
- Output Wattage: 200W
- Universal Voltage (120-277VAC)
- CC Programmable 500-1400mA
- Dali Dimming
- Long Case and Wire
- Output voltage range of 80-280VDC

General Specifications

Input Voltage	120-277VAC, 50/60 Hz
Input Current	1.83A
Input Power	220W
Standby Power	<0.5W
NTC Input	Ext. NTC Derating Resistance Range: 1k to 51k Ohm programmable. Default/Recommended Ext. NTC P/N: TSM2A104J4503RZ, SMD0805, Thinking Electronic.
Power Factor	>0.9
THD	<20%
Efficiency	91% Typical
Driver Type	Constant Current, Constant Power
Output Current	500-1400mA Programmable; See Label For Set Current; To Program Use R-SET (Figure 1) Or TPSB-100 (Programmer); Record New Setting On 1"x0.5" Label
Output Voltage Range	80-280VDC
Output Power	200W Max.
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	DALI / 100%-10%, 0%
RFI/EMI	FCC Part 15B Consumer, EN55015
Output Type	NON Class 2
Potting Type / Degree of Fill	Potting As Per ASTM D36-86 / Fully Potted
Ambient Operating Temperature Range	-40°C to 50°C (-40°F to 122°F)
Max. Case Temperature	81°C (177.8°F)
Sound Rating	A
Input Surge Protection	Line-Neutral 6kV, Line & Neutral-Ground 6kV
Input Current Protection	Output Short Circuit Protection
Output Short Circuit Protection	Output Open Circuit Protection
Output Open Circuit Protection	Output to Ground Short Protection
Output to Ground Short Protection	Overload Protection
Overload Protection	Over Temperature Protection
Over Temperature Protection	Runtime Counting of Every 10 Degrees
Runtime Counting of Every 10 Degrees	Yes
Service Life	50,000 hours @Tc 75°C (167°F)
Approvals / Class	Type HL, FCC, Dry and Damp Locations
Warranty	5 years

Figure 1


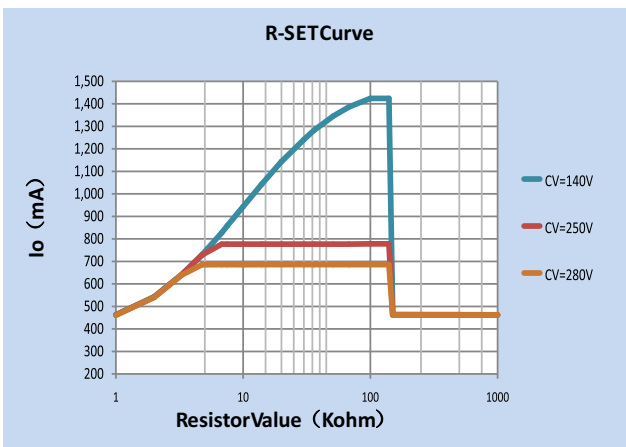


Figure 2

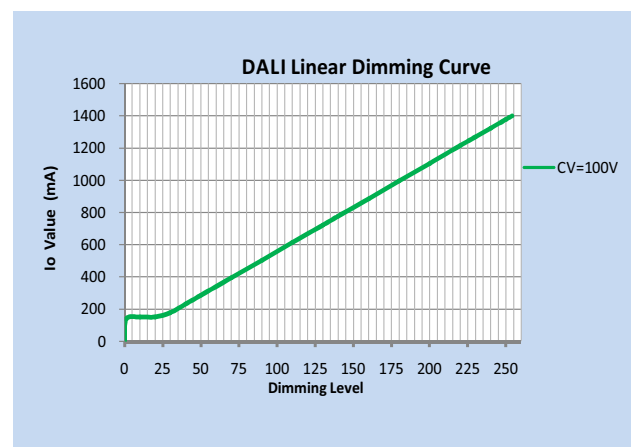

Fulham extends a limited warranty to the original purchaser or first user for a period of 5 years @ Tc 75°C from the date of manufacture when properly installed and operated under normal conditions of use. The usage of appropriate series connected Surge Protection Device (SPD) is required in high risk applications. For complete terms and conditions, please refer to the Warranty Center at www.fulham.com. Specifications subject to change without notice.

Figure 3

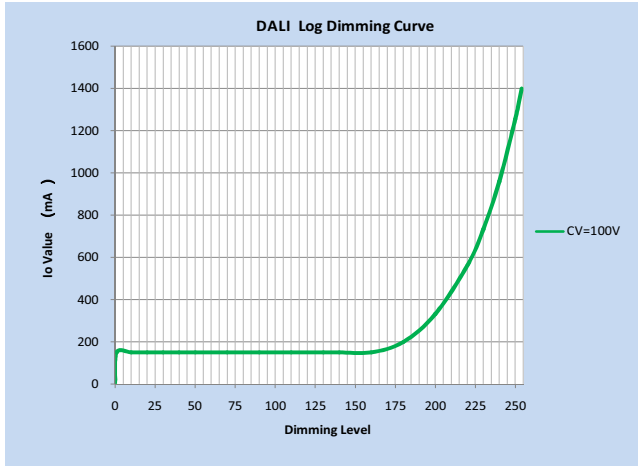


Figure 4

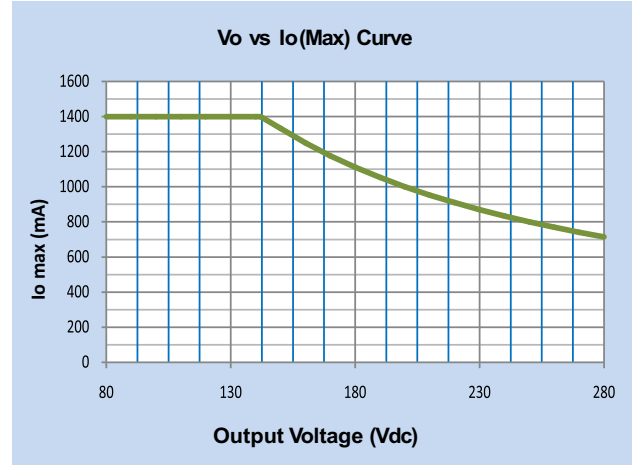


Figure 5

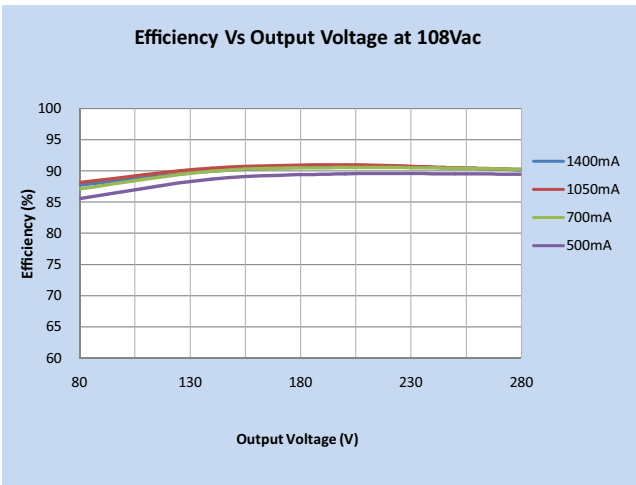


Figure 6

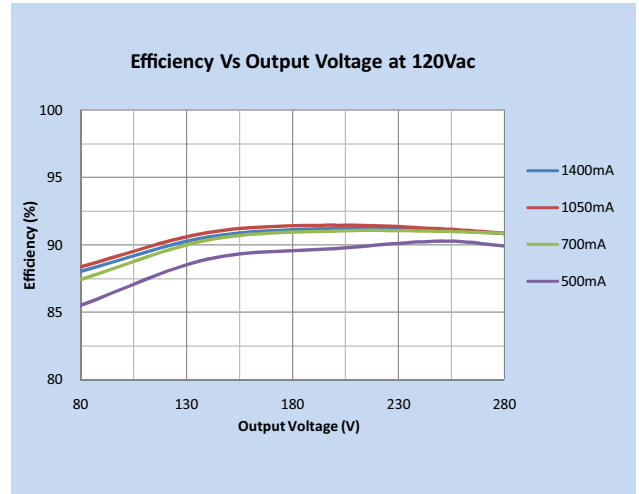


Figure 7


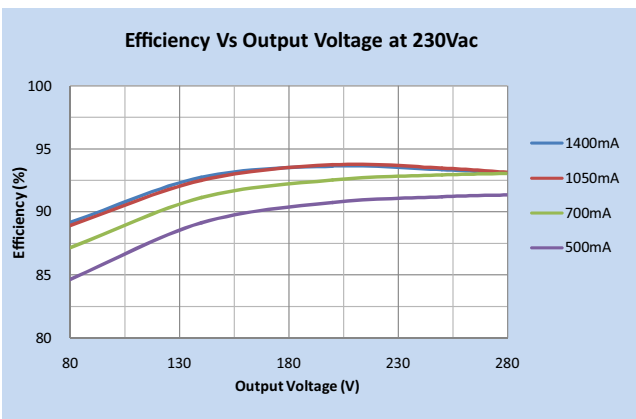


Figure 8

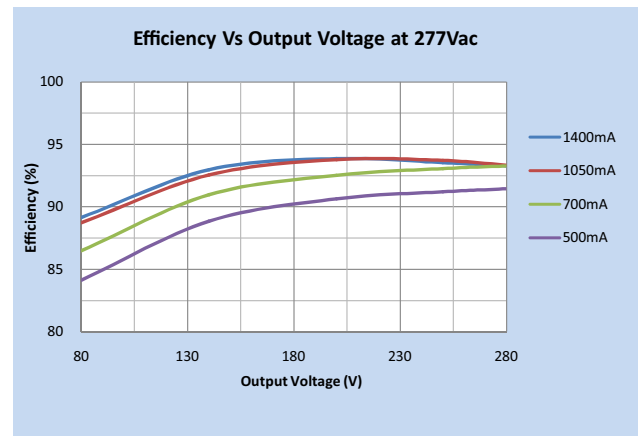

Fulham extends a limited warranty to the original purchaser or first user for a period of 5 years @ Tc 75°C from the date of manufacture when properly installed and operated under normal conditions of use. The usage of appropriate series connected Surge Protection Device (SPD) is required in high risk applications. For complete terms and conditions, please refer to the Warranty Center at www.fulham.com. Specifications subject to change without notice.

Figure 8

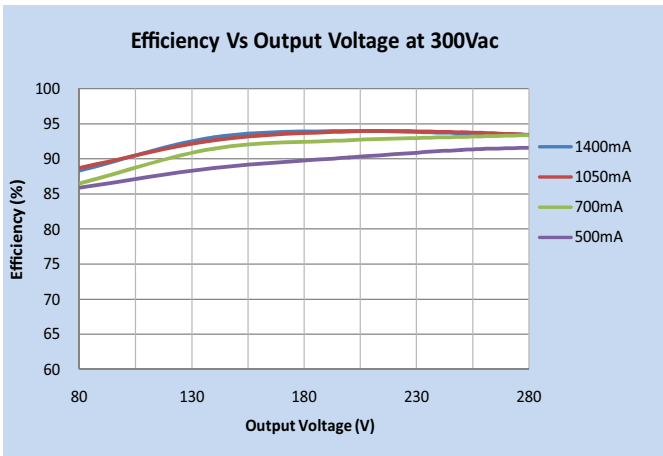


Figure 9

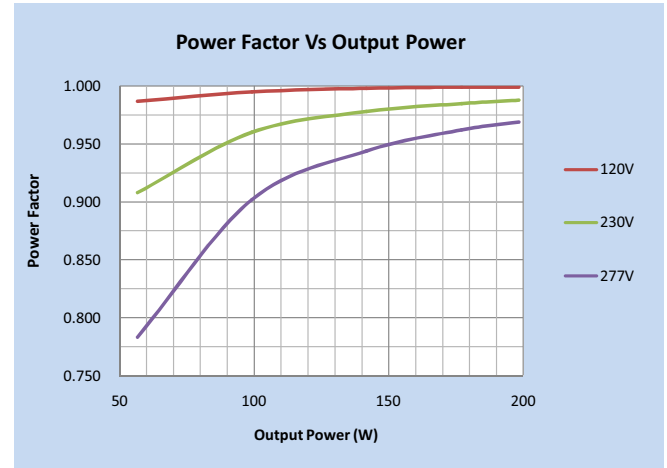


Figure 10

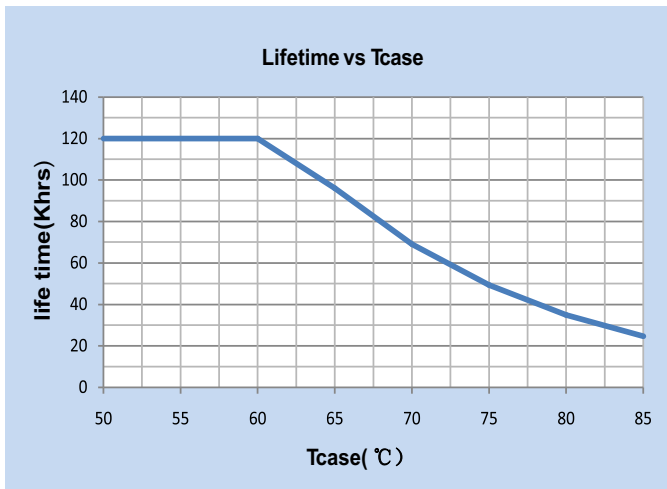


Figure 11

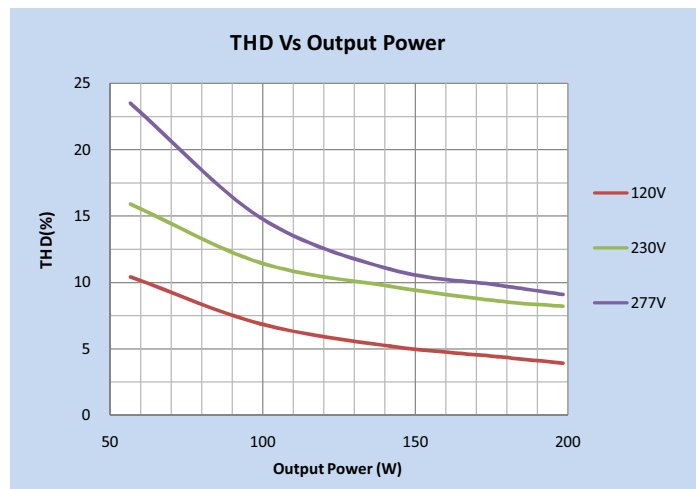


Figure 12



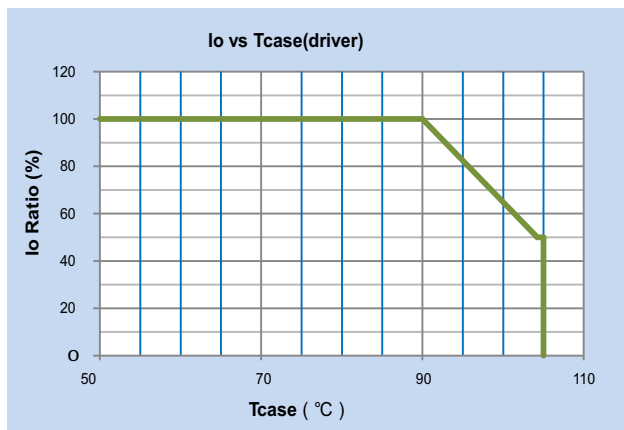


Figure 13

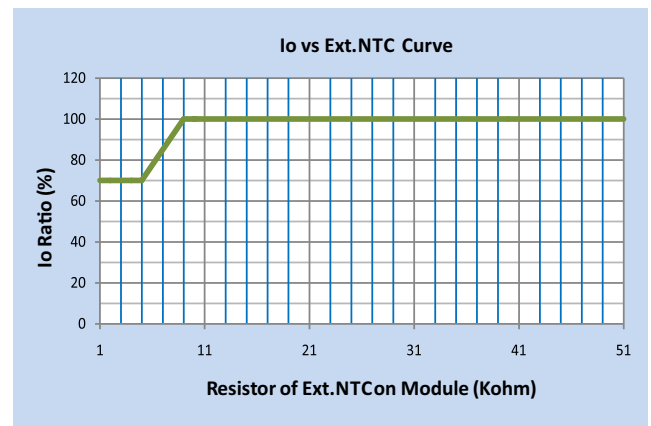

Fulham extends a limited warranty to the original purchaser or first user for a period of 5 years @ Tc 75°C from the date of manufacture when properly installed and operated under normal conditions of use. The usage of appropriate series connected Surge Protection Device (SPD) is required in high risk applications. For complete terms and conditions, please refer to the Warranty Center at www.fulham.com. Specifications subject to change without notice.

MECHANICAL DATA

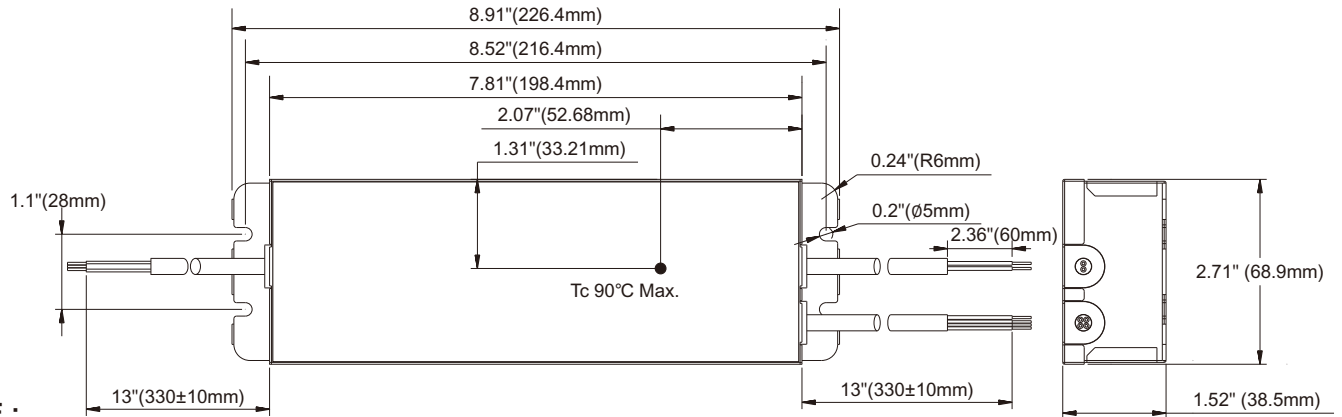

NOTE :

- 1.This Driver Must Be Installed By A Licensed Electrician
- 2.This Driver Must Be Grounded

Tolerance=±0.02"

WARNING

1.To prevent damage to the LED driver, Orange and Yellow R-set / NTC / PRG inputs must never make contact with LED output.

2.FCC WARNING

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
(1).This device may not cause harmful interference, and
(2).This device must accept any interference received, including interference that may cause undesired operation.


Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

INPUT SIDE	LENGTH
BROWN	13"[330mm]
BLUE	13"[330mm]
GR/YW	13"[330mm]

OUTPUT SIDE	LENGTH
BLACK	13"[330mm]
RED	13"[330mm]

Programming SIDE	LENGTH
YELLOW	13"[330mm]
ORANGE	13"[330mm]

Dimming SIDE	LENGTH
GARY	13"[330mm]
PURPLE	13"[330mm]

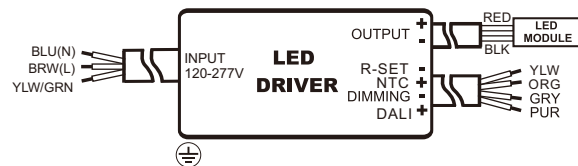

TPSB-100:

Only for luminaire manufacturer not for end user. For detail information on using TPSB-100 Driver Programming Box, please consult user's manual of TPSB-100.

