




Discontinued
Contact Fulham for availability. Not for use in new designs.

T1A1UNV150P-40L SPECIFICATIONS

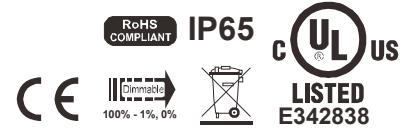

- Programmable LED Driver
- Output Wattage: 40W
- Universal Voltage (120V-277V)
- CC Programmable 250-1500mA
- Dali Dimming
- Long Case and Wire
- Output voltage range of 10-57VDC
- IP65

General Specifications

Input Voltage	120-277VAC, 50/60 Hz
Input Current	0.45A
Input Power	50W
Power Factor	>0.9
THD	<20%
Efficiency	88% Typical
Driver Type	Constant Current
Output Current	250-1500mA Programmable; See Label for Set Current; To Program R-set (Figure 1) or TPSB100 (Programmer); Record New Setting On 1" x 0.5" Label
Output Voltage Range	10-57VDC (250-1500mA)
Output Power	40W Max.
Number of Output Channels	1 Channel
Dimming Controller Type/Dimming Range	DALI / 100%-1%, 0% (Figure 2 , 3)
RFI/EMI	FCC Part 15B Consumer, EN55015
Output Type	LED Class 2
Potting Type / Degree of Fill	Potting As Per ASTM D36-86 / Fully Potted
Ambient Operating Temperature Range	-40°C to 60°C (-40°F to 140°F)
Max. Case Temperature	90°C (194°F)
Sound Rating	A
Input Surge Protection	Line-Neutral 4kV, Line & Neutral-Ground 6kV
Protections	Input Current Protection
	Output Short Circuit Protection
	Output Open Circuit Protection
	Output to Ground Short Protection
	Overload Protection
	Over Temperature Protection
Service Life	50,000 hours @Tc 85°C (185°F)
Approvals / Class	LED Class2, UL Listed, Class P, Type HL, Dry or Damp Locations, I 65,FCE, Pending
Warranty	5 years

Figure 1


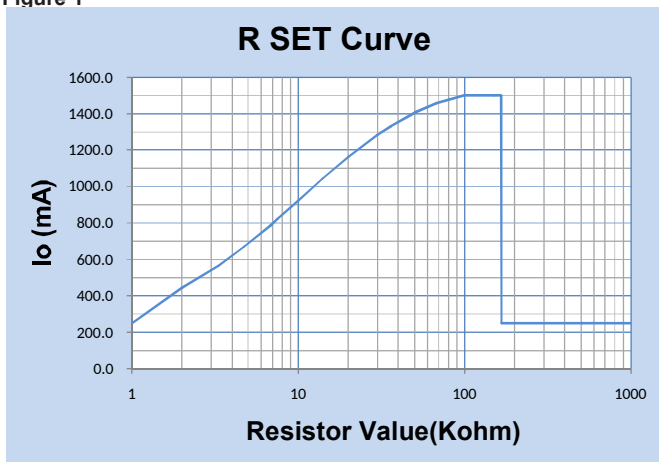


Figure 2

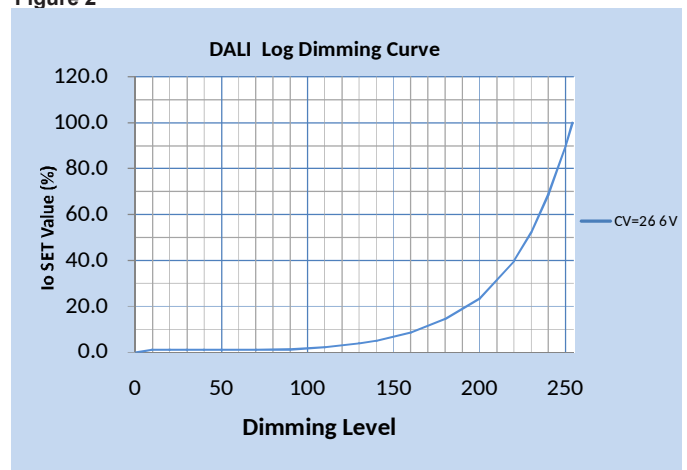

Fulham extends a limited warranty to the original purchaser or first user for a period of 5 years @ Tc 85°C from the date of manufacture when properly installed and operated under normal conditions of use. The usage of appropriate series connected Surge Protection Device (SPD) is required in high risk applications. For complete terms and conditions, please refer to the Warranty Center at www.fulham.com. Specifications subject to change without notice.

Figure 3

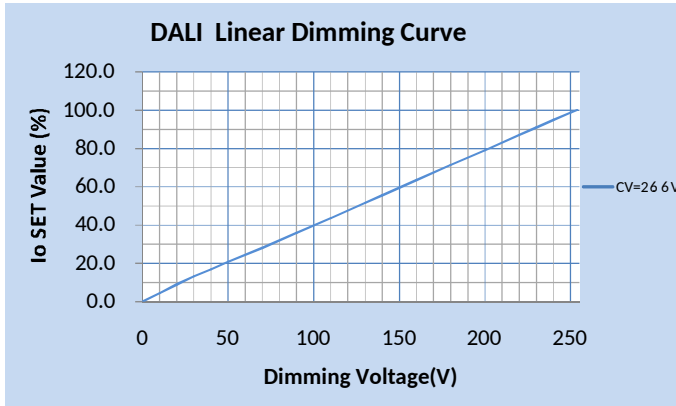


Figure 4

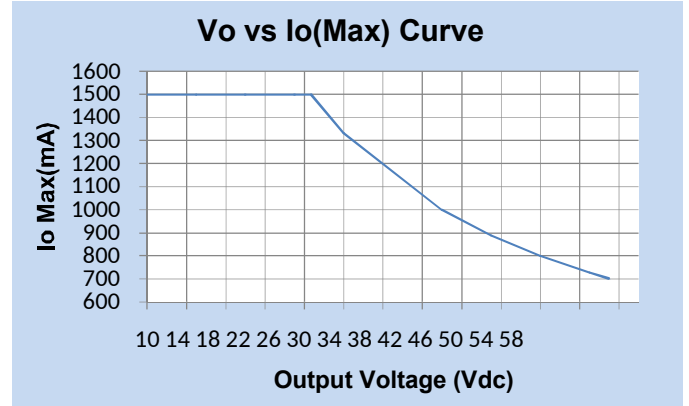


Figure 5

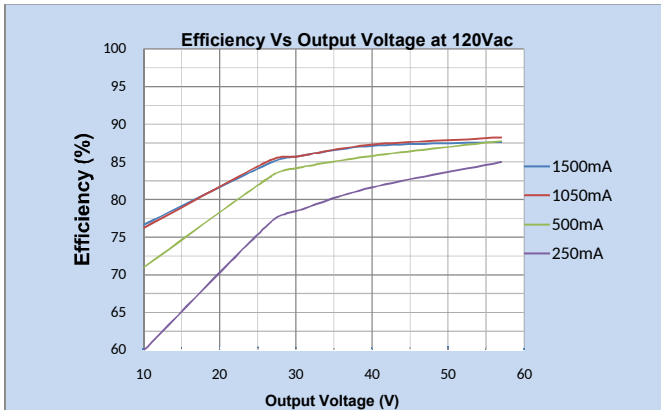


Figure 6

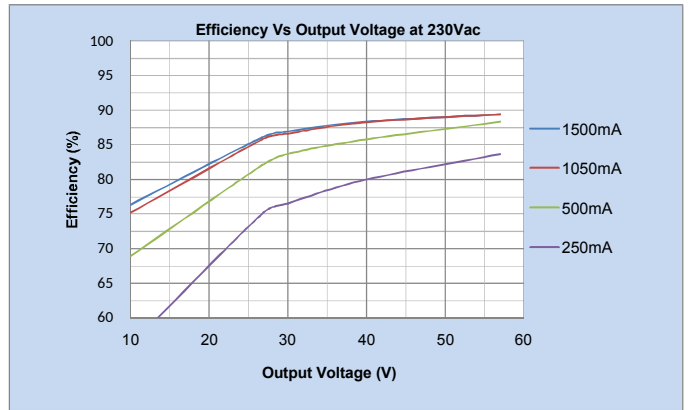


Figure 7


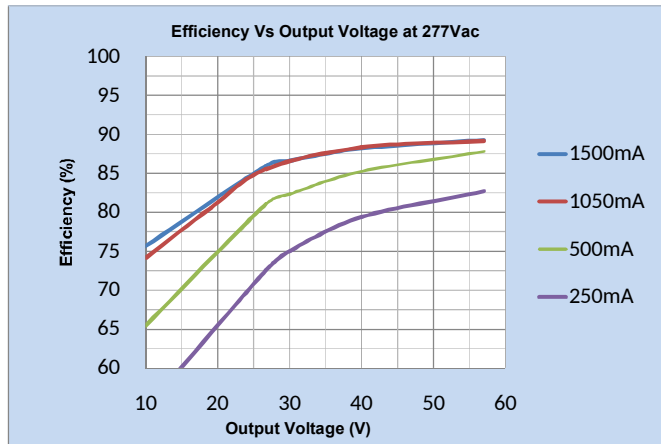


Figure 8

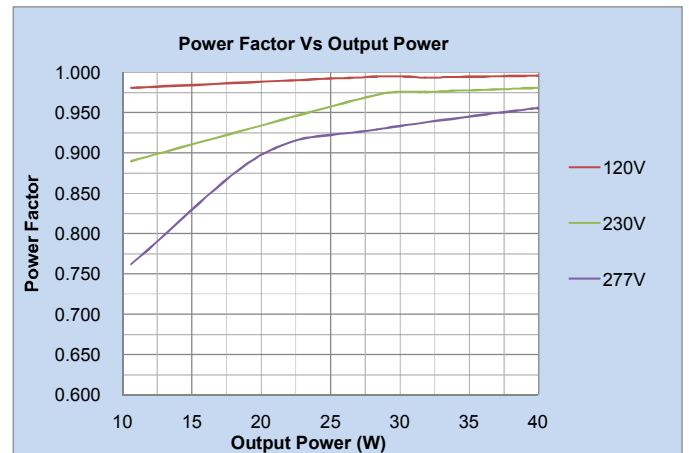

Fulham extends a limited warranty to the original purchaser or first user for a period of 5 years @ Tc 85°C from the date of manufacture when properly installed and operated under normal conditions of use. The usage of appropriate series connected Surge Protection Device (SPD) is required in high risk applications. For complete terms and conditions, please refer to the Warranty Center at www.fulham.com. Specifications subject to change without notice.

Figure 9

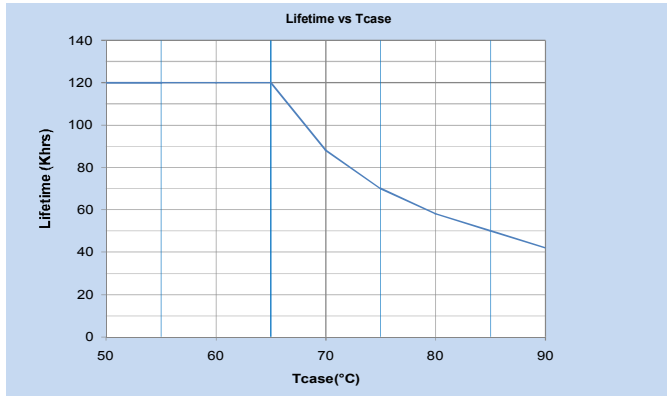


Figure 10

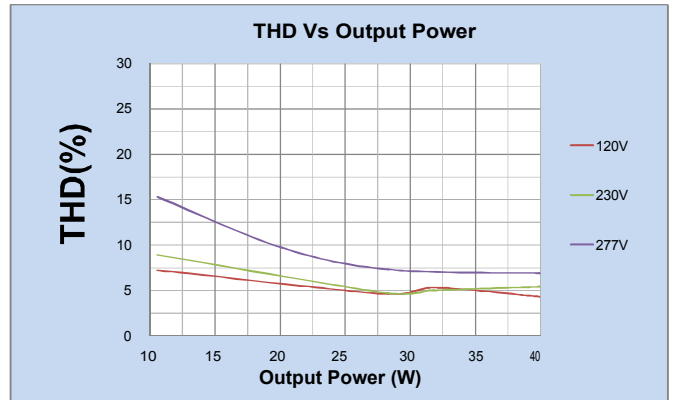


Figure 11


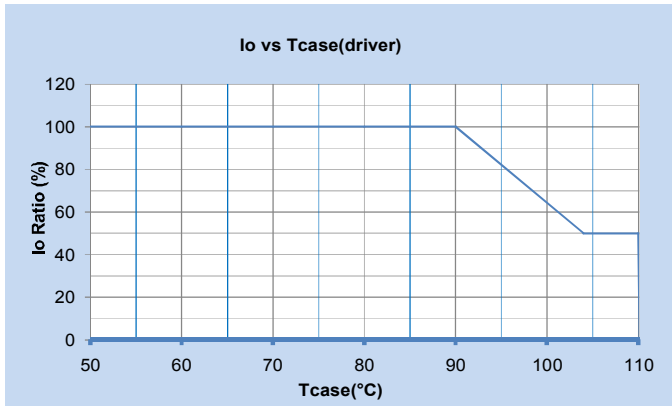



Figure 12

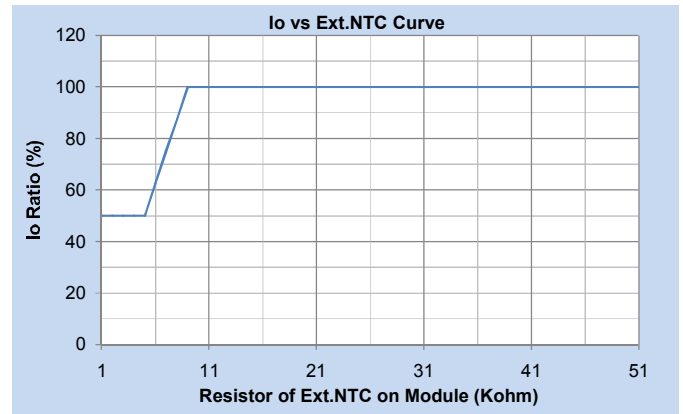

Mechanical Data

NOTE :

- 1.This Driver Must Be Installed By A Licensed Electrician
- 2.This Driver Must Be Grounded

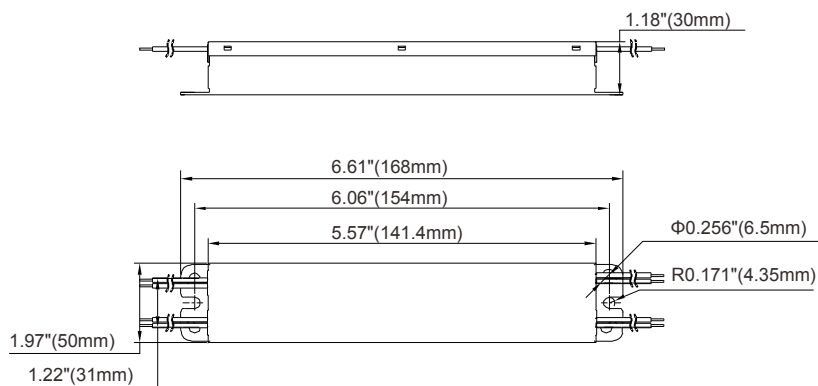


Fulham extends a limited warranty to the original purchaser or first user for a period of 5 years @ Tc 85°C from the date of manufacture when properly installed and operated under normal conditions of use. The usage of appropriate series connected Surge Protection Device (SPD) is required in high risk applications. For complete terms and conditions, please refer to the Warranty Center at www.fulham.com. Specifications subject to change without notice.

Wiring Diagrams

INPUT SIDE	LENGTH
WHITE	13.0" [330mm]
BLACK	13.0" [330mm]
PURPLE	13.0" [330mm]
GREY	13.0" [330mm]

OUTPUT SIDE	LENGTH
RED	13.0" [330mm]
BLUE	13.0" [330mm]
YELLOW	9.8" [250mm]
ORANGE	9.8" [250mm]

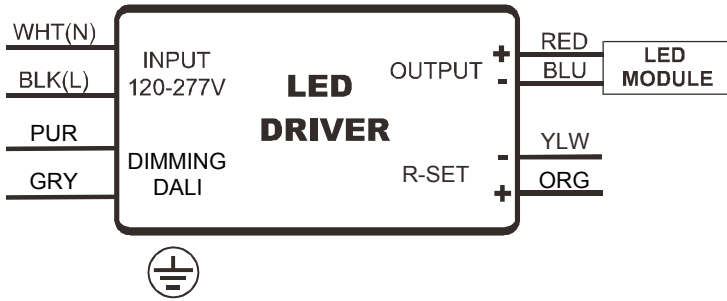

TPSB-100 Programming Controller

Please consult the user manual for instructions on using the TPSB-100 SmartSet programming controller

